


## Thermally-Enhanced High Power RF LDMOS FET 500 W, 50 V, 390 – 450 MHz

### Description

The PTVA035002EV LDMOS FET is designed for use in power amplifier applications in the 390 MHz to 450 MHz frequency band. Features include high gain and thermally-enhanced package with bolt-down flange. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTVA035002EV  
Package H-36275-4

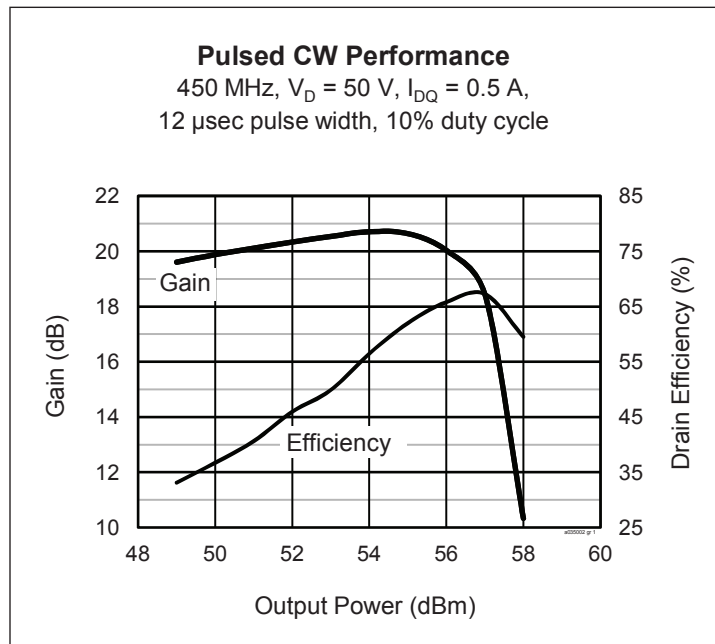

### Features

- Unmatched input and output
- High gain and efficiency
- Integrated ESD protection
- Low thermal resistance
- Pb-free and RoHS-compliant
- Capable of withstanding a 13:1 load mismatch at 57 dBm under pulsed conditions: 12  $\mu\text{sec}$  pulse width, 10% duty cycle

### RF Characteristics

**Pulsed CW Class AB Characteristics** (not subject to production test, verified by design/characterization in Infineon test fixture)  
 $V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 0.5\text{ A}$ ,  $P_{OUT} = 500\text{ W}$ ,  $f = 450\text{ MHz}$ , 12  $\mu\text{sec}$  pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	—	18	—	dB
Drain Efficiency	$\eta_D$	—	64	—	%

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## RF Characteristics

### Pulsed CW Characteristics (tested in Infineon test fixture)

$V_{DD} = 50\text{ V}$ ,  $V_{GS} = 2.9\text{ V}$ ,  $I_{DQ} = 0.0\text{ A}$ ,  $P_{OUT} = 500\text{ W}$ ,  $f = 450\text{ MHz}$ , 12  $\mu\text{sec}$  pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	14.75	15.5	—	dB
Drain Efficiency	$\eta_D$	63	66	—	%

### DC Characteristics (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1.0	$\mu\text{A}$
	$V_{DS} = 105\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10.0	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.1	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 50\text{ V}$ , $I_{DQ} = 600\text{ mA}$	$V_{GS}$	—	3.70	—	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1.0	$\mu\text{A}$





## Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Junction Temperature	$T_J$	200	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}$ , 300 W CW)	$R_{\theta JC}$	0.20	$^{\circ}\text{C/W}$


## Ordering Information

Type and Version	Order Code	Package Description	Shipping
PTVA035002EV V1	PTVA035002EVV1XWSA1	H-36275-4, bolt-down	Tray

**Typical Performance** (data taken in production test fixture)

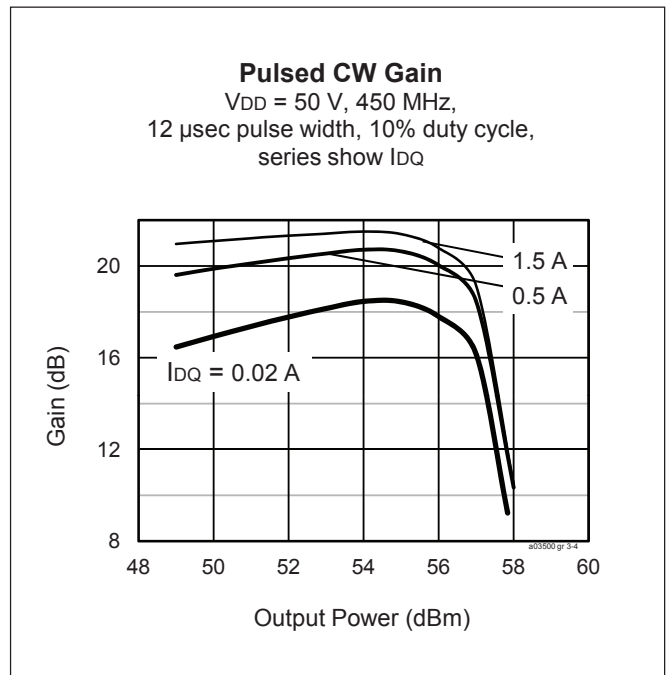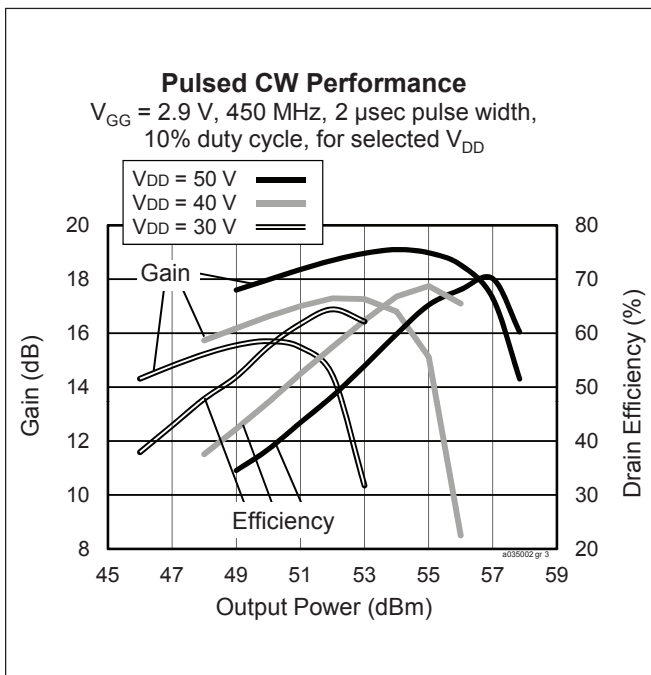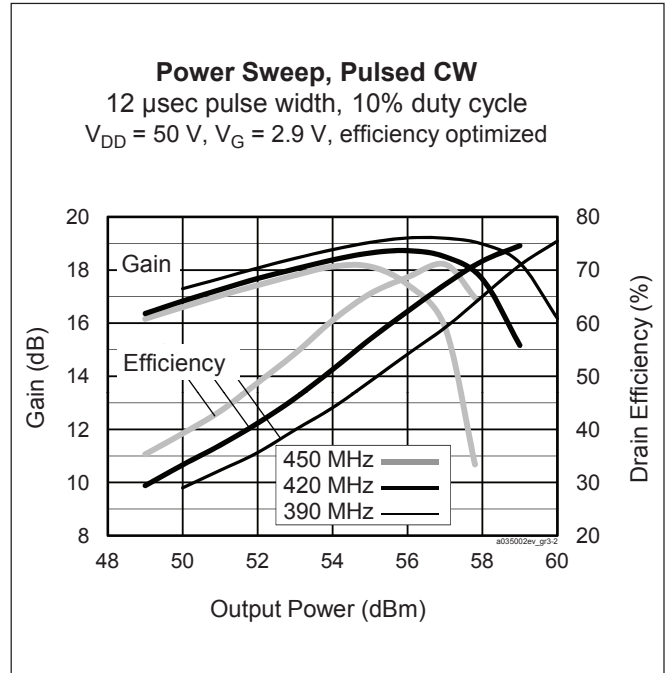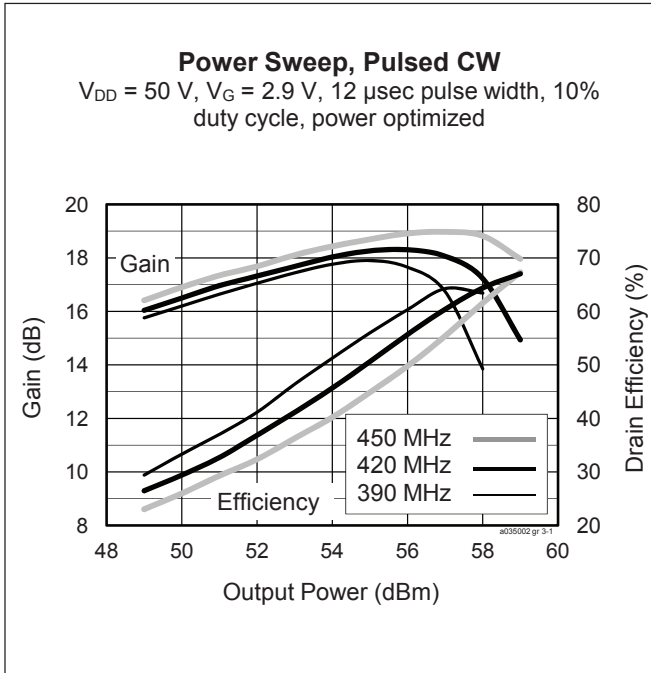


Typical Performance (cont.)

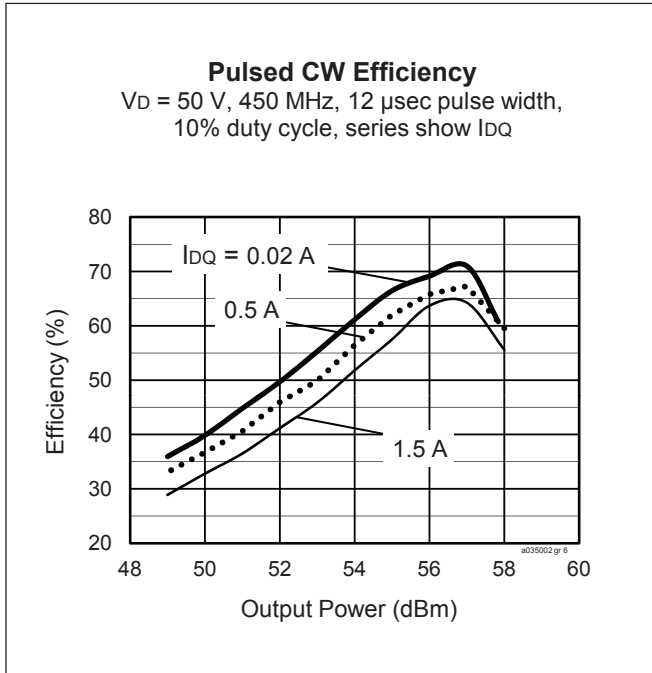


Broadband Circuit Impedance

Frequency MHz	Z Source $\Omega$		Z Load $\Omega$	
	R	jX	R	jX
390	1.28	-0.12	1.80	-2.22
405	1.35	0.18	1.86	-1.91
420	1.43	0.48	1.92	-1.62
435	1.54	0.76	1.98	-1.35
450	1.67	1.04	2.02	-1.11

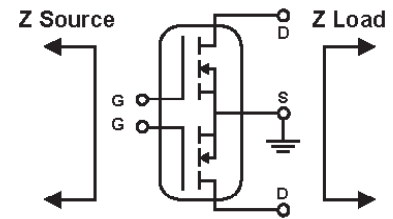

Reference Circuit, 390 – 450 MHz

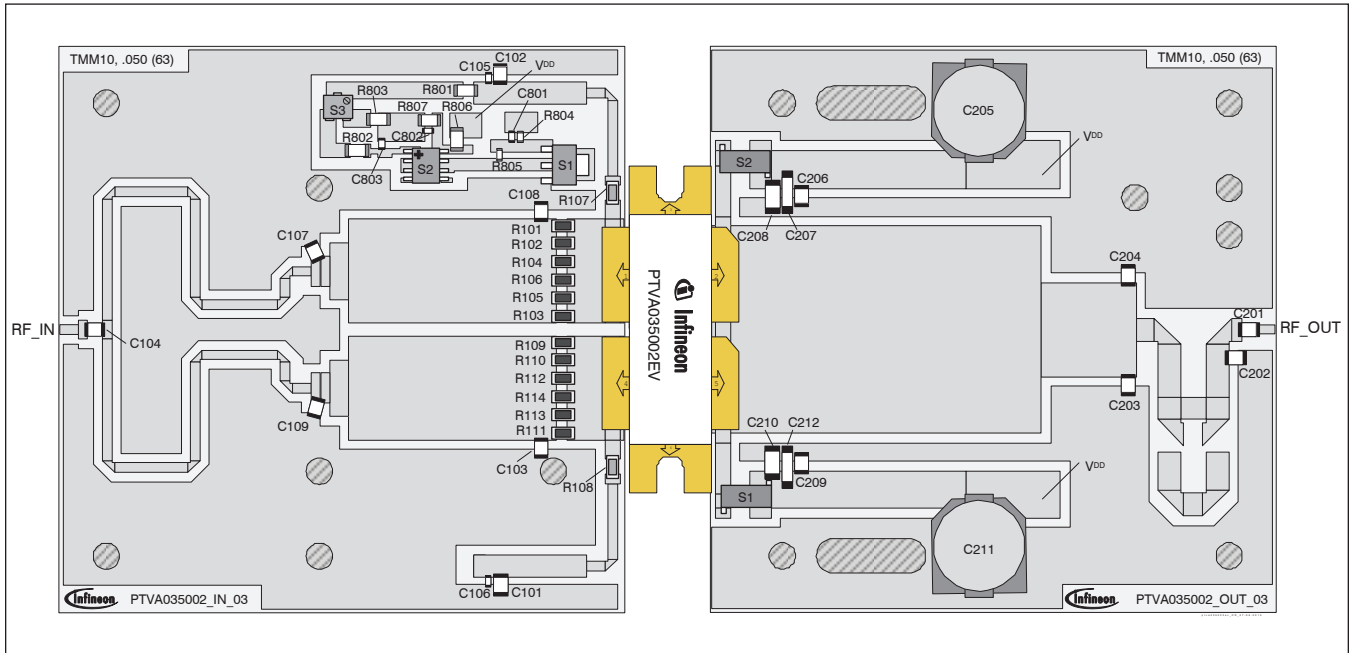

Reference circuit assembly diagram (not to scale)\*

Find Gerber files for this test fixture on the Infineon Web site at [www.infineon.com/rfpower](http://www.infineon.com/rfpower)

**Reference Circuit** (cont.)


**Reference Circuit Assembly**

DUT	PTVA035002EV
Test Fixture Part No.	LTN/PTVA035002EV
PCB	Rogers TMM10, 1.27 mm [0.050"] thick, 2 oz. copper, $\epsilon_r = 9.2$

**Components Information**

Component	Description	Suggested Manufacturer	P/N
<b>Input</b>			
C101, C102, C104	Capacitor, 300 pF	ATC	ATC100B301KW200X
C103, C108	Capacitor, 20 pF	ATC	ATC100B200KW500X
C105, C106, C801, C802, C803	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
C107, C109	Capacitor, 6.2 pF	ATC	ATC100B6R2CT500X
R101, R102, R103, R104, R105, R106, R109, R110, R111, R112, R113, R114	Resistor, 5.6 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ5R6V
R107, R108	Resistor, 1000 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ102V
R801	Resistor, 100 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ101V
R802	Resistor, 2000 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ202V
R803	Resistor, 3600 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ362V
R804	Resistor, 1300 $\Omega$	Panasonic Electronic Components	ERJ-3GEYJ132V
R805	Resistor, 1200 $\Omega$	Panasonic Electronic Components	ERJ-3GEYJ122V
R806	Resistor, 2400 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ242V
R807	Resistor, 6200 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ622V
S1	Transistor	Infineon Technologies	BCP56
S2	Voltage regulator	Texas Instruments	LM7805
S3	Potentiometer	Bourns Inc.	3224W-1-202E
<b>Output</b>			
C201, C206, C209	Capacitor, 300 pF	ATC	ATC100B301KW200X
C202	Capacitor, 3 pF	ATC	ATC100B3R0CW500X
C203, C204	Capacitor, 4.3 pF	ATC	ATC100B4R3CW500X
C205, C211	Capacitor, 100 $\mu$ F	United Chemi-Con	EMVE101ARA101MKE0S
C207, C212	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X7S2A106M230KB
C208, C210	Capacitor, 2.2 $\mu$ F	TDK Corporation	C4532X7R2A225K230KA
S1, S2	Inductor, 17.5 nH	Coilcraft	B06TGLB

## Package Outline Specifications

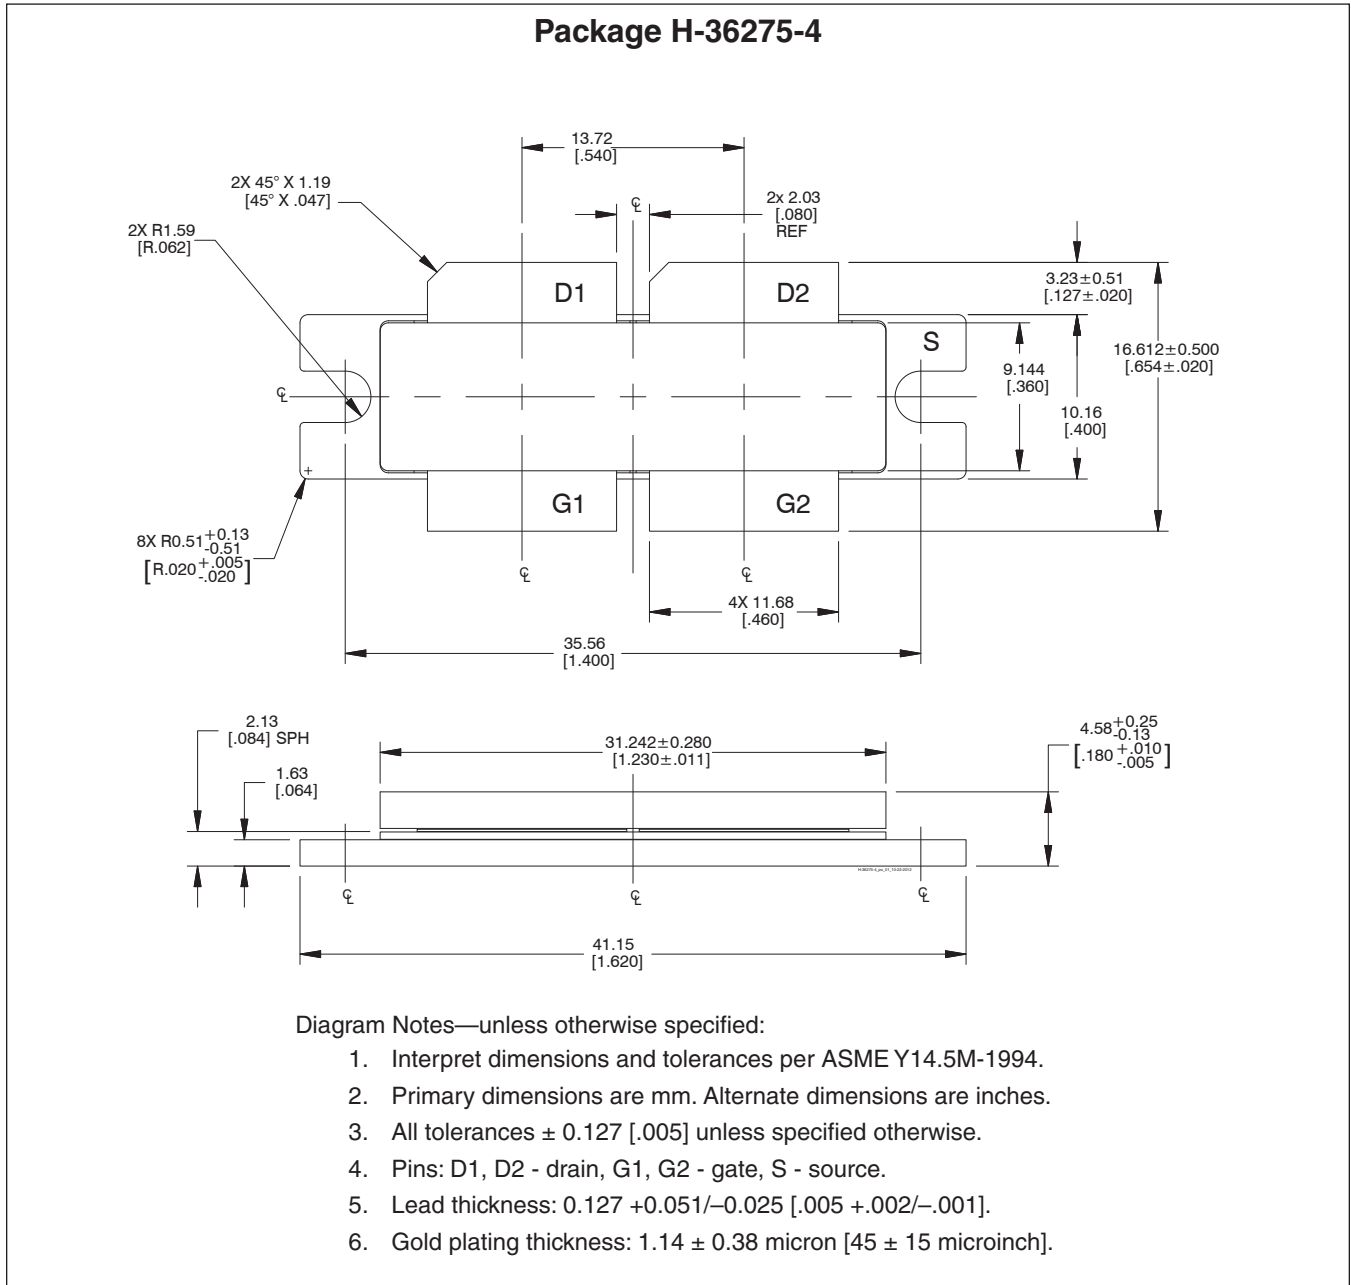

Find the latest and most complete information about products and packaging at the Infineon Internet page <http://www.infineon.com/rfpower>

**Revision History:** 2013-07-10 Data Sheet

Previous Version: 2012-02-24, Data Sheet

Page	Subjects (major changes since last revision)
2	Updated DC Characteristics and Maximum Ratings tables, Corrected order code
5, 6, 7, 8	Removed circuit schematics, corrected circuit diagram & component information

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.


Please send your proposal (including a reference to this document) to:

[highpowerRF@infineon.com](mailto:highpowerRF@infineon.com)

To request other information, contact us at:

+1 877 465 3667 (1-877-GO-LDMOS) USA

or +1 408 776 0600 International



**Edition 2013-07-10**

**Published by**

**Infineon Technologies AG**

**85579 Neubiberg, Germany**

**© 2010 Infineon Technologies AG**

**All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com/rfpower](http://www.infineon.com/rfpower)).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.