

# TVS Diode

Transient Voltage Suppressor Diodes

## ESD5V3S1B-02LS

Bi-directional Symmetrical Medium Capacitance ESD / Transient Protection Diode

ESD5V3S1B-02LS

## Data Sheet

Revision 1.0, 2011-04-08  
Final

Industrial and Multi-Market

**Edition 2011-04-08**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2011 Infineon Technologies AG  
All Rights Reserved.**

### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

**Revision History**

Page or Item	Subjects (major changes since previous revision)
<b>Revision 1.0, 2011-04-08</b>	

**Trademarks of Infineon Technologies AG**

AURIX™, BlueMoon™, C166™, CanPAK™, CIPOS™, CIPURSE™, COMNEON™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I<sup>2</sup>RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OmniTune™, OptiMOS™, ORIGA™, PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SMARTi™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™, X-GOLD™, X-PMU™, XMM™, XPOSYS™.

**Other Trademarks**

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, μVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. Mifare™ of NXP. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2010-10-26

## Table of Contents

	<b>Table of Contents</b> .....	4
	<b>List of Figures</b> .....	5
	<b>List of Tables</b> .....	6
<b>1</b>	<b>Bi-directional Symmetrical Medium Capacitance ESD / Transient Protection Diode</b> .....	7
1.1	Features .....	7
1.2	Application Examples .....	7
<b>2</b>	<b>Product Description</b> .....	7
<b>3</b>	<b>Characteristics</b> .....	8
3.1	Electrical Characteristics at $T_A = 25\text{ °C}$ , unless otherwise specified .....	8
3.2	Typical Characteristics at $T_A=25\text{ °C}$ , unless otherwise specified .....	9
<b>4</b>	<b>Application Information</b> .....	11
<b>5</b>	<b>Ordering Information Scheme (Examples)</b> .....	12
<b>6</b>	<b>Package Information</b> .....	13
6.1	PG-TSSLP-2-1 (mm) [2] .....	13
	<b>References</b> .....	14
	<b>Terminology</b> .....	15
	<b>Predefined Names</b> .....	16

## List of Figures

Figure 2-1	Pin Configuration and Schematic Diagram	7
Figure 3-1	Definitions of electrical characteristics	8
Figure 3-2	Reverse current: $I_R = f(V_R)$	9
Figure 3-3	Reverse current: $I_R = f(T_A)$ , $V_R = 5.3\text{ V}$	10
Figure 3-4	Line capacitance: $C_L = f(V_R)$ , $f = 1\text{MHz}$	10
Figure 3-5	Clamping voltage (TLP): $I_{TLP} = f(V_{TLP})$ [1]	11
Figure 4-1	Single line, bi-directional ESD / Transient protection	11
Figure 5-1	Ordering information scheme	12
Figure 6-1	PG-TSSLP-2-1: Package overview	13
Figure 6-2	PG-TSSLP-2-1: Footprint	13
Figure 6-3	PG-TSSLP-2-1: Packing	13
Figure 6-4	PG-TSSLP-2-1: Marking (example)	13

## List of Tables

Table 2-1	Ordering Information	7
Table 3-1	Maximum Ratings at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified	8
Table 3-2	DC Characteristics at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified	8
Table 3-3	RF Characteristics at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified	9
Table 3-4	ESD Characteristics at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified	9

# 1 Bi-directional Symmetrical Medium Capacitance ESD / Transient Protection Diode

## 1.1 Features

- ESD / transient protection of signal lines in low voltage applications according to:
  - IEC61000-4-2 (ESD):  $\pm 20$  kV (contact)
  - IEC61000-4-4 (EFT): 40 A / 2 kV (5/50 ns)
  - IEC61000-4-5 (surge): 5 A (8/20  $\mu$ s)
- Bi-directional, symmetrical working voltage up to  $V_{RWM} = \pm 5.3$  V
- Low clamping voltage, low dynamic resistance  $R_{DYN} = 0.5 \Omega$  (typical)
- Smallest form factor: 0.62 x 0.32 x 0.31 mm<sup>3</sup>
- Pb-free (RoHS compliant) and halogen free package



## 1.2 Application Examples

- Audio line protection
- Mobile communication, Consumer products (STB, MP3, DVD, DSC...)
- LCD displays, keypads, trackball protection, camera
- Notebooks and desktop computers, peripherals

# 2 Product Description

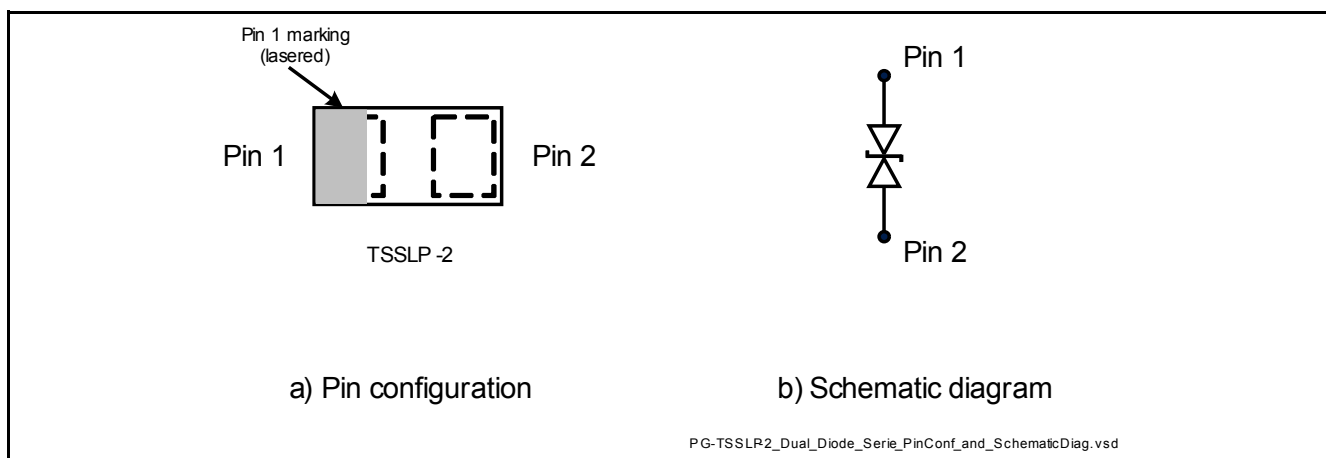


Figure 2-1 Pin Configuration and Schematic Diagram

Table 2-1 Ordering Information

Type	Package	Configuration	Marking code
ESD5V3S1B-02LS	PG-TSSLP-2-1	1 line, bi-directional	H

### 3 Characteristics


**Table 3-1 Maximum Ratings** at  $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
ESD contact discharge <sup>1)</sup>	$V_{ESD}$	–	–	20	kV
Peak pulse current ( $t_p = 8/20\ \mu\text{s}$ ) <sup>2)</sup>	$I_{PP}$	–	–	5	A
Operating temperature range	$T_{OP}$	-40	–	125	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55	–	150	$^\circ\text{C}$

1)  $V_{ESD}$  according to IEC61000-4-2

2)  $I_{PP}$  according to IEC61000-4-5

#### 3.1 Electrical Characteristics at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified

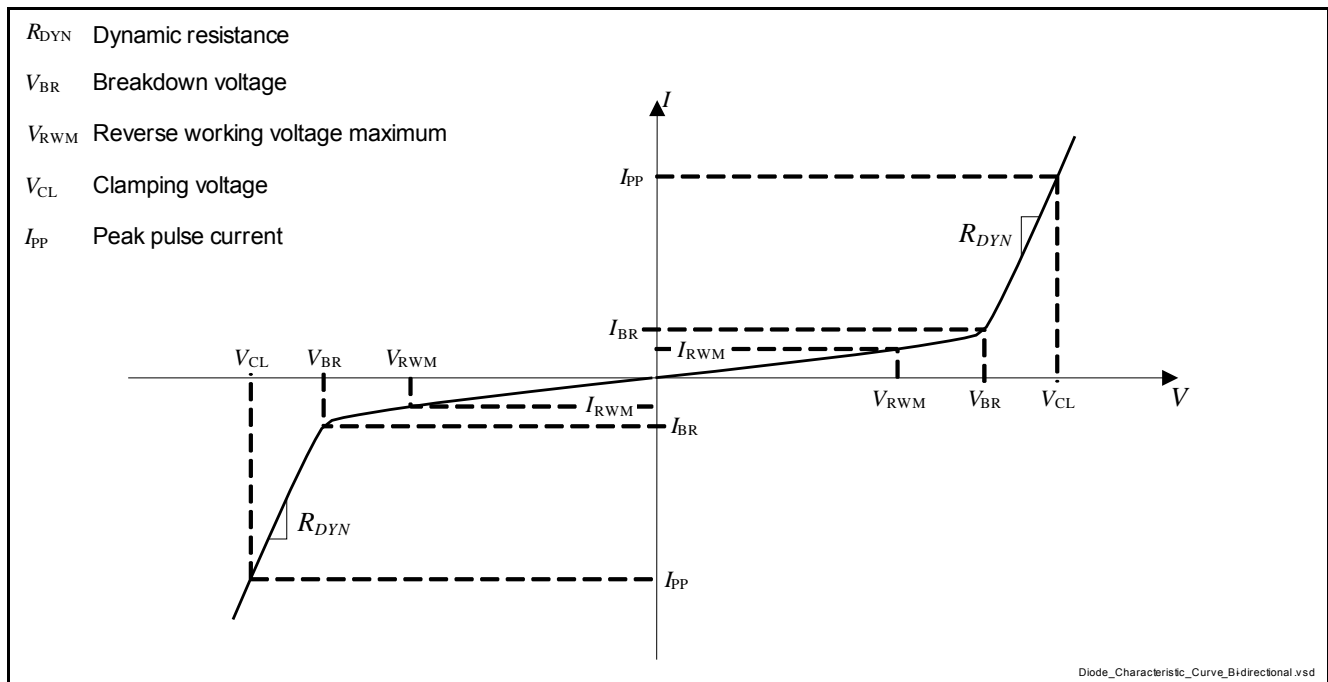

**Figure 3-1 Definitions of electrical characteristics**

**Table 3-2 DC Characteristics** at  $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Reverse working voltage	$V_{RWM}$	-5.3	–	5.3	V	
Breakdown voltage	$V_{BR}$	6	–	–	V	$I_R = 1\text{ mA}$
Reverse current	$I_R$	–	–	0.1	$\mu\text{A}$	$V_R = 3.3\text{ V}$



**Table 3-3 RF Characteristics at  $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified**


Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Line capacitance	$C_L$	–	17	20	pF	$V_R = 0\text{ V}, f = 1\text{ MHz}$

**Table 3-4 ESD Characteristics at  $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Reverse clamping voltage <sup>1)</sup> [2]	$V_{CL}$	–	18	–	V	$I_{PP} = 16\text{ A}$
		–	26	–	V	$I_{PP} = 30\text{ A}$
Dynamic resistance <sup>1)</sup> [2]	$R_{DYN}$	–	0.5	–	$\Omega$	

1) Please refer to Application Note AN210. TLP parameter:  $Z_0 = 50\ \Omega$ ,  $t_p = 100\text{ ns}$ ,  $t_r = 300\text{ ps}$ , averaging window:  $t_1 = 30\text{ ns}$  to  $t_2 = 60\text{ ns}$ , extraction of dynamic resistance using least squares fit of TLP characteristics between  $I_{PP1} = 10\text{ A}$  and  $I_{PP2} = 40\text{ A}$ .

### 3.2 Typical Characteristics at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified

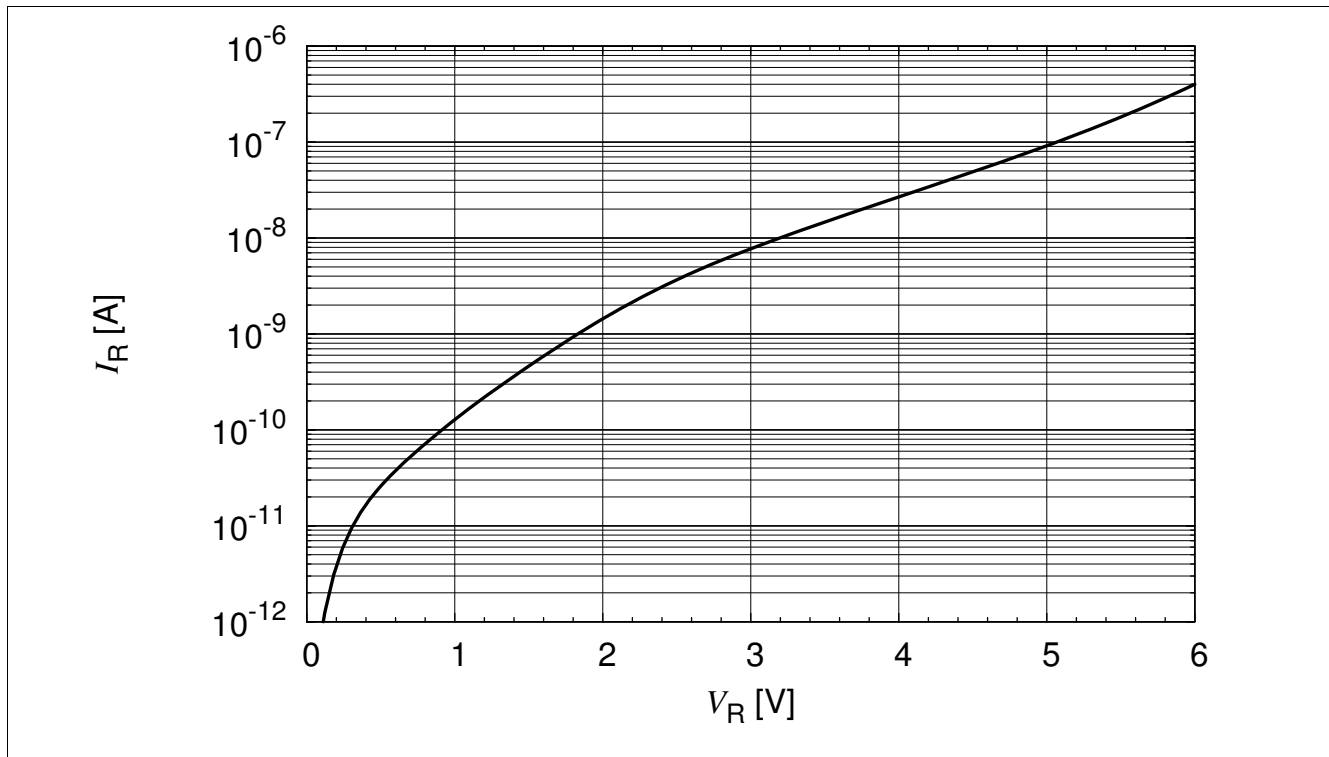

**Figure 3-2 Reverse current:  $I_R = f(V_R)$**

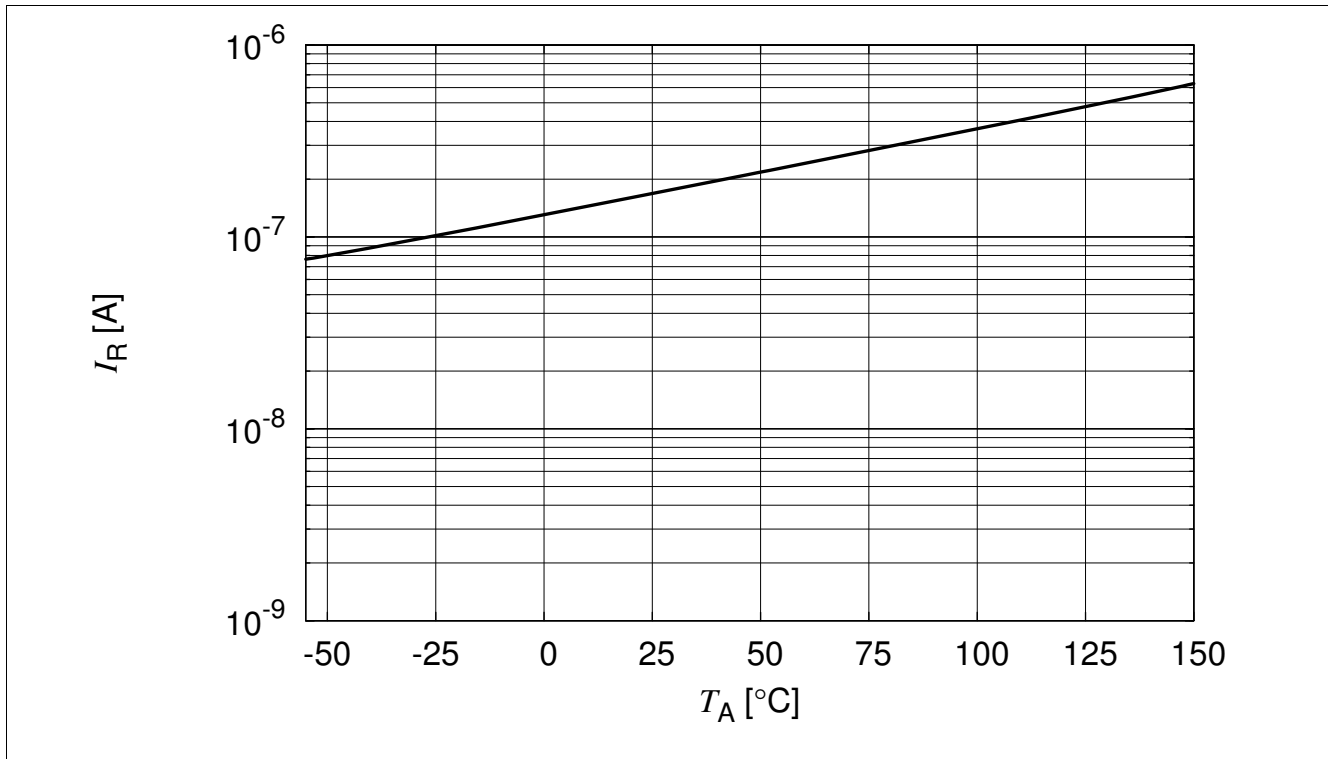


Figure 3-3 Reverse current:  $I_R = f(T_A)$ ,  $V_R = 5.3$  V

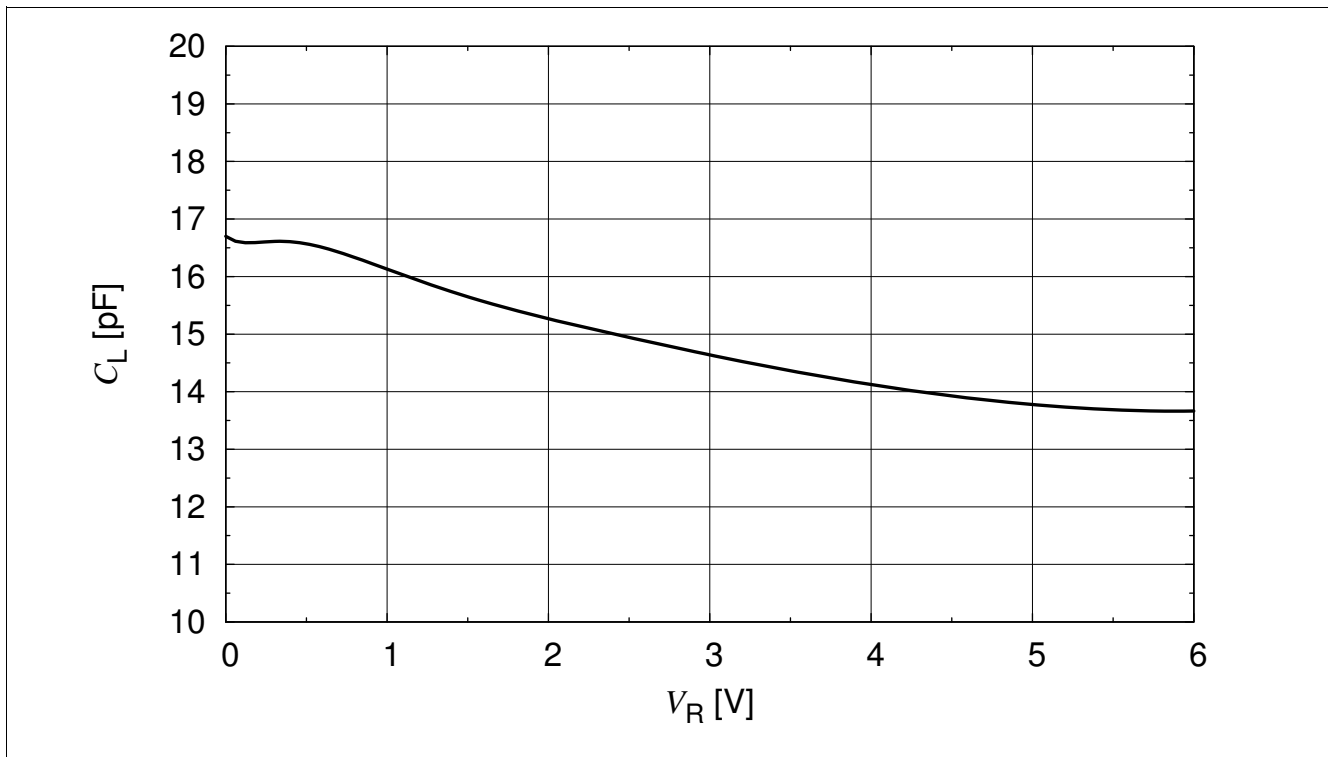


Figure 3-4 Line capacitance:  $C_L = f(V_R)$ ,  $f = 1$  MHz

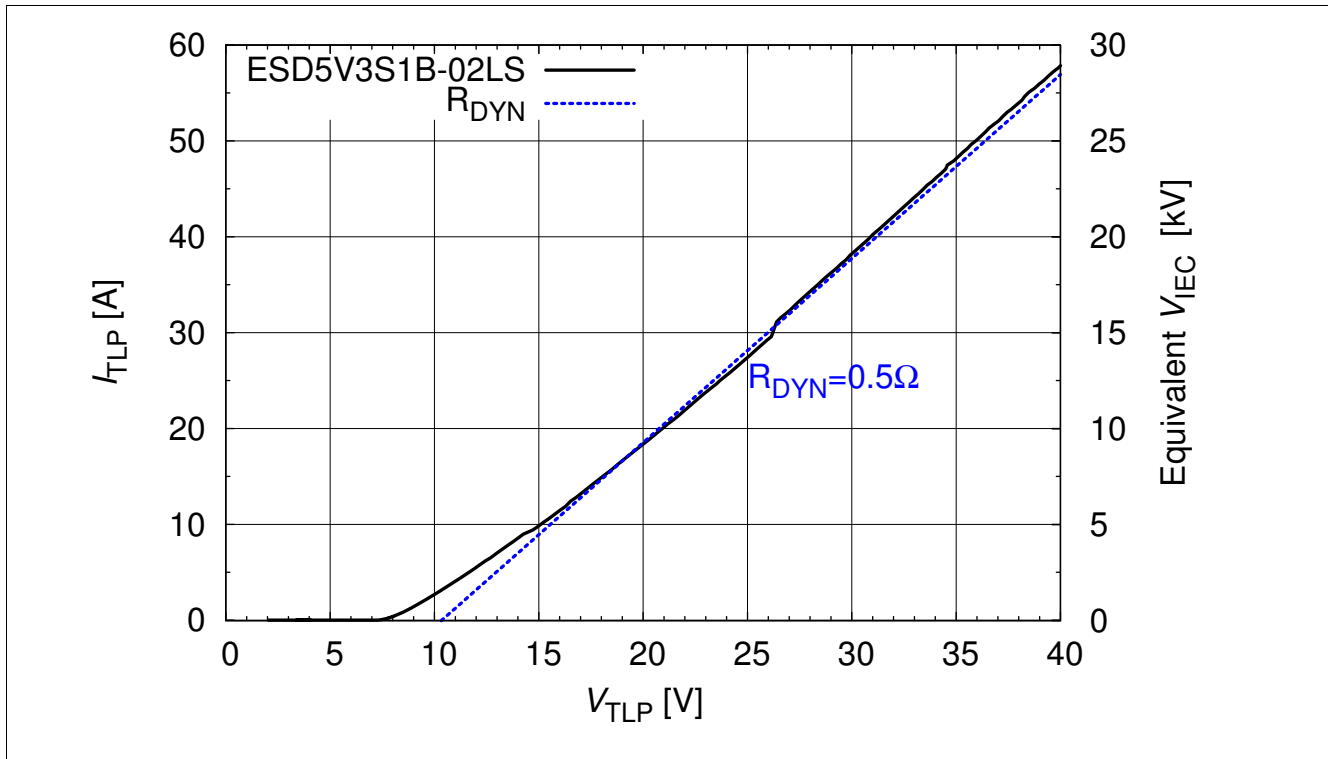


Figure 3-5 Clamping voltage (TLP):  $I_{TLP} = f(V_{TLP})$  [1]

## 4 Application Information

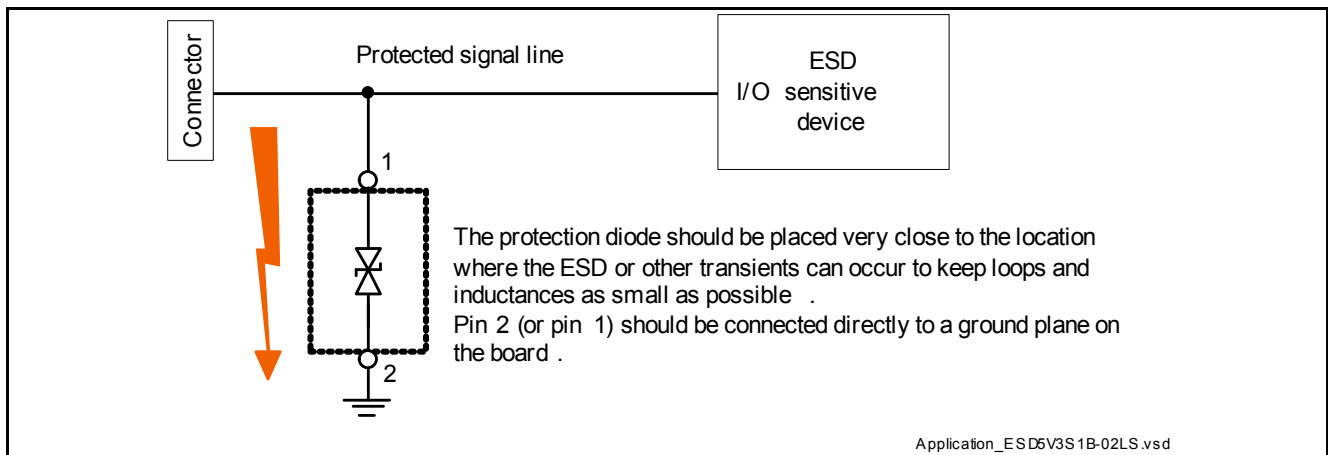


Figure 4-1 Single line, bi-directional ESD / Transient protection

## 5 Ordering Information Scheme (Examples)

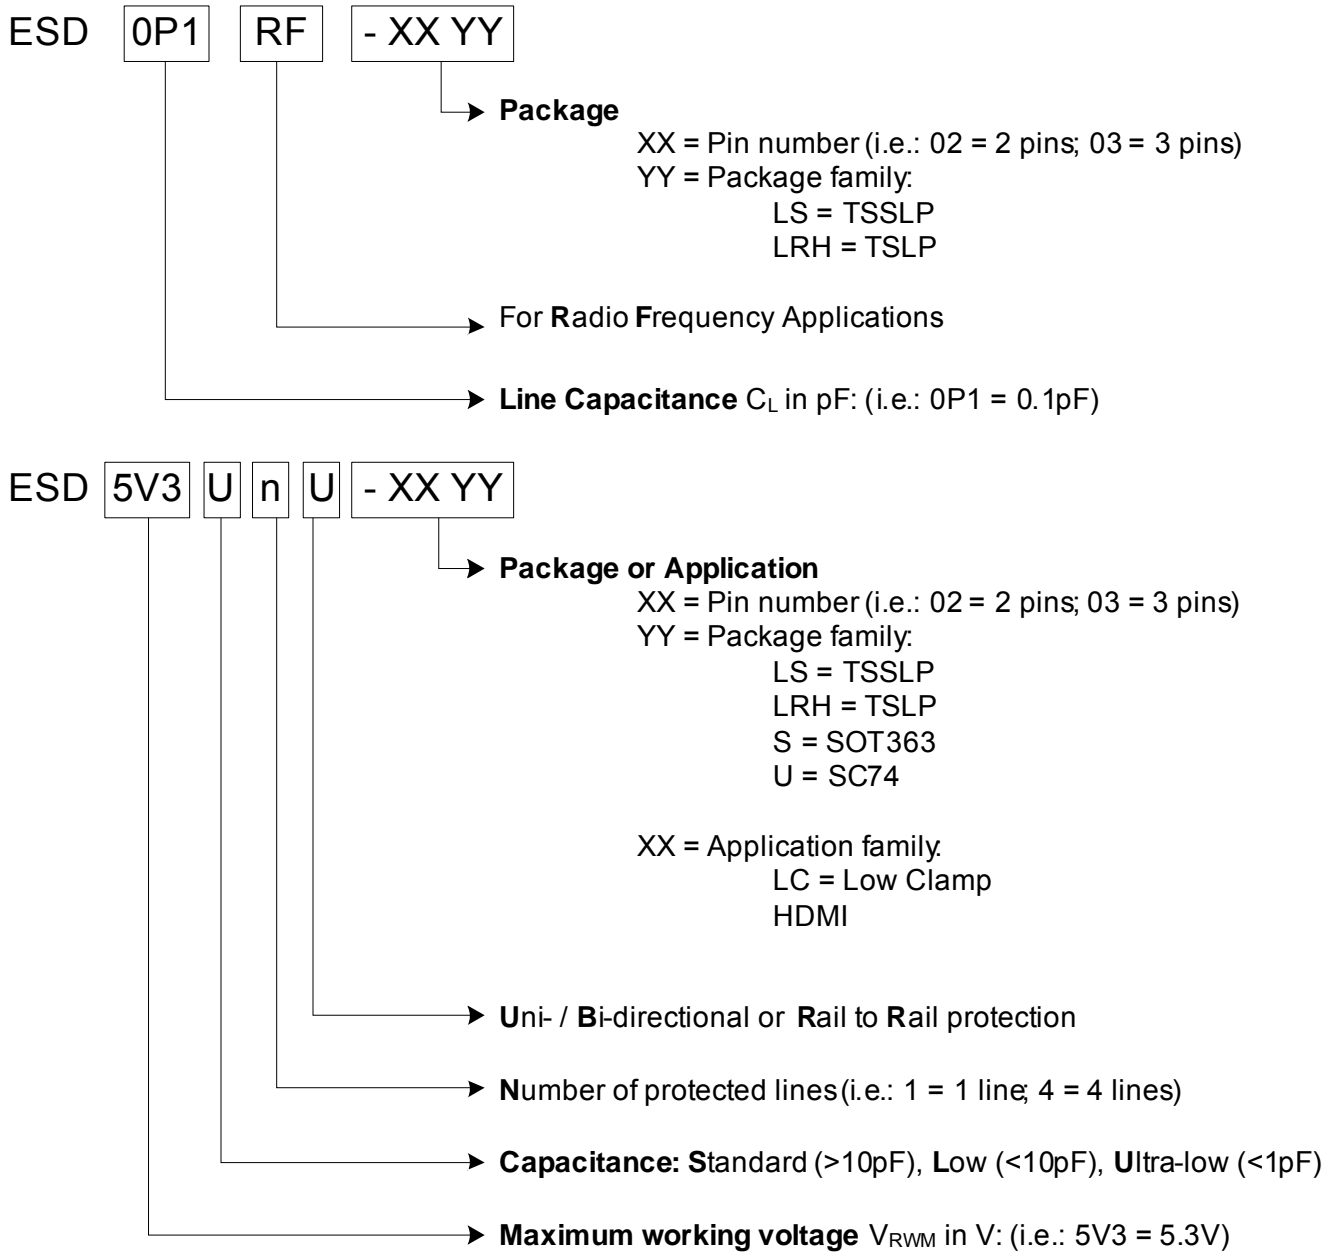


Figure 5-1 Ordering information scheme

## 6 Package Information

### 6.1 PG-TSSLP-2-1 (mm) [2]

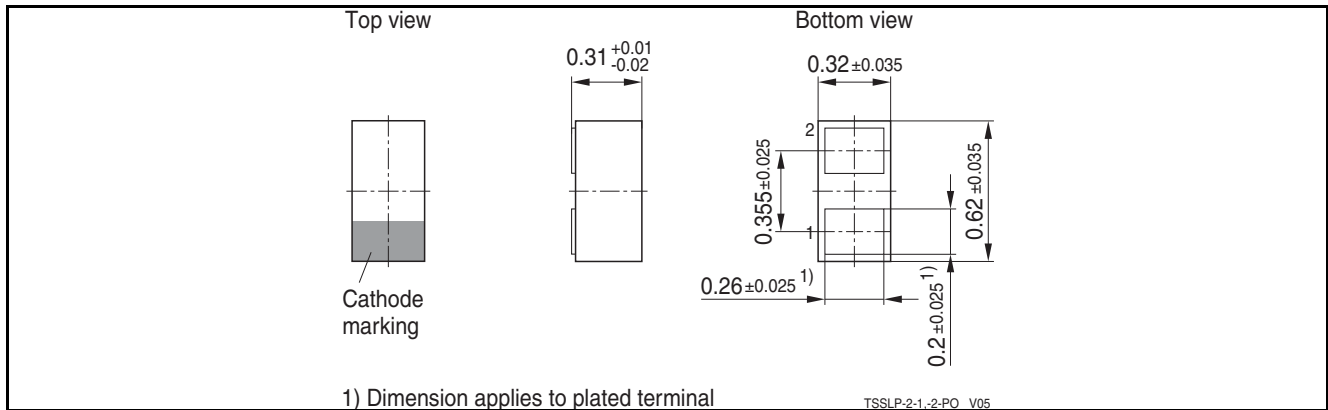


Figure 6-1 PG-TSSLP-2-1: Package overview

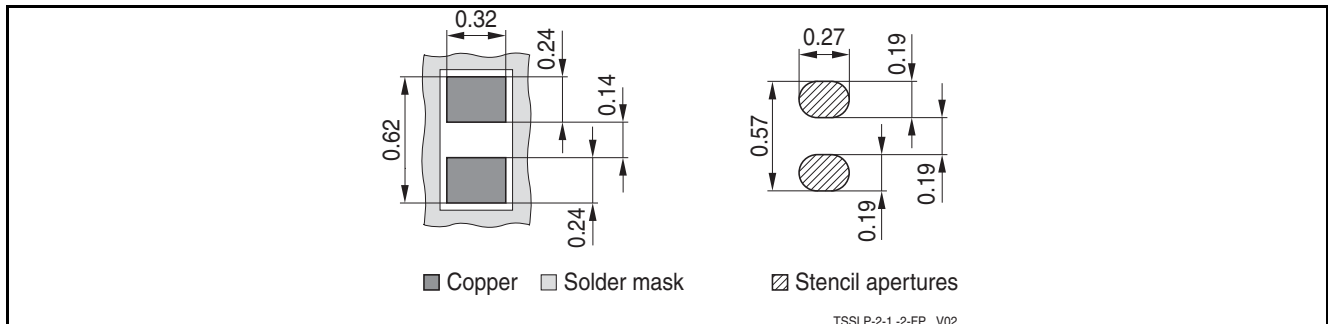


Figure 6-2 PG-TSSLP-2-1: Footprint

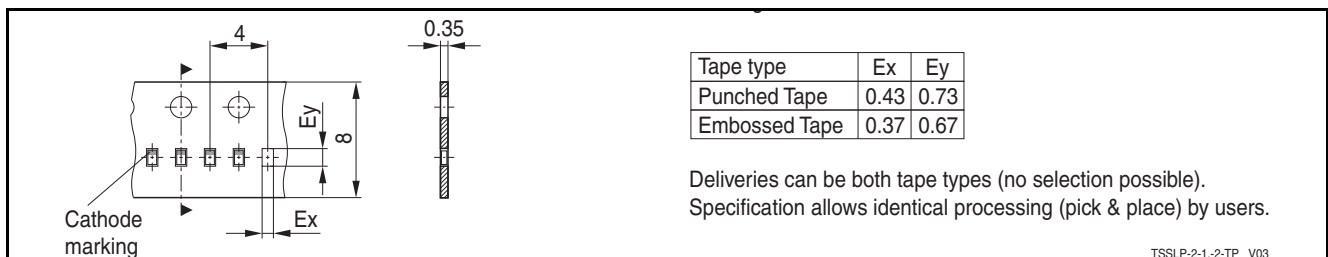


Figure 6-3 PG-TSSLP-2-1: Packing

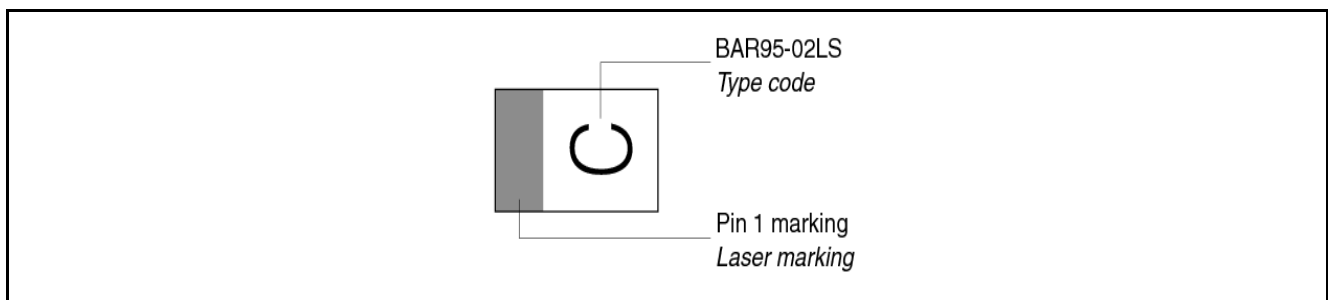


Figure 6-4 PG-TSSLP-2-1: Marking (example)

**References**

- [1] Infineon AG - **Application Note AN210**: Effective ESD Protection design at System Level Using VF-TLP Characterization Methodology
- [2] Infineon AG - Recommendations for PCB Assembly of Infineon TSLP and TSSLP Packages

## Terminology

$C_L$	Line capacitance
DSC	Digital Still Camera
DVD	Digital Versatile Disc
EFT	Electrical Fast Transient
ESD	Electrostatic Discharge
$I_{PP}$	Peak pulse current
$I_R$	Reverse current
LCD	Liquid Crystal Display
MP3	Audio player device based on MPEG Audio Layer III
$P_{PK}$	Peak pulse power
$R_{DYN}$	Dynamic resistance
RoHs	Restriction of Hazardous Substance directive
STB	Set-Top-Box
$T_A$	Ambient temperature
$T_{OP}$	Operation temperature
$t_p$	Pulse duration
$T_{stg}$	Storage temperature
$V_{BR}$	Breakdown voltage
$V_{CL}$	Reverse clamping voltage
$V_{ESD}$	Electrostatic discharge voltage
$V_R$	Reverse voltage
$V_{RWM}$	Reverse working voltage maximum

## Predefined Names

Name	Initial Cross-Reference
X-GOLD	<b>X-GOLD</b>
XMM	<b>XMM</b>

### Definition of “Predefined Names”

Frequently used expressions, such as component names, file names, tools releases, version numbers, proprietary variables and software links, can be used in a similar way as user variables. However, they must be listed in a special table and **not** in the standard file “Variables”.

### Correct Usage

Steps:

1. Insert all expressions into the left column of the above table.
2. Insert an initial Cross-Reference into the right column of the same row. The initial Cross-Reference is necessary to ensure that a single ID is used in all your documents using the “Predefined\_Names.fm” file (Example: **X-GOLD** has the unique ID = CHDGHJGH).
3. Insert a Cross-Reference (Element “CrossReference”) into your document to the Element Identifier of the “Predefined\_Names.fm” file. Set the output format of the Cross-Reference to “Variable” (example: X-GOLD).

### Notes

1. All documents in a project (such as XMM) and within a book should use the same file “Predefined Names”. This allows copying content between different documents. For this reason, local versions of “Predefined Names” must not be produced.
2. New definitions must be inserted in a new row. Never change existing definitions, as they might be used in other documents.
3. This file does not need to be included in your book, but it must be in the fm sub-folder of your document.
4. You can sort the above table with FrameMaker only if the initial cross-reference in the right column has been properly inserted. Otherwise, the table may only be sorted by hand, as the cross-references to your document would get lost.



www.infineon.com