

# FUJITSU Component Touch Panels

## Feather Touch - Long Life 4-Wire series

Fujitsu Resistive Touch Panel Specification

### Features

- Superior quality 4-wire resistive touch panels
- Available in light input force types (min. 0.02N) or standard force types
- Light input force with dual input gesture supports PCAP comparable user experience
  - Pinch, Zoom, Rotate, Swipe or Flick action detection by the controller
- Excellent specification and high quality panels for a wide range of applications
- Pen/finger input support
- 80% transparency typical
- RoHS compliant



### ■ Feather Touch - Long Life 4-Wire Resistive Touch Panel Part Numbers

Size	Aspect Ratio	Part number	Transparent area (mm)	Glass thickness (mm)	Tail (Flex) length mm	Transparency %
22	wide	FID-1144-001-A22	479.76 x 303.1	1.8	120	80
19	4x3	FID-1143-001-A19	382.92 x 307.66	1.8	120	80
15	4x3	FID-1142-001-A15	311.0 x 234.2	1.8	120	80
15	4x3	FID-1141-001-A15	309.0 x 233.0	1.8	120	80
12.1	4x3	FID-1135-001-A12	251.0 x 189.5	1.1	75	80
10.4	4x3	FID-1134-001-A10	216.0 x 163.0	1.1	75	80
10.4	4x3	FID-1133-001-A10	216.6 x 164.6	1.1	75	80
10.1	wide	FID-1132-001-A10	229.0 x 131.5	1.1	75	80
10.1	wide	FID-1131-001-A10	223.4 x 141.5	1.1	75	80
8.4	4x3	FID-1125-001-A08	175.9 x 133.3	1.1	61	80
8.4	4x3	FID-1124-001-A08	176.0 x 133.5	1.1	61	80
7	wide	FID-1123-001-A07	162.4 x 98.6	1.1	61	80
7	wide	FID-1122-001-A07	159.4 x 97.44	1.1	61	80
5.7	4.3	FID-1121-001-A05	119.2 x 89.4	1.1	61	80

■ Notes: Full specifications are available - please contact your local Sales Representative or use the Contact Form to request

■ Controller Boards

Part Number	Type	Notes
NC01850-B070RS	4-wire, RS232	Discontinued - June 2021
NC01850-B010RS	4-wire, USB	Discontinued - June 2021
FID-1850-130	4-wire, USB, dual touch*	Discontinued - June 2021

\*: Compatible with Windows®10

■ Control IC


Part Number	RTP Type	Support I/F	Feature	Notes
NC41120-0036	4-wire	Asynchronous serial (RS232)	Single touch	Discontinued - June 2021
NC41120-0038	4-wire	I2C	Single, dual touch	-
NC41120-0051	4-wire	USB full-speed	Single touch	Discontinued - June 2021
FID-1860-009	4-wire	USB full-speed	Dual touch*	Discontinued - June 2021

\*: Compatible with Windows®10

■ Stylus Pen


Part Number	Description	Specification	Notes
N010-0557-T002	Miniature pen	Top: R0.8 polyacetal resin, load: approx: 0.33N Thickness: 5.4mm, length: 110mm, weight: approximately 3g	To be Discontinued
N010-0557-T011	Standard pen	Top: R0.8 polyacetal resin, load: approx: 0.33N Thickness: 8.0mm, length: 140mm, weight: approximately 10g, color: light gray	To be Discontinued

■ Dimension example

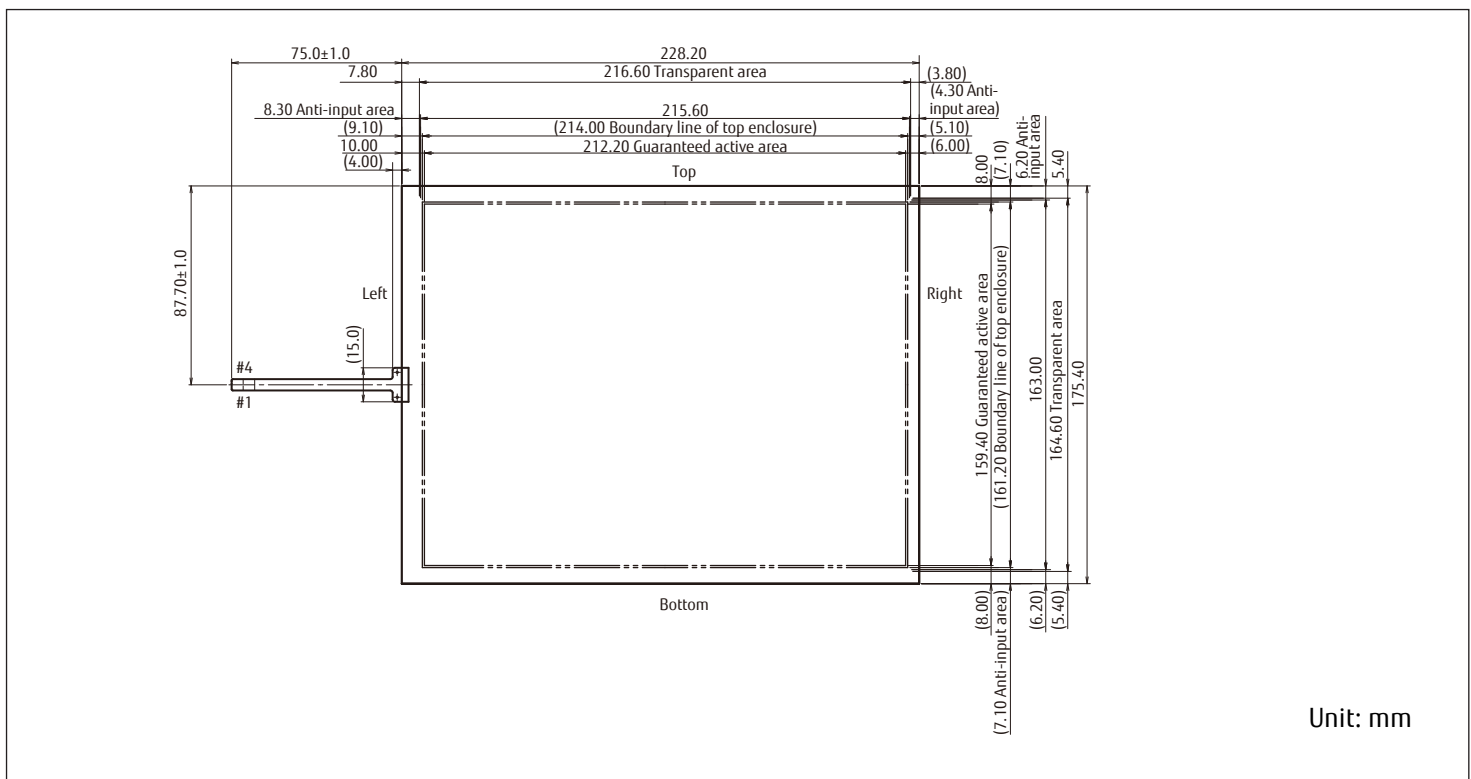

■ System description and block diagram

Fujitsu's touch panel in combination with a control IC chip or control board is used for transfer the co-ordinate data to the host system.

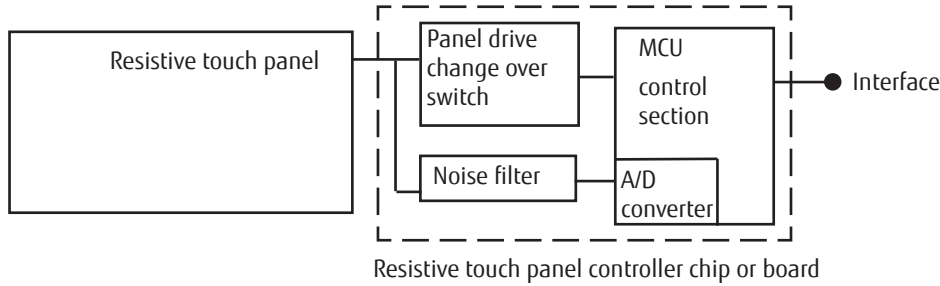

■ General notes

Touch panels are made of glass, so care must be taken in handling them. Do not stress, pile, bend, lift by the cable or put any stress on the film, for example moving by film face vacuum. In order to clean wring dry a cloth which has been emersed in a natural detergent. DO NOT use any organic solvent, acid or alkali solution. Watch the edge of the panel when cleaning, again for safety reasons.

■ Detailed specifications

Complete specification document is available upon request.

■ Electrical: Touch Panels

Rated voltage	DC 5V
Switch bounce (chattering)	20ms maximum
Insulation resistance	10MΩ minimum

■ Environmental: Touch Panels

Operating temperature	-5°C to 60°C
Storage temperature	-30°C to 70°C
Operating humidity *1	20% to 90%
Storage humidity *1	10% to 90% RH

\*v: Maximum wet bulb temperature of 38°C

Contact

**Japan**  
 FUJITSU COMPONENT LIMITED  
 Shinagawa Seaside Park Tower  
 12-4, Higashi-shinagawa 4-chome,  
 Tokyo 140 0002, Japan  
 Tel: (81-3) 3450-1682  
 Fax: (81-3) 3474-2385  
 Email: fcl-contact@cs.jp.fujitsu.com  
 Web: www.fujitsu.com/jp/group/fcl/en/

**Europe**  
 FUJITSU COMPONENTS EUROPE B.V.  
 Diamantlaan 25  
 2132 WV Hoofddorp  
 Netherlands  
 Tel: (31-23) 5560910  
 Fax: (31-23) 5560950  
 Email: info@fceu.fujitsu.com  
 Web: emea.fujitsu.com/components/

**China**  
 FUJITSU ELECTRONIC COMPONENTS  
 (SHANGHAI) CO., LTD.  
 Unit 4306, InterContinental Center  
 100 Yu Tong Road, Shanghai 200070, China  
 Tel: (86 21) 3253 0998 /Fax: (86 21) 3253 0997  
 Email: fcsh@cn.fujitsu.com  
 www.fujitsu.com/cn/products/devices/  
 components/

**Korea**  
 FUJITSU COMPONENTS KOREA, LTD.  
 Alpha Tower #403,  
 645 Sampyeong-dong,  
 Bundang-gu, Seongnam-si,  
 Gyeonggi-do, 13524 Korea  
 Tel: (82 31) 708-7108  
 Fax: (82 31) 709-7108  
 Email: fcal@sg.fujitsu.com  
 www.fujitsu.com/sg/products/  
 devices/components/

**North and South America**  
 FUJITSU COMPONENTS AMERICA, INC.  
 1230 E. Arques Ave., M/S 160  
 Sunnyvale, CA 94085 U.S.A.  
 Tel: (1-408) 745-4900  
 Fax: (1-408) 745-4970  
 Email: components@us.fujitsu.com  
 Web: http://us.fujitsu.com/components/

**Asia Pacific**  
 FUJITSU COMPONENTS ASIA, Ltd.  
 102E Pasir Panjang Road  
 #01-01 Citilink Warehouse Complex,  
 Singapore 118529  
 Tel: (65) 6375-8560 / Fax: (65) 6273-3021  
 Email: fcal@sg.fujitsu.com  
 www.fujitsu.com/sg/products/devices/  
 components/

**Hong Kong**  
 FUJITSU COMPONENTS HONG KONG Co., Ltd.  
 Room 06, 28/F, Greenfield Tower, Concordia  
 Plaza, No.1 Science Museum Road,  
 Tsim Sha Tsui East, Kowloon, Hong Kong  
 Tel: (852) 2881 8495 Fax: (852) 2894 9512  
 Email: fcal@sg.fujitsu.com  
 www.fujitsu.com/sg/products/devices/  
 components/

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Copyright ©2021 Fujitsu Components America, Inc. All rights reserved. Revised September 8, 2021.