


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 01005 NPO 27pF 16V (01R5N270F160CT)

1. Dimension

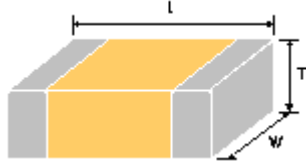

Size Inch (mm)	L (mm)	W (mm)	T (mm)
01R5 (0402)	0.40±0.02	0.20±0.02	0.20±0.02


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @16V, 120sec)

Item	Spec
Cap [pF]	27(±1%)
DF	≤ 0.11%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4991B+ENA5071C)

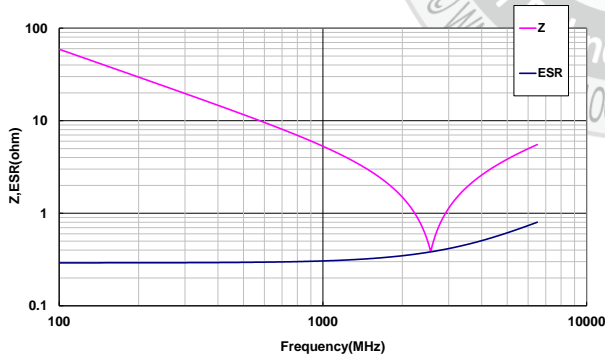

5. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

8V: 0%; 16V: 0%

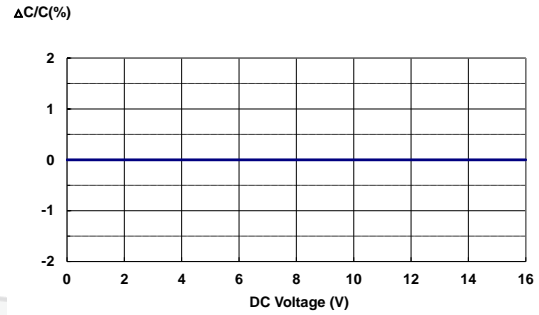

6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

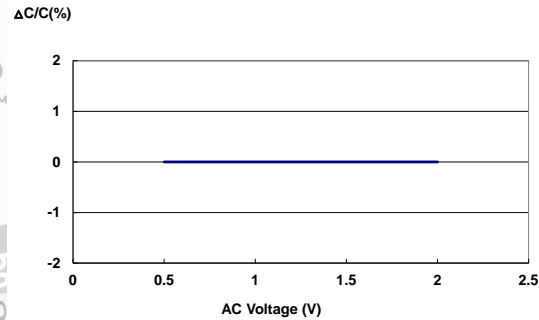

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

