


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0201 X7R 1nF 50V(0201B102K500CT)

#### 1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03


#### 2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [nF]	1 (±10%)
DF	≤ 3%
IR [G-ohm]	≥ 10


#### 3. Impedance/ESR-Frequency

(Equipment: 4287A)

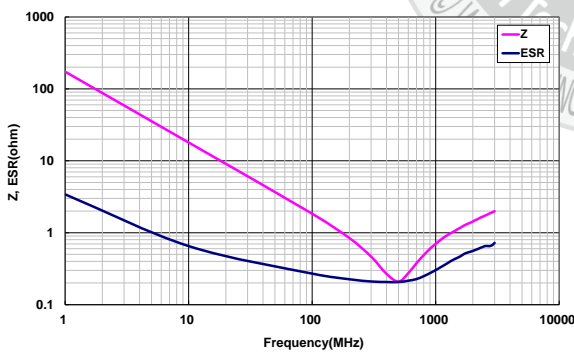

#### 4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

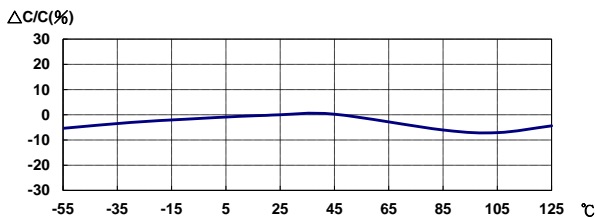


#### 5. Capacitance – DC Voltage Characteristics

(Equipment: 4980A+B1505A+N1259A)

(DC charge 60±5sec)

25V : -16.21% ; 50V : -54.62%

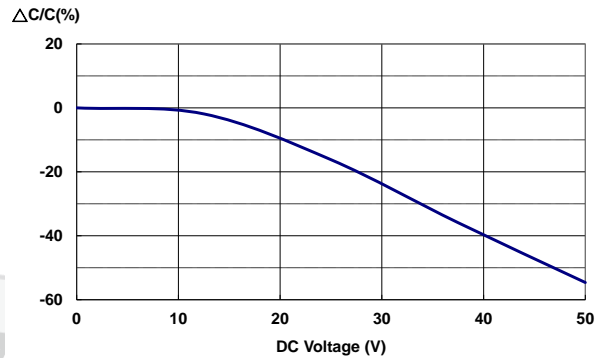

#### 6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

