

Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0201 X7R 3.9nF 6.3V(0201B392K6R3CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @6.3V, 120sec)

Item	Spec
Cap [nF]	3.3(±10%)
DF	≤3.5%
IR [G-ohm]	≥10

3. Impedance/ESR-Frequency


(Equipment: 4287A)

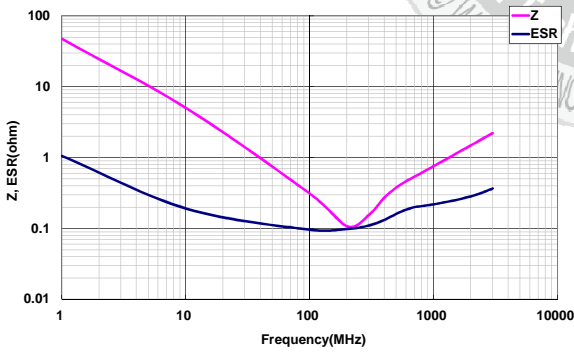

5. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

3.15V : -0.05% ; 6.3V : -4.48%

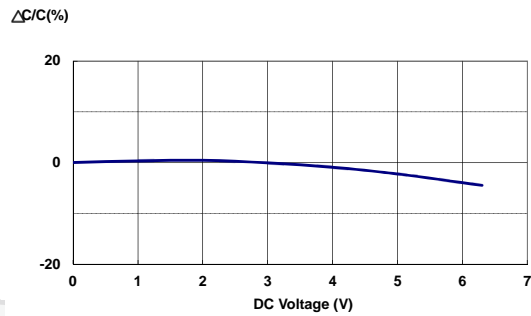


6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

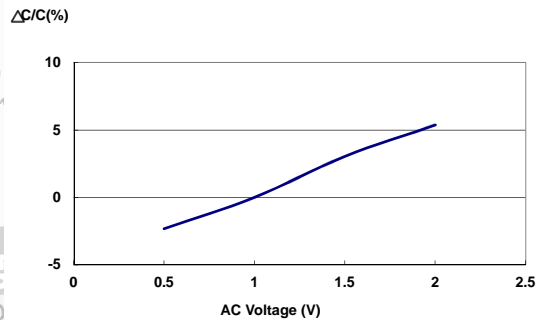

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

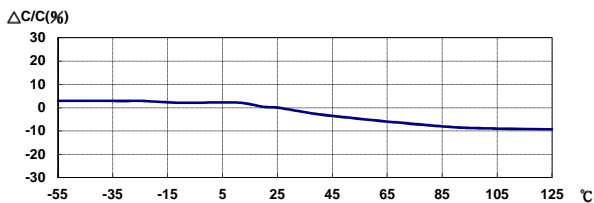

Last updated : 2018/06/04