


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0201 X7R 470pF 25V(0201B471J250CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 25V, 120sec)

Item	Spec
Cap [pF]	470(±5%)
DF	≤ 3.5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4287A)

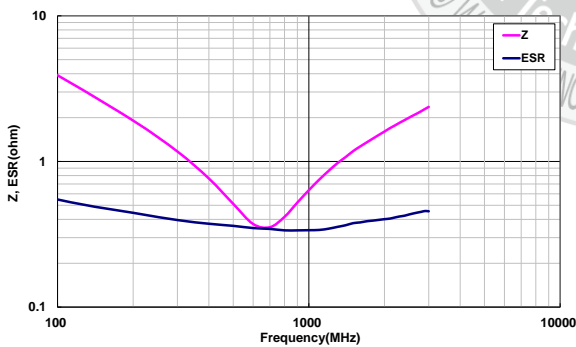

5. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

12.5V : -5.75% ; 25V : -18.94%

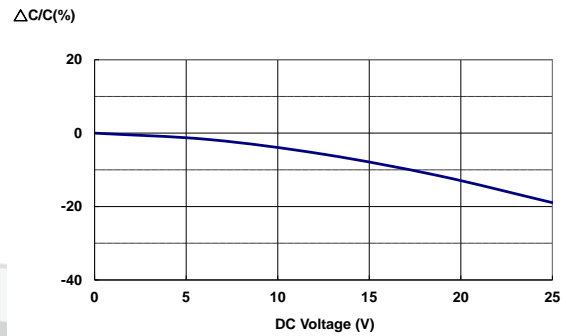


6. Capacitance – AC Voltage Characteristic

(Equipment: 4980A)

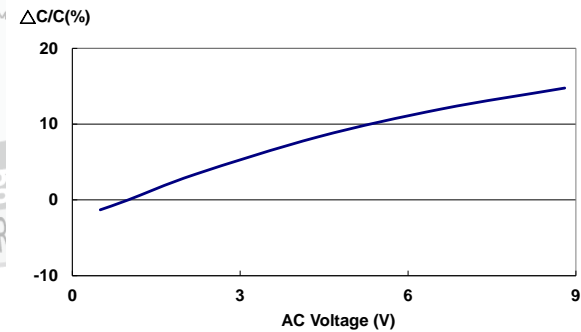

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

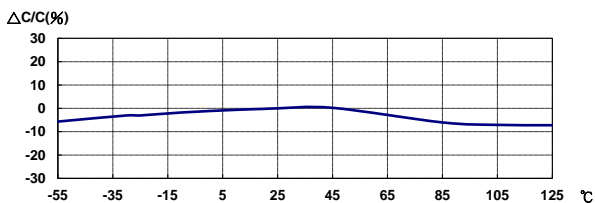

Last updated : 2019/08/05