

Isolated 1W Dual Output DC-DC Converters



FEATURES

- RoHS compliant
- Efficiency up to 80%
- Power density up to 0.85W/cm³
- Dual output from a single input rail
- UL 94V-0 package material
- No heatsink required
- Footprint from 1.17cm²
- Industry standard pinout
- Power sharing on output
- 1kVDC isolation
- 24V & 48V inputs
- 5V, 9V, 12V & 15V outputs
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required

			DT	
ш	- ~	I:KI	ווטו	ON
_		UIII		

The NMA series of B converters are the standard buliding blocks for on-board distributed power systems. They are ideally suited for providing dual rail supplies on primarily digital boards with the added benefit of galvanic isolation to reduce switching noise. All of the rated power may be drawn from a single pin provided the total load does not exceed 1 watt.

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF ¹	Package Style	Recommende Alternatives
	V	V	mA	%	pF	kHrs		
				NRND				
NMA2405SC	24	±5	±100	70	39	194		MEA1D2405S
NMA2412SC	24	±12	±42	80	65	134	SIP	MEA1D2412S
NMA2415SC	24	±15	±33	80	95	101		MEA1D2415S
				To be discontinue	d			
NMA2409SC	24	±9	±55	77	85	129	SIP	MEA1D2409S
			Di	scontinu	ed			
NMA2405DC	24	±5	±100	70	39	194		MEA1D2405D
NMA2409DC	24	±9	±55	77	85	129		MEA1D2409D
NMA2412DC	24	±12	±42	80	65	134		MEA1D2412D
NMA2415DC	24	±15	±33	80	95	101	DIP	MEA1D2415D
NMA4805DC	48	±5	±100	70	26	206		MEA1D4805D
NMA4809DC	48	±9	±55	80	38	174		MEA1D4809D
NMA4812DC	48	±12	±42	80	52	139		MEA1D4812D
NMA4815DC	48	±15	±33	80	56	104		MEA1D4815D
NMA4805SC	48	±5	±100	70	26	206		MEA1D4805S
NMA4809SC	48	±9	±55	80	38	174	SIP	MEA1D4809S
NMA4812SC	48	±12	±42	80	52	139	SIF	MEA1D4812S
NMA4815SC	48	±15	±33	80	56	104		MEA1D4815S

INPUT CHARACTERISTICS							
Parameter	Conditions	Min.	Тур.	Max.	Units		
Voltage range	Continuous operation, 24V input types	21.6	24	26.4	V		
vullaye ranye	Continuous operation, 48V input types	43.2	48	52.8	V		

capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the

OUTPUT CHARACTERISTICS								
Parameter	Conditions	Min.	Тур.	Max.	Units			
Rated Power ²	T _A =0°C to 70°C			1	W			
Voltage Set Point Accuracy	See tolerance envelope							
Line regulation	High V _{IN} to low V _{IN}			1.2	%/%			
Load Regulation	10% load to rated load, 5V output types			15	%			
Luau negulation	10% load to rated load, all other output types			10				
Ripple and Noise	BW=DC to 20MHz, all input types			150	mV p-p			
ISOLATION CHARACTERI	ISOLATION CHARACTERISTICS							
Parameter	Conditions	Min.	Тур.	Max.	Units			
Isolation test voltage	Flash tested for 1 second	1000			VDC			
Resistance	Viso= 500VDC	10			GΩ			





1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

additional external capacitance for reliable start up.

2. See derating graph.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.



Isolated 1W Dual Output DC-DC Converters

GENERAL CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Switching frequency	All input types		100		kHz	

TEMPERATURE CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Specification	All output types	0		70	°C	
Storage		-55		150	U	
Cooling	Free air convection					

ABSOLUTE MAXIMUM RATINGS			
Lead temperature 1.5mm from case for 10 seconds	300°C		
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760- Section 6.1.3. Please refer to <u>application notes</u> for further information.		
Internal power dissipation	450mW		
Input voltage V _{IN} , NMA24 types	28V		
Input voltage V _{IN} , NMA48 types	54V		



Isolated 1W Dual Output DC-DC Converters

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMA series of DC-DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMA series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMA series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enamelled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognised parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

ROHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. Please refer to application notes for further information. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs




Isolated 1W Dual Output DC-DC Converters

APPLICATION NOTES

Minimum load


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

TOLERANCE ENVELOPE

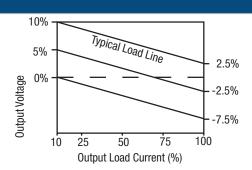


The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

TEMPERATURE DERATING GRAPH






Isolated 1W Dual Output DC-DC Converters

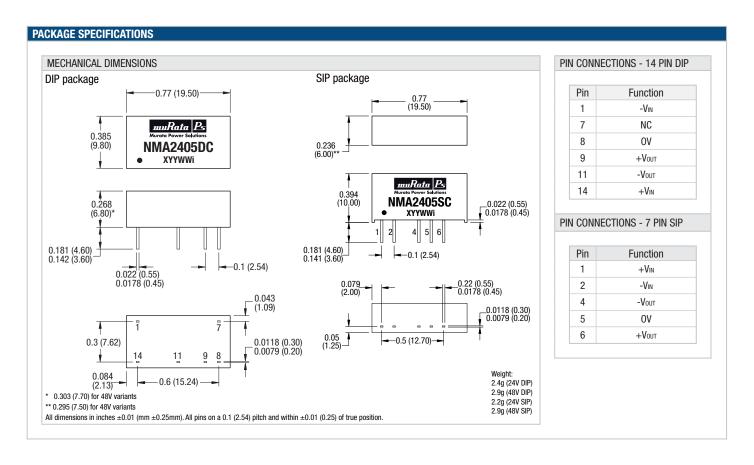

Isolated 1W Dual Output DC-DC Converters

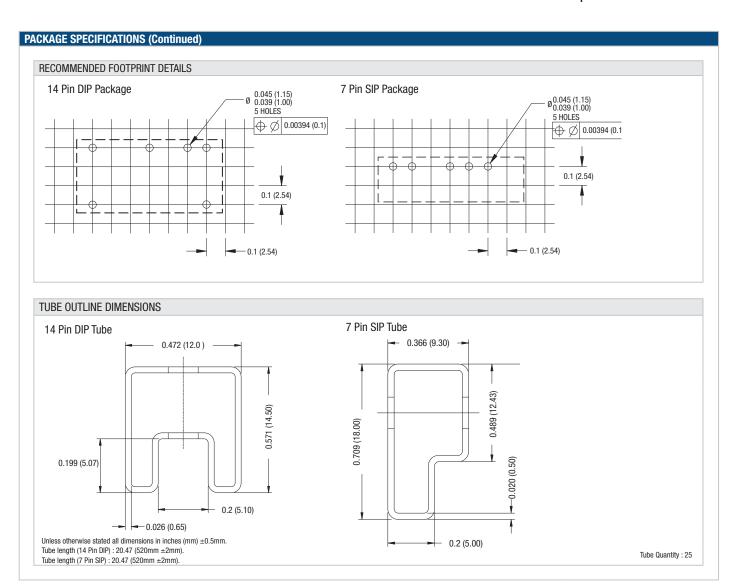



Isolated 1W Dual Output DC-DC Converters

DISCLAIMER

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from Murata is strictly required. Any use of Murata standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from Murata shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment (automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Murata makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does Murata assume any liability whatsoever arising out of unauthorised use of any Murata product for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of Murata product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold Murata, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any Murata products in any safety-critical and/or life-critical applications.

Remark: Murata in this section refers to Murata Manufacturing Company and its affiliated companies worldwide including, but not limited to, Murata Power Solutions.

This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy:

Refer to: https://www.murata.com/en-eu/products/power/requirements

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2021 Murata Power Solutions (Milton Keynes) Ltd.