


**ZTX450  
ZTX451**

**NPN SILICON PLANAR  
MEDIUM POWER TRANSISTORS**


ISSUE 2 - MARCH 1994

**ZTX450  
ZTX451**


**TYPICAL CHARACTERISTICS**

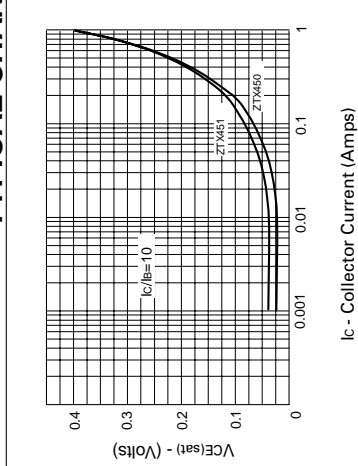


**VCE(sat) v IC**  
IC - Collector Current (Amps)

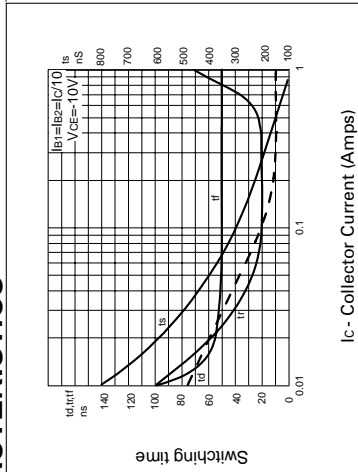


**Typical Switching Speeds**  
IC - Collector Current (Amps)

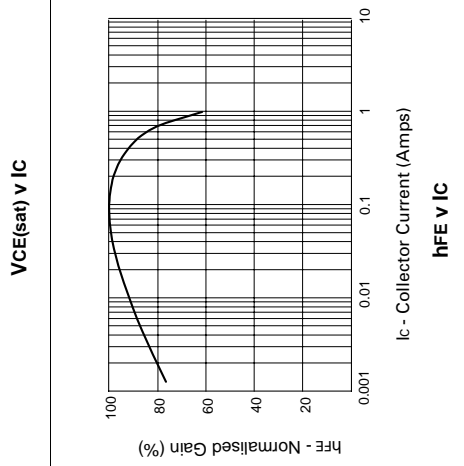


**hFE v IC**  
IC - Collector Current (Amps)

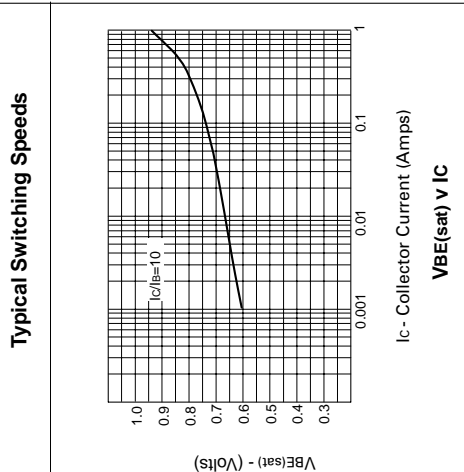

**VBE(sat) v IC**  
IC - Collector Current (Amps)

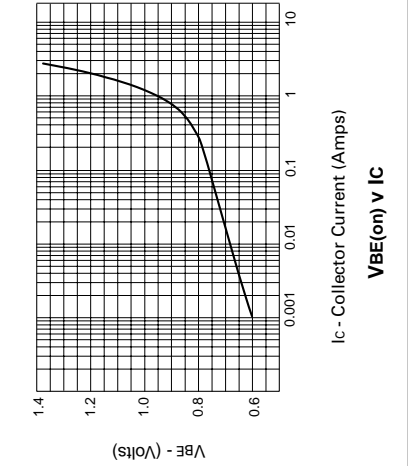


**VBE(on) v IC**  
IC - Collector Current (Amps)

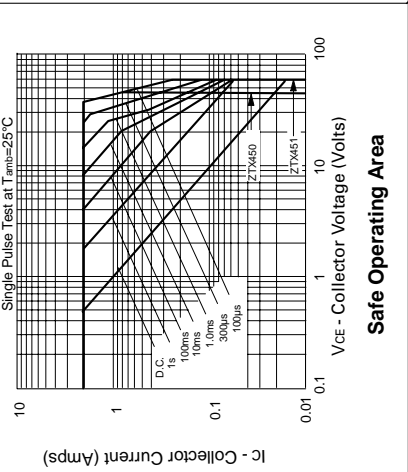

**Safe Operating Area**  
VCE - Collector Voltage (Volts)

**FEATURES**

- \* 60 Volt  $V_{CEO}$
- \* 1 Amp continuous current
- \*  $P_{tot} = 1$  Watt



**E-Line  
TO92 Compatible**

**ABSOLUTE MAXIMUM RATINGS.**

PARAMETER	SYMBOL	ZTX450	ZTX451	UNIT
Collector-Base Voltage	$V_{CBO}$	60	80	V
Collector-Emitter Voltage	$V_{CEO}$	45	60	V
Emitter-Base Voltage	$V_{EBO}$	5	5	V
Peak Pulse Current	$I_{CM}$	2	2	A
Continuous Collector Current	$I_C$	1	1	A
Power Dissipation at $T_{amb}=25^\circ\text{C}$	$P_{tot}$	1	1	W
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 to +200		$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS (at  $T_{amb} = 25^\circ\text{C}$ ).**

PARAMETER	SYMBOL	ZTX450		ZTX451		CONDITIONS.
		MIN.	MAX.	MIN.	MAX.	
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	60		80		$I_C = 100\mu\text{A}$
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	45		60		$I_C = 10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5		5		$I_E = 100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}$		0.1		0.1	$V_{CB} = 45\text{V}$ $V_{CB} = 60\text{V}$
Emitter Cut-Off Current	$I_{EBO}$		0.1		0.1	$V_{EB} = 4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	0.25		0.35		$I_C = 150\text{mA}$ , $I_B = 15\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	1.1		1.1		$I_C = 150\text{mA}$ , $I_B = 15\text{mA}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	100 15	300	50 10	150	$I_C = 150\text{mA}$ , $V_{CE} = 10\text{V}$ $I_C = 1\text{A}$ , $V_{CE} = 10\text{V}^*$
Transition Frequency	$f_T$	150		150		$I_C = 50\text{mA}$ , $V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	$C_{obo}$	15		15		$V_{CB} = 10\text{V}$ , $f = 1\text{MHz}$







**ZTX450  
ZTX451**

**NPN SILICON PLANAR  
MEDIUM POWER TRANSISTORS**

ISSUE 2 - MARCH 1994


**ZTX450  
ZTX451**

**TYPICAL CHARACTERISTICS**

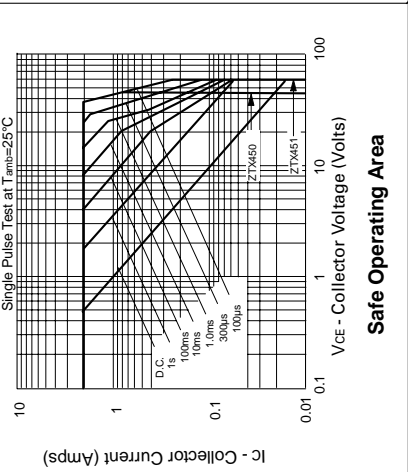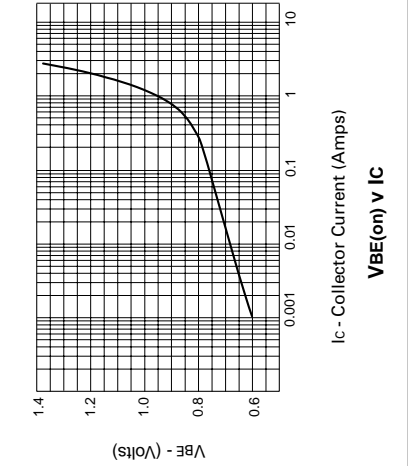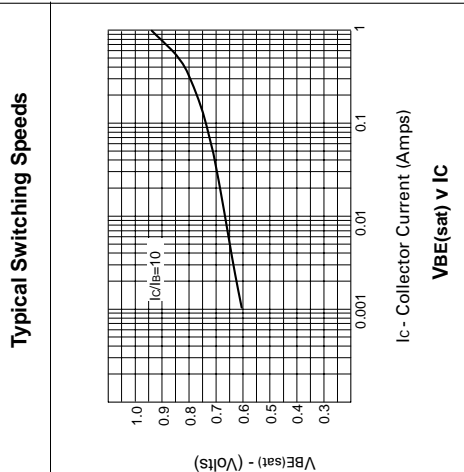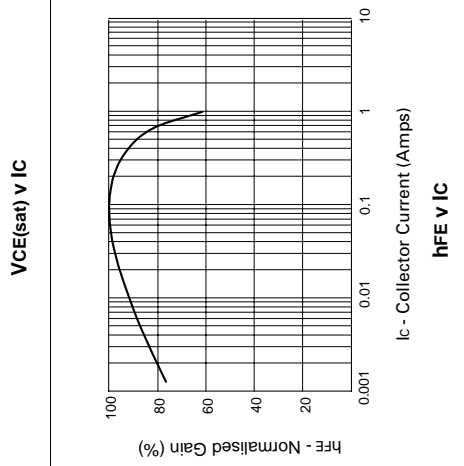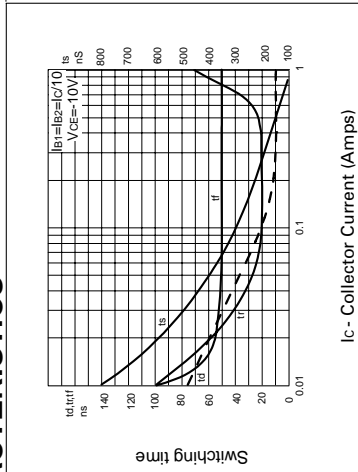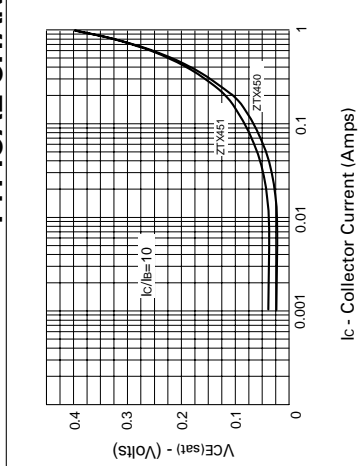

**FEATURES**

- \* 60 Volt  $V_{CE0}$
- \* 1 Amp continuous current
- \*  $P_{tot} = 1$  Watt



**E-Line  
TO92 Compatible**

**ABSOLUTE MAXIMUM RATINGS.**

PARAMETER	SYMBOL	ZTX450	ZTX451	UNIT
Collector-Base Voltage	$V_{CBO}$	60	80	V
Collector-Emitter Voltage	$V_{CEO}$	45	60	V
Emitter-Base Voltage	$V_{EBO}$	5	5	V
Peak Pulse Current	$I_{CM}$	2	2	A
Continuous Collector Current	$I_C$	1	1	A
Power Dissipation at $T_{amb}=25^\circ\text{C}$	$P_{tot}$	1	1	W
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 to +200		$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS (at  $T_{amb} = 25^\circ\text{C}$ ).**

PARAMETER	SYMBOL	ZTX450		ZTX451		CONDITIONS.
		MIN.	MAX.	MIN.	MAX.	
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	60		80		$I_C = 100\mu\text{A}$
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	45		60		$I_C = 10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5		5		$I_E = 100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}$		0.1		0.1	$V_{CB} = 45\text{V}$ $V_{CB} = 60\text{V}$
Emitter Cut-Off Current	$I_{EBO}$		0.1		0.1	$V_{EB} = 4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	0.25		0.35		$I_C = 150\text{mA}$ , $I_B = 15\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	1.1		1.1		$I_C = 150\text{mA}$ , $I_B = 15\text{mA}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	100 15	300	50 10	150	$I_C = 150\text{mA}$ , $V_{CE} = 10\text{V}$ $I_C = 1\text{A}$ , $V_{CE} = 10\text{V}^*$
Transition Frequency	$f_T$	150		150		$I_C = 50\text{mA}$ , $V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	$C_{obo}$	15		15		$V_{CB} = 10\text{V}$ , $f = 1\text{MHz}$