


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X7R 0.1uF 6.3V(0402B104K6R3CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @6.3V, 120sec)

Item	Spec
Cap [uF]	0.1(±10%)
DF	≤ 10%
IR [G-ohm]	≥ 1


3. Impedance/ESR-Frequency

(Equipment: 4990A)

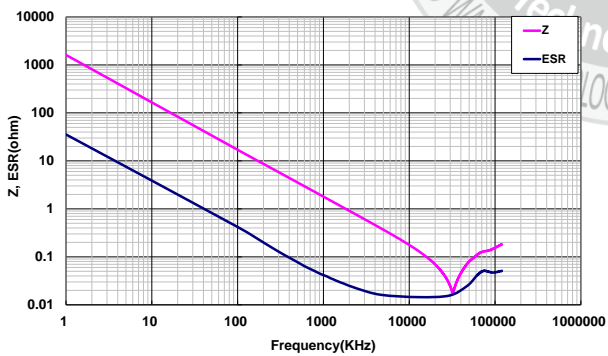

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

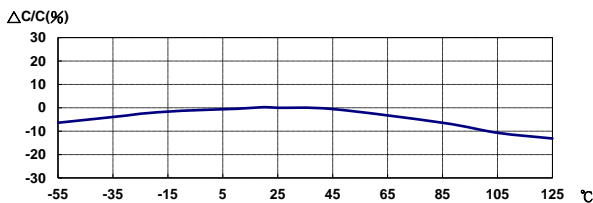

5. Temperature Rise – Ripple Current


(Equipment: 11810)

Over the measure limit.

6. Capacitance – DC Voltage Characteristics

(Equipment: 4980A; DC charge 60±5sec)

3.15V : 0.47% ; 6.3V : -10.37%

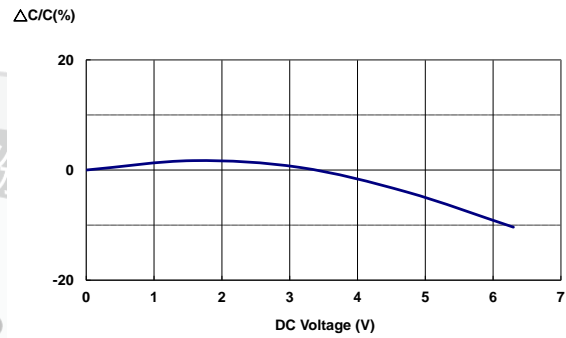

7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

