

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0402 X7R 22nF 50V (0402B223M500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [nF]	22(±20%)
DF	≤ 10%
IR [G-ohm]	≥ 4.55


3. Impedance/ESR-Frequency

(Equipment: 4990A)

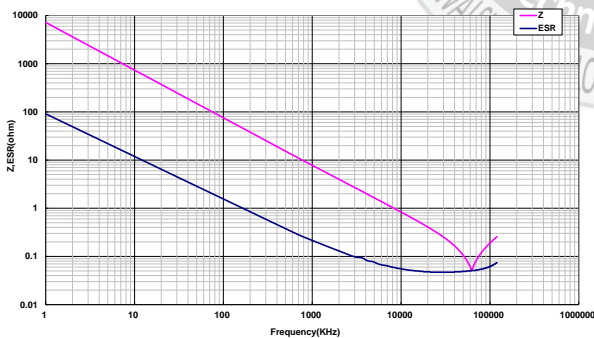

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

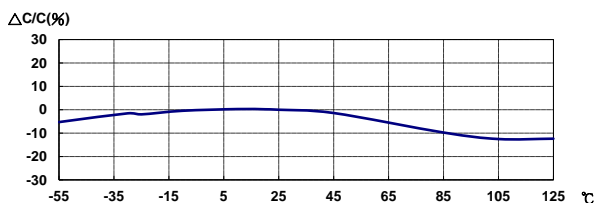


5. Capacitance – DC Voltage Characteristics

(Equipment: E4980A+N1259A+B1505A)

(DC charge 60±5sec)

25V : -39.14% ; 50V : -73.89%

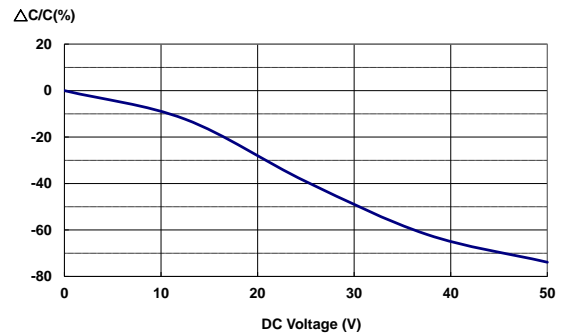

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

