

Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X7R 330pF 10V(0402B331K100CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @10V, 120sec)

Item	Spec
Cap [pF]	330(±10%)
DF	≤ 5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4287A)

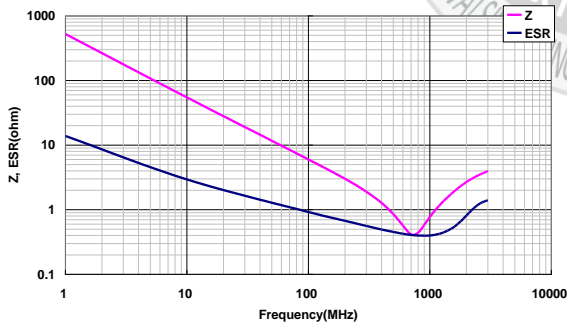

5. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

5V : 0.30% ; 10V : 0.00%

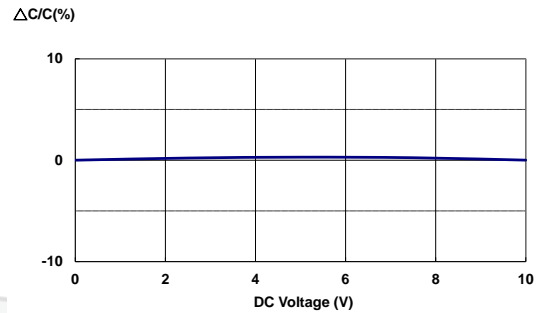

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

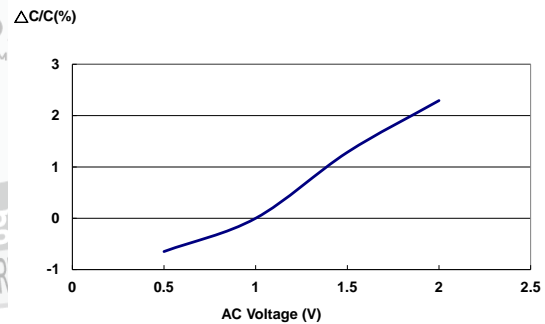

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

