


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X7R 3.3nF 25V(0402B332J250CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 25V, 120sec)

Item	Spec
Cap [nF]	3.3(±5%)
DF	≤ 3.5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4991B)

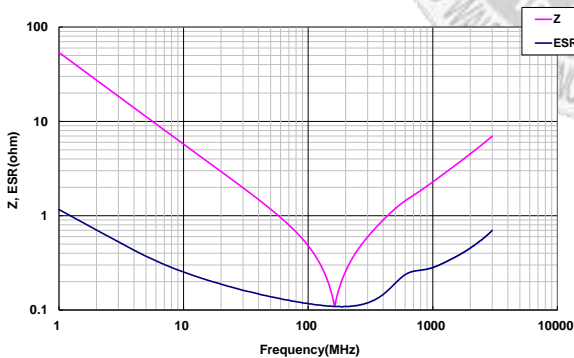

5. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

12.5V : -3.83% ; 25V : -14.34%

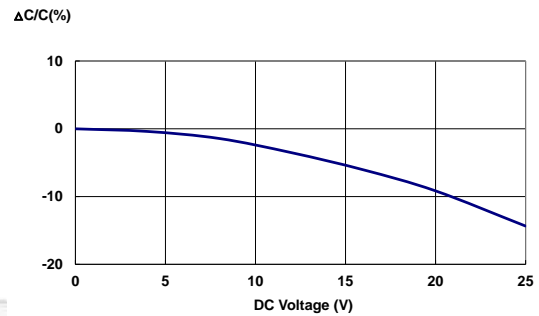


6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

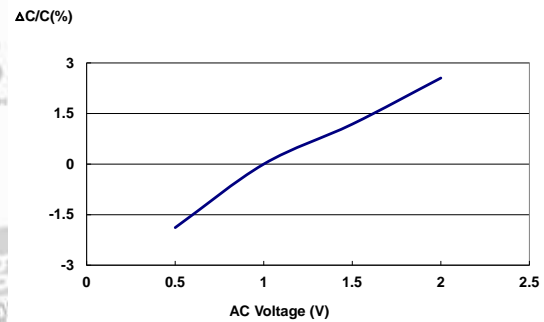

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

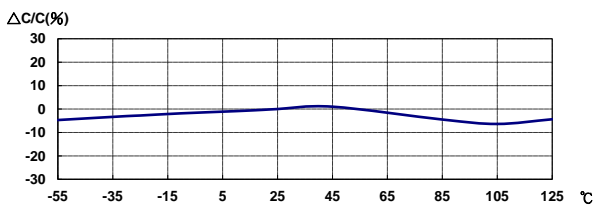

Last updated : 2020/09/30