


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X7R 47nF 16V(0402B473M160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 16V, 120sec)

Item	Spec
Cap [nF]	47(±20%)
DF	≤ 5%
IR [G-ohm]	≥ 10


3. Impedance/ESR-Frequency

(Equipment: 4990A)

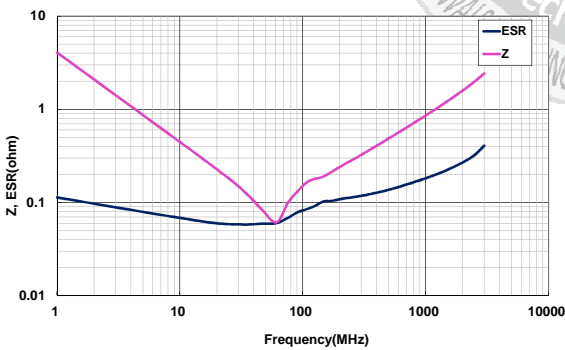

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

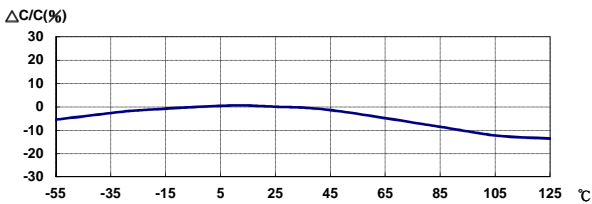

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

8V : -10.34% ; 16V : -40.53%

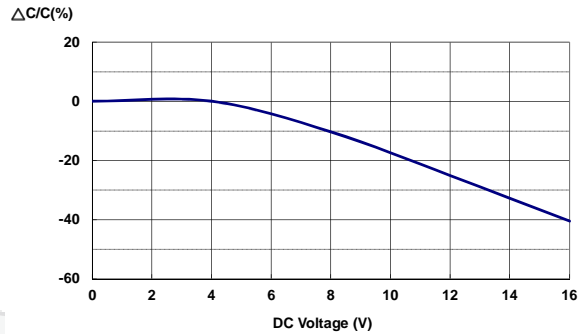

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

