

40 V, 0.2 A low VF MEGA Schottky barrier rectifier

10 March 2017

**Product data sheet** 

#### 1. General description

Planar Maximum Efficiency General Application (MEGA) Schottky barrier rectifier with an integrated guard ring for stress protection in a DSN0603-2 (SOD962-2) leadless ultra small Chip-Scale Package (CSP).

### 2. Features and benefits

- Average forward current I<sub>F(AV)</sub> ≤ 0.2 A
- Reverse voltage V<sub>R</sub> ≤ 40 V
- Low forward voltage typ. V<sub>F</sub> = 315 mV
- Low reverse current typ.  $I_R = 0.24 \ \mu A$
- Package height typ. 0.3 mm

#### 3. Applications

- Low voltage rectification
- High efficiency DC-to-DC conversion
- Switch mode power supply
- Ultra high-speed switching
- LED backlight for mobile application

### 4. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
l <sub>F</sub>	forward current	T <sub>sp</sub> ≤ 145 °C; δ = 1	-	-	0.28	А
V <sub>R</sub>	reverse voltage	T <sub>j</sub> = 25 °C	-	-	40	V
V <sub>F</sub>	forward voltage	$I_{F}$ = 200 mA; $t_{p}$ $\leq~$ 300 $\mu s;$ $\delta \leq~0.02~$ ; $T_{j}$ = 25 $^{\circ}C$	-	525	600	mV
I <sub>R</sub>	reverse current	$V_{R}$ = 40 V; T <sub>j</sub> = 25 °C; pulsed	-	1.2	6.5	μA



40 V, 0.2 A low VF MEGA Schottky barrier rectifier

#### 5. Pinning information

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	К	cathode[1]		1 🛃 2
2	А	anode		sym001
			Transparent top view	
			DSN0603-2 (SOD962-2)	

[1] The marking bar indicates the cathode.

# 6. Ordering information

Table 3. Ordering information						
Type number	Package					
	Name	Description	Version			
PMEG4002ESF	DSN0603-2	Leadless ultra small package; 2 terminals; body 0.6 x 0.3 x 0.3 mm	SOD962-2			

#### 7. Marking

Table 4. Marking codes	
Type number	Marking code
PMEG4002ESF	Μ

# 8. Limiting values

#### Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>R</sub>	reverse voltage	T <sub>j</sub> = 25 °C		-	40	V
I <sub>F</sub>	forward current	T <sub>sp</sub> ≤ 145 °C; δ = 1		-	0.28	А
I <sub>F(AV)</sub>	average forward current	$\delta$ = 0.5 $~;$ f = 20 kHz; $T_{sp} \leq ~$ 147 °C; square wave		-	0.2	A
		$\delta$ = 0.5 ; f = 20 kHz; T <sub>amb</sub> ≤ 140 °C; square wave	[1]	-	0.2	A
I <sub>FRM</sub>	repetitive peak forward current	$t_p \le 1 \text{ ms}; \delta \le 0.25$		-	1.2	A
I <sub>FSM</sub>	non-repetitive peak forward current	$t_p$ = 8 ms; $T_{j(init)}$ = 25 °C; square wave		-	3.5	A
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C	[2]	-	405	mW
			[3]	-	660	mW

Downloaded from Arrow.com.

**Product data sheet** 

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

Symbol	Parameter	Conditions		Min	Max	Unit
			[1]	-	1200	mW
Tj	junction temperature			-	150	°C
T <sub>amb</sub>	ambient temperature			-55	150	°C
T <sub>stg</sub>	storage temperature			-65	150	°C

[1] Device mounted on a ceramic Printed-Circuit Board (PCB), Al<sub>2</sub>O<sub>3</sub>, standard footprint.

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[3] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for anode and cathode 1 cm<sup>2</sup> each.

#### 9. Thermal characteristics

#### **Table 6. Thermal characteristics**

Symbol	Parameter	Conditions		Min	Тур	Мах	Unit
R <sub>th(j-a)</sub>	thermal resistance	[1] [3	[1] [2]	-	-	310	K/W
	from junction to ambient		[1] [3]	-	-	190	K/W
			[1] [4]	-	-	105	K/W
R <sub>th(j-sp)</sub>	thermal resistance from junction to solder point		[5]	-	-	40	K/W

[1] For Schottky barrier diodes thermal runaway has to be considered, as in some applications the reverse power losses P<sub>R</sub> are a significant part of the total power losses.

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[3] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for anode and cathode 1 cm<sup>2</sup> each.

[4] Device mounted on a ceramic PCB, Al<sub>2</sub>O<sub>3</sub>, standard footprint.

[5] Soldering point of anode tab.

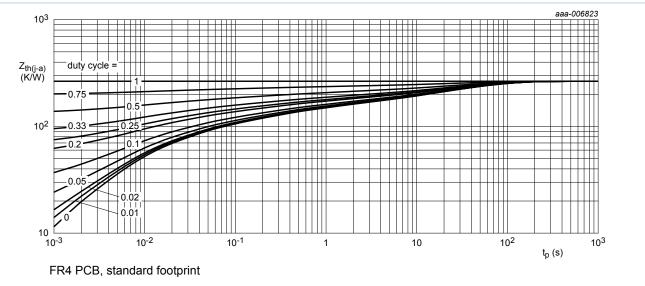



Fig. 1. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

PMEG4002ESF

#### Nexperia

# PMEG4002ESF

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

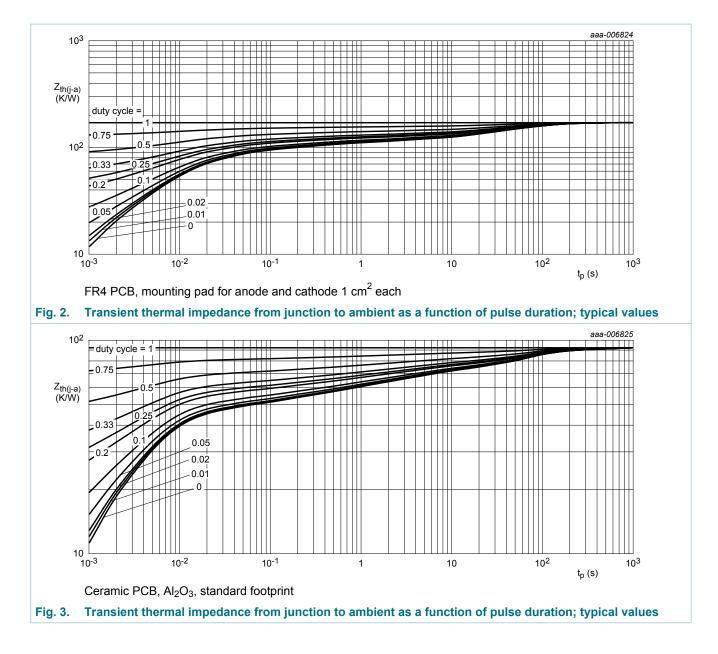

#### 10. Characteristics

#### **Table 7. Characteristics** Symbol Conditions **Parameter** Min Тур Max Unit reverse reverse $I_R = 100 \ \mu\text{A}; t_p = 300 \ \mu\text{s}; \delta = 0.02$ ; 40 V V<sub>(BR)R</sub> \_ \_ T<sub>i</sub> = 25 °Ċ breakdown voltage $V_{F}$ forward voltage $I_F = 0.1 \text{ mA}; t_p \le 300 \text{ }\mu\text{s}; \delta \le 0.02 ;$ 185 255 mV -T<sub>i</sub> = 25 °C $I_F = 1 \text{ mA}; t_p \le 300 \text{ }\mu\text{s}; \delta \le 0.02 ;$ 250 320 mV \_ T<sub>i</sub> = 25 °C $I_F$ = 10 mA; $t_p \leq$ 300 $\mu s; \delta \leq$ 0.02 ; 315 390 mV \_ T<sub>i</sub> = 25 °C

#### PMEG4002ESF


Downloaded from Arrow.com.

© Nexperia B.V. 2017. All rights reserved

#### Nexperia

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier


Symbol	Parameter	Conditions	Min	Тур	Мах	Unit
		$I_{F}$ = 100 mA; $t_{p}$ $\leq~$ 300 $\mu s;$ $\delta \leq~$ 0.02 $;$ $T_{j}$ = 25 $^{\circ}C$	-	440	510	mV
		$I_{F}$ = 200 mA; $t_{p}$ $\leq~$ 300 $\mu$ s; $\delta$ $\leq~$ 0.02 $\ ;$ $T_{j}$ = 25 $^{\circ}\text{C}$	-	525	600	mV
I <sub>R</sub>	reverse current	$V_{R}$ = 10 V; T <sub>j</sub> = 25 °C; pulsed	-	0.24	2.5	μA
		$V_{R}$ = 40 V; T <sub>j</sub> = 25 °C; pulsed	-	1.2	6.5	μA
C <sub>d</sub>	diode capacitance	V <sub>R</sub> = 1 V; f = 1 MHz; T <sub>j</sub> = 25 °C	-	17	-	pF
		V <sub>R</sub> = 10 V; f = 1 MHz; T <sub>j</sub> = 25 °C	-	7	-	pF
t <sub>rr</sub>	reverse recovery time	I <sub>F</sub> = 500 mA; I <sub>R</sub> = 500 mA; I <sub>R(meas)</sub> = 100 mA; T <sub>j</sub> = 25 °C	-	1.28	-	ns

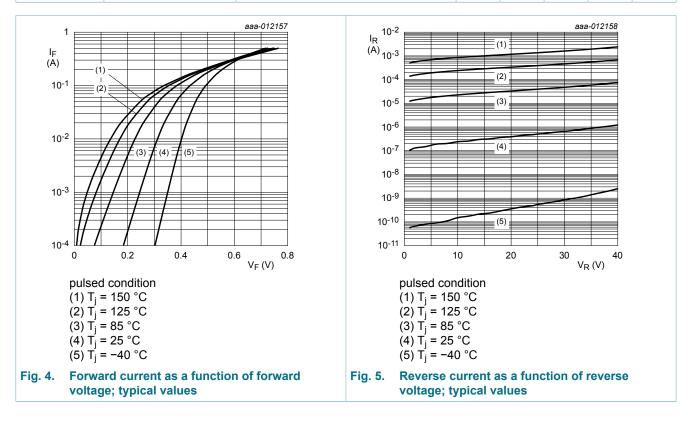


#### Nexperia

## PMEG4002ESF

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

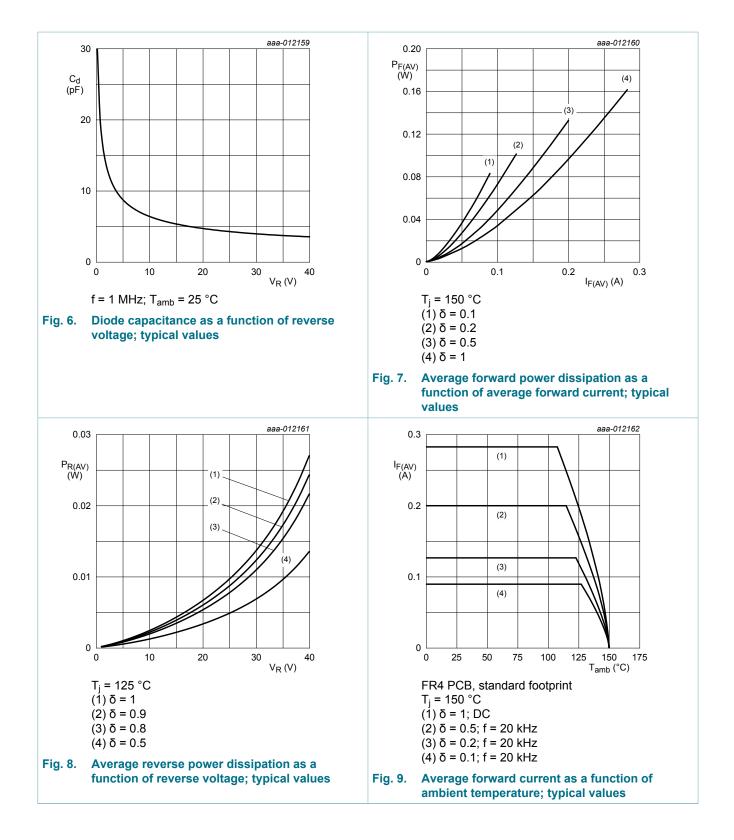


#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

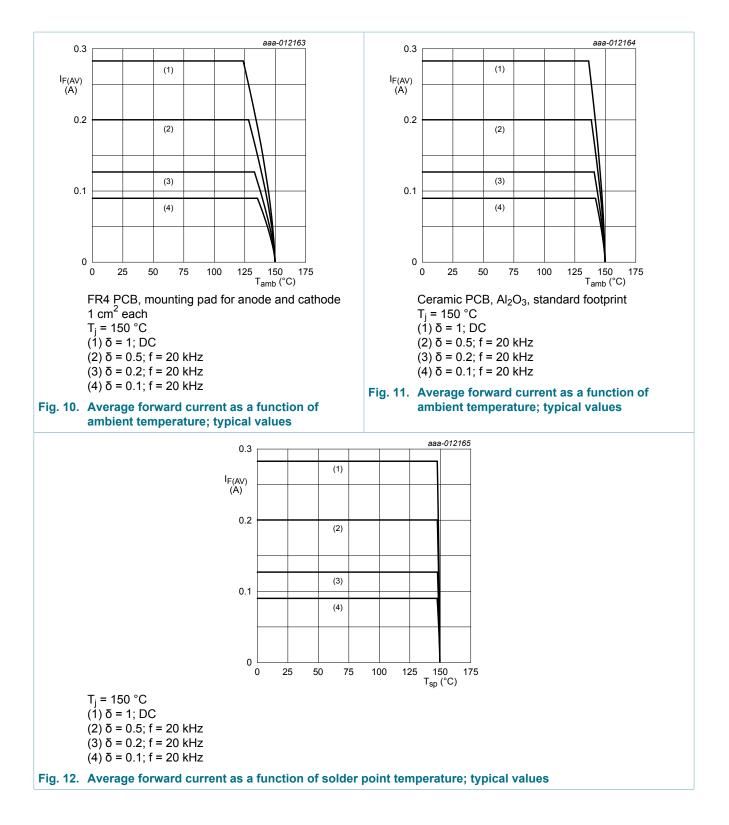

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

### 11. Test information

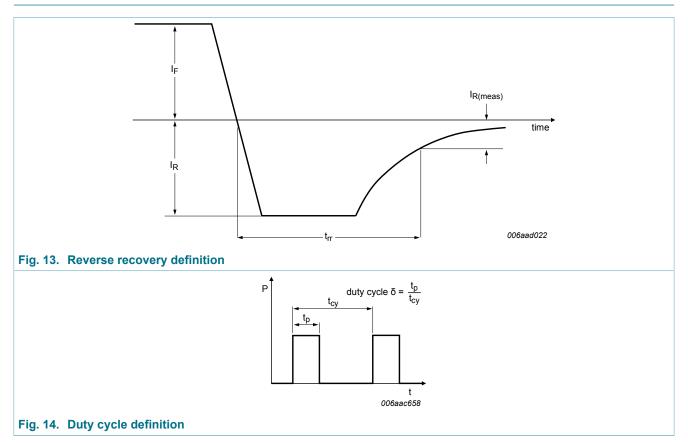

The current ratings for the typical waveforms are calculated according to the equations:  $I_{F(AV)} = I_M \times \delta$  with  $I_M$  defined as peak current,  $I_{RMS} = I_{F(AV)}$  at DC, and  $I_{RMS} = I_M \times \sqrt{\delta}$  with  $I_{RMS}$  defined as RMS current.

Downloaded from Arrow.com.

**Product data sheet** 

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

#### 12. Package outline

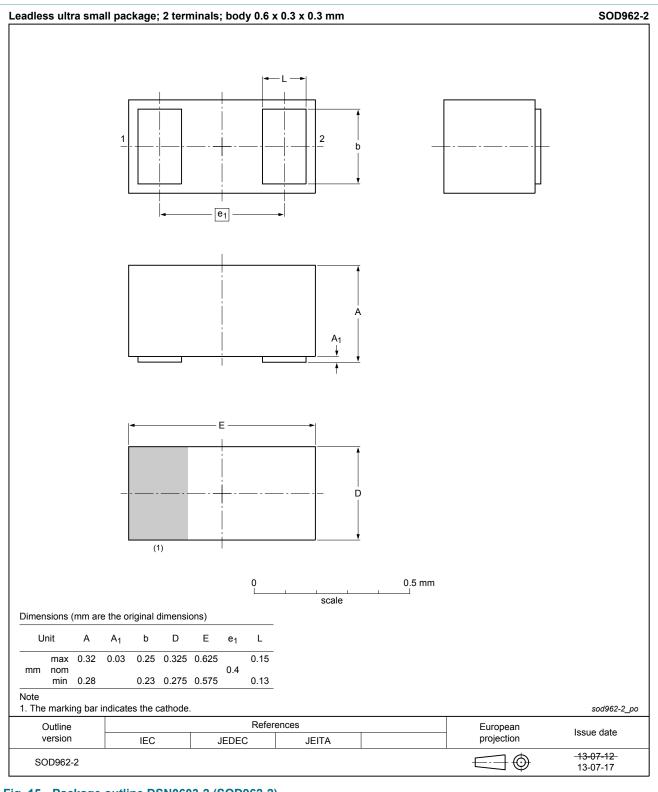


Fig. 15. Package outline DSN0603-2 (SOD962-2)

PMEG4002ESF

Downloaded from Arrow.com.

**Product data sheet** 

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

### 13. Soldering

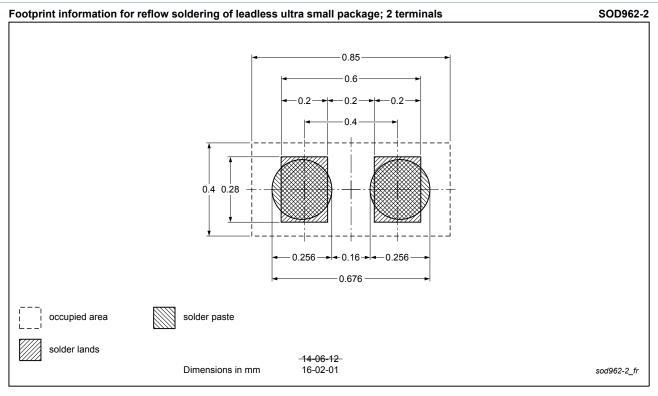


Fig. 16. Reflow soldering footprint for DSN0603-2 (SOD962-2)

#### 14. Revision history

Table 8. Revision history				
Data sheet ID	Release date	Data sheet status	Change notice	Supersedes
PMEG4002ESF_S500 v.1	20150505	Product data sheet	-	-

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

### 15. Legal information

#### **Data sheet status**

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

 Please consult the most recently issued document before initiating or completing a design.

- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <u>http://www.nexperia.com</u>.

#### Definitions

**Preview** — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia' aggregate and cumulative liability towards customer

for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <u>http://www.nexperia.com/profile/terms</u>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia' warranty of the product for such automotive applications, use and specifications, and (b) whenever

PMEG4002ESF

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

customer uses the product for automotive applications beyond Nexperia' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia' standard warranty and Nexperia' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

PMEG4002ESF

#### 40 V, 0.2 A low VF MEGA Schottky barrier rectifier

### 16. Contents

1.	General description	1
2.	Features and benefits	1
3.	Applications	1
4.	Quick reference data	1
5.	Pinning information	2
6.	Ordering information	2
7.	Marking	2
8.	Limiting values	2
9.	Thermal characteristics	3
10.	. Characteristics	4
11.	. Test information	8
12.	. Package outline	9
13.	. Soldering	10
14.	. Revision history	10
15.	. Legal information	11

© Nexperia B.V. 2017. All rights reserved

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 10 March 2017

PMEG4002ESF