

# **MVAD160 Series**

# 160W 2" X 4" AC-DC Power Supply Converter

#### **DESCRIPTION**

The MVAD160 series switching power supplies utilize advanced component and circuit technologies to deliver high efficiency. Designed for Medical, Telecom, and Industrial applications to satisfy 1U height design considerations, the MVAD160 Series measures only 2.0" x 4.0" x 1.5". All models offer universal AC input and compliance to worldwide safety and EMC standards.

ORDERING GUIDE							
Model Number	Natural Convection Cooling (@ta = 50°C)	Conduction Cooling (@ta = 85°C)	Forced Air Cooling (@350LFM /ta=50°C)	Main Output (V1)	Aux Output (V2)		
MVAD160-125		110W		12V			
MVAD160-245				24V	5V		
MVAD160-485	110W		160W	48V			
MVAD160-12	TTUVV	110W	TOUW	12V	no aux output		
MVAD160-24				24V	no remote sense		
MVAD160-48				48V	no V1 remote		

INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Input Voltage Operating Dange	Single phase	85 <sup>1</sup>	120/230	264	Vac
Input Voltage Operating Range	DC <sup>2</sup>	200		300	Vdc
Input Frequency		47	50/60	63	Hz
Turn-on Input Voltage	Input rising at full load			84	Vac
Turn-off Input Voltage	Input falling at full load			84	Vac
Input Current	90Vac input, full load			2.1	Α
Inrush Current	At 264Vac, at 25°C cold start		100		Apk

OUTPUT CHARACTERISTICS								
Model Number	Main Output Voltage (V1)	Load Current	Load Capacitance	Line, Load, Cross Regulation	Typical Efficiency @230Vac full load			
MVAD160-12x	12V	0 to 13.34A	0 to 1500μF		92%			
MVAD160-24x	24V	0 to 6.67A	0 to 680μF	± 2%	93%			
MVAD160-48x	48V	0 to 3.34A	0 to 330μF		9370			
Model Number	Aux Output Voltage (V2)	Load Current	Load Capacitance	Line, Load, Cross Regulation				
MVAD0160-xx5	5V	0 to 0.1A	0 to 220pF	± 5%				

Main Output Characteristics (all models)						
Parameter	Conditions	Min.	Max.	Units		
Transient Response	50% load step, min.5% load, 1A/µsec slew rate		± 5	%V1		
Settling Time to 1% of Nominal	50% load step, min.5% load, 1A/µsec slew rate		2	msec		
Turn On Delay	After application of input power		1.5	sec		
Output Voltage Rise	Monotonic, <sup>5</sup> 0 to 100% load		200	msec		
Setpoint Accuracy	115Vac, 110W load, 25°C		$\pm 0.5$	%V1		
Output Holdup	100% load	10		msec		
Temperature Coefficient			0.02	%/°C		
Ripple Voltage & Noise <sup>3</sup>	min. 5% load		1	%V1		
Remote Sense	Compensates for up to total 400mV of positive and negative lead drops with remote sense connected.		400	mV		

- 1 Refer to power derating curve vs. input voltage. Input test condition on safety approval :  $100-240 \text{Vac} \pm 10\%$ .
- 2 Applicable for IT Equipment only.
- 3 Ripple and noise are measured with 0.1  $\mu$ F of ceramic capacitance and 47  $\mu$ F of electrolytic capacitance on each of the power supply outputs. The output noise requirements apply over a 0 Hz to 20 MHz bandwidth. A short coaxial cable with 50 $\Omega$  scope termination is used.
- 4 Unless otherwise specified all readings are taken at 115Vac input and 25°C ambient temperature.
- 5 This power supply may exhibit up to 5% turn on overshoot.



#### 110W Wide Operating Temperature range AC-DC Power Supply

- IT (2nd Ed.) and Medical (3rd Ed. MOPP) safety approved, excluding conduction cooling condition
- 2" x 4" standard footprint
- High efficiency up to 93%
- Remote sense
- Remote On/Off (for V1, Negative logic)
- Universal AC input
- Low profile 1U package
- Convection, conduction, and forced-air cooled
- Complies with 5000m altitude (at class I IT equipment)
- RoHS compliant
- Less than 0.3W input power at no load remote "off"
- Complies with ErP/Energy star requirement (average efficiency > 87%)



Available now at http://power.murata.com/acdc3d







# 160W 2" X 4" AC-DC Power Supply Converter

ENVIRONMENTAL CHARACTERISTIC	<u>s</u>						
Parameter	Conditions	Min.	Тур.	Max.	Units		
Storage Temperature Range		-40		85			
Operating Temperature Range	Refer to power derating curve vs. operating temperature	-40		85	°C		
	Start up	-40					
Operating Humidity	Non-condensing	10		95	%		
Operating Altitude	For class I IT equipment deployment	-200		5000	m		
Operating Altitude	Other	-200		2000	m		
MTBF	Telcordia SR-332 M1C3 50°C, 110W	1M			Hours		
Shock	Operating, IEC60068-2-27, half-sine 5G, 6ms, 3 times per face, 6 faces	Complies					
	Non-operating, IEC60068-2-27, half-sine, 30G, 18ms, 3 times per face, 6 faces	Complies					
Will walking	Operating, IEC60068-2-6, 1.0G, 10-150Hz, 10minutes per axis, on all 3 axes	Lomnies					
Vibration	Non-operating, IEC60068-2-6, 2.0G, 10-150Hz, 10minutes per axis, on all 3 axes	Complies					
Safety	IEC60950-1:2005 2nd Ed.; Am1:2009 EN60950-1:2006; A11:2009; A1:2010; A12:2011 UL60950-1, 2nd Ed., 2011-12-19 & CSA C22.2 No. 60950-1-07, 2nd Ed., 2011-12 IEC60601-1:2005 3rd Ed. + CORR.1(2006) + CORR.2(2007) ANSI/AAMI ES60601-1 (2005+C1:09 + A2:10), CSA-C22.2 No. 60601-1(2008), MOPP CE Marking per LVD						
Warranty	2 years <sup>6</sup>	2 years <sup>6</sup>					
Outside Dimensions	2.0" x 4.0" x 1.5" (50.8mm x 101.6mm x 38.1mm)						
Weight	0.42lbs (190g) typical						

PROTECTION CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Overvoltage Protection	V1; Latching (50% load)	110		140	
	V2; Latching (50% load)	110		170	%
Overcurrent Protection	V1; Hiccup mode; Auto Recovery	110		170	
Overcurrent Protection	V2; Hiccup mode; Auto Recovery	0.11	0.4		Α
Overtemperature Protection	Auto recovery		Complies		

ISOLATION CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Isolation	Primary to Earth Ground (1x MOPP)	1500			Vac	
	Primary to Secondary (2x MOPP) <sup>7</sup>	4000			Vac	
	Secondary to Earth Ground	500			Vdc	
Leakage Current (under normal conditions)	264Vac, 60Hz, 25°C			350	μΑ	
Leakage Current (under normal conditions)	240Vac, 60Hz, 25°C			300	μΑ	
Touch Current	264Vac, 60Hz, 25°C			100	μΑ	

EMISSIONS AND IMMUNITY		
Characteristic	Standard	Compliance
Input Current Harmonics	IEC/EN 61000-3-2	Class D, Class C
Voltage Fluctuation and Flicker	IEC/EN 61000-3-3	Complies
Conducted Emissions	EN 55022	Class B, (Class A as Class II equipment deployment)
Conducted Emissions	FCC Part 15	Class B, (Class A as Class II equipment deployment)
ESD Immunity	IEC/EN 61000-4-2	Level 4, Criterion A
Radiated Field Immunity	IEC/EN 61000-4-3	Level 2, Criterion A
Electrical Fast Transient Immunity	IEC/EN 61000-4-4	Level 3, Criterion A
Surge Immunity	IEC/EN 61000-4-5	Level 4, Criterion A
RF Conducted Immunity	IEC/EN 61000-4-6	Level 2, Criterion A
Magnetic Field Immunity	IEC/EN 61000-4-8	Level 2, Criterion A
Voltage dips, interruptions	IEC/EN 61000-4-11	Level 3, Criterion B

<sup>6</sup> At Ta<50°C.

### power.murata.com

<sup>7</sup> Class I equipment deployment.



# **MVAD160 Series**

### 160W 2" X 4" AC-DC Power Supply Converter

CONTROL SIGNAL	
Parameter	Conditions
V1 Remote	This signal must be pulled low state (maximum of 0.2Vdc, sink current >15mA) to V2 return terminal to turn on the main V1 output. The power supply shall include an internal pull up resistor to an internal 12Vdc to disable the main V1 output if the signal is left open. The power supply shall not pull this signal down if there is no AC input. The open circuit voltage present when in the "open" state shall not exceed 15Vdc.
	The AUX output is independent of the V1 remote signal.

#### **EMI CONSIDERATIONS**


For optimum EMI performance, the power supply should be mounted to a metal plate grounded to all 4 mounting holes of the power supply. To comply with safety standards, this plate must be properly grounded to protective earth (see mechanical dimension notes). Pre-compliance testing has shown that a standalone power supply complies with EN55022 class A radiated emissions. Radiated emission results vary with system enclosure and cable routing paths.


#### **SAFETY CONSIDERATIONS**




- 1. This power supply is a component level power supply intended for use in Class I or Class II applications. Secondary ground traces need to be suitably isolated from primary ground traces when used in class II applications.
- 2. When the power supply is used in Class II equipment, all ground traces and components connected to the primary side are considered primary for spacing and insulation considerations.


#### PERFORMANCE DATA








Inrush waveform (AC264V 25°C) Peak 84.0A






160W 2" X 4" AC-DC Power Supply Converter

### MECHANICAL DIMENSIONS

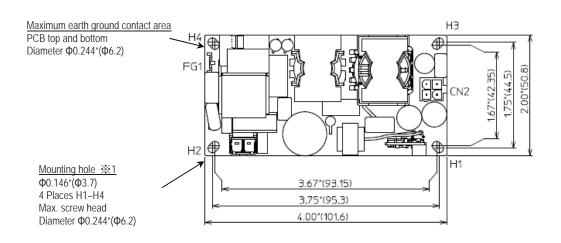

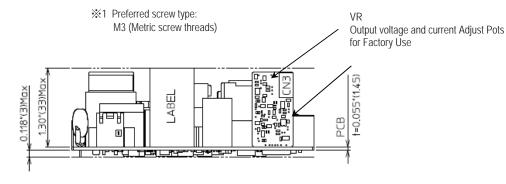

All dimensions in inches (mm). Tolerance is  $\pm$ -0.02" (0.5)

Mounting holes H3 and H4 should be earth-grounded for EMI purpose.

Mounting holes H4 is earth ground connection

This power supply requires mounting on standoffs minimum 0.197" (5.0) in height for forced air cooling.

Dimensions: 2.0" x 4.0" x 1.5" (50.8mm x 101.6mm x 38.1mm)

INPUT/OUT	PUT CONNECTOR AND SIGNAL SPECIFI	CATION AND MATING CONNECTORS	3	
Pin	Description	Mating Housing	Crimp terminal/pins	Outline
Input Cor	nnector CN1: TE Connectivity 5-1376382-1			A THACK MAKE
1	Line (V-)	TE Connectivity 1376388-1	TE Connectivity 1376348-1	
2	Neutral (V+)			
	Spade Connector: #250			
GND	Earth Ground			A Later
Outp	ut Connector CN2: Molex 39-28-8040			(Ta)
1, 2	V1	Molex 39-01-2040	Molex 39-00-0038	34
3, 4	V1 Return			
	ut Connector CN3: Molex 87438-0643 for models with auxiliary output			Circuit #1
1	V2			→ 1.50 ←
2	V2 Return	Molex 87439-0600	Molex 87421-0000	
3	V1 Remote	Willex 67439-0000	WIDIEX 67421-0000	# # # # # # # # # # # # # # # # # # #
4	V1 -Sense			
5	N.C			
6	V1 +Sense			

### power.murata.com






## 160W 2" X 4" AC-DC Power Supply Converter

#### THERMAL CONSIDERATIONS

#### **Conduction Cooling Image (and Preferred Interface Materials)**

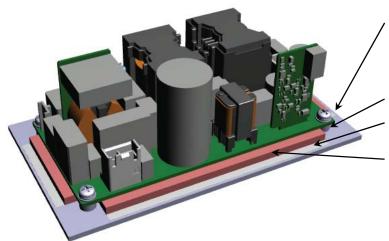

#### Aluminum Baseplate:

Thickness 2.5 to 3mm

Maximum operating temperature +85°C (measurement point: center on the back side of baseplate)

#### Preferred mounting on standoffs: 3.5mm

#### Isolation sheet or Isolation tape

Preferred materials: thickness 50 to 130um, 94V-0

#### Thermal Sheet or Thermal Gel:

Preferred Materials:

Type: Sarcon 300G-ae (thickness 3mm, thermal conductivity 1.3W/m·K) Manufacturer: Fuji Polymer


Type: GEL30 (thermal conductivity 3.5W/m·K)


Manufacturer: Parker

#### **Forced Air Cooling**

System thermal management is critical to the performance and reliability of the MVAC series power supplies. Performance derating curves are provided which can be used as a guideline for what can be achieved in a system configuration with controlled airflow at various input voltage conditions.

The air flow curves are generated using an AMCA 210-99 and ASHRAE 51-1999 compliant wind tunnel with heated inlet air and a controlled CFM providing a duct test section having a calculated average LFM. A correlation between the test setup and the actual system environment is paramount to understanding what can be achieved in an actual system. In a power supply of this density, cooling air moving both through the unit as well as around the unit strongly influences local temperatures. The wind tunnel test setup was constructed to produce a flow with a slight back pressure to induce both flow conditions by providing a small gap between the power supply and duct walls of 0.5" (13mm). The optimal and characterized airflow direction is from the input connector to the output connector (see diagram below). The P-Q flow curve for this test setup is also shown below.

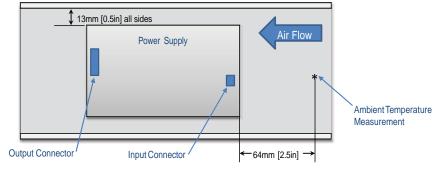







# **MVAD160 Series**

# 160W 2" X 4" AC-DC Power Supply Converter





Murata Manufacturing Co., Ltd. Power Device Product Division Nagaokakyo-shi, Kyoto 617-8555 Japan ISO 9001 and 14001 REGISTERED



This product is subject to operating requirements and the Life and Safety Critical Application Policy. Click <a href="here">here</a> to view policy. Please contact us regarding restricted materials compliance beyond the RoHS directive.

Murata makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify Murata, its affiliated companies, and its representatives against any damages arising out of the use of any Murata products in safety-critical applications. Specifications are subject to change without notice.

© 2015 Murata Manufacturing Co., Ltd. All Rights Reserved.

power.murata.com