


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X5R 0.22 uF 50V (0402X224M500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [uF]	0.22(±20%)
DF	≤ 10%
IR [M-ohm]	≥ 0.227


3. Impedance/ESR-Frequency

(Equipment: 4294A)

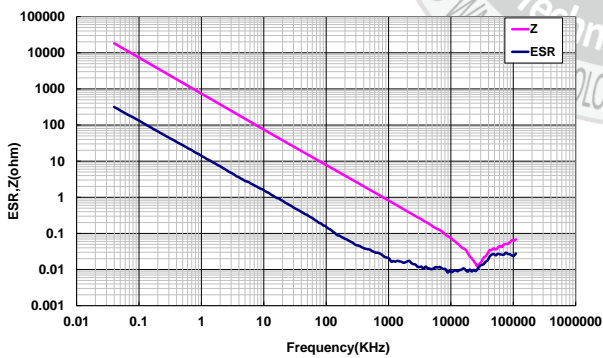

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

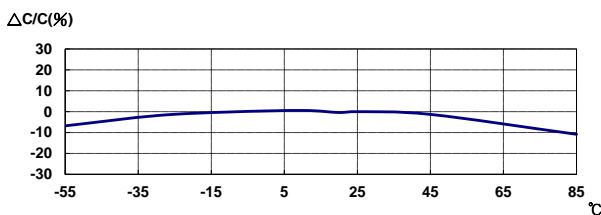

5. Temperature Rise – Ripple Current

(Equipment: 11810)


Over the measure limit.

6. Capacitance – DC Voltage Characteristics

(Equipment: 4980A+B1505A+N1259A)

(DC charge 60±5sec)

25V : -84.74% ; 50V : -93.08%

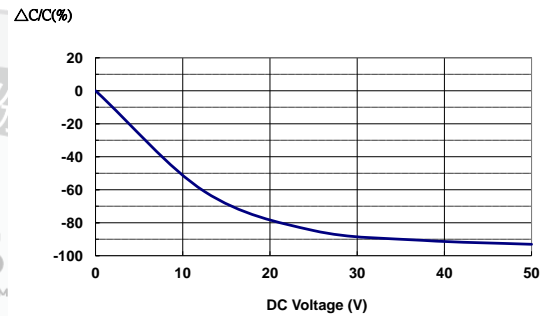

7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

