


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0402 X5R 2.2uF 10V (0402X225K100CT)

#### 1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.5±0.05	0.5±0.05


#### 2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 10V, 120sec)

Item	Spec
Cap [uF]	2.2 (±10%)
DF	≤ 15%
IR [G-ohm]	≥ 0.023


#### 3. Impedance/ESR-Frequency

(Equipment: 4294A)

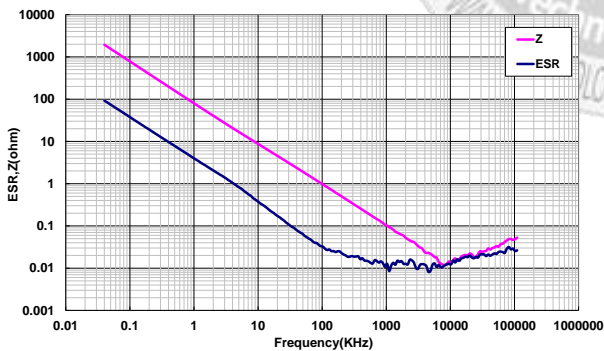


#### 4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

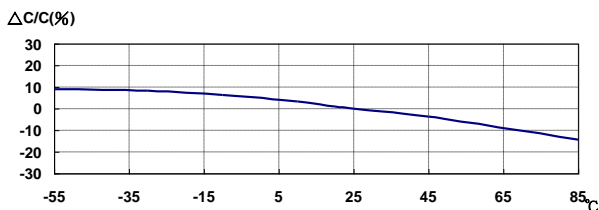

#### 5. Temperature Rise – Ripple Current


(Equipment: 11810)

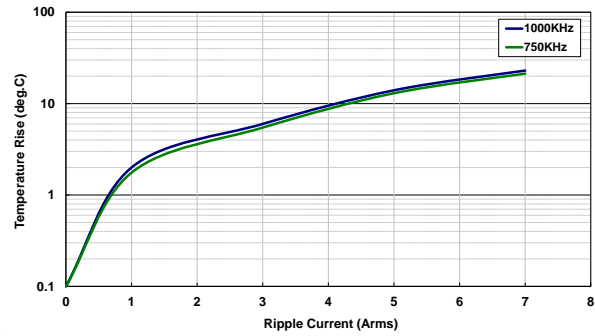

#### 6. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

5V : -67.45% ; 10V : -86.75%

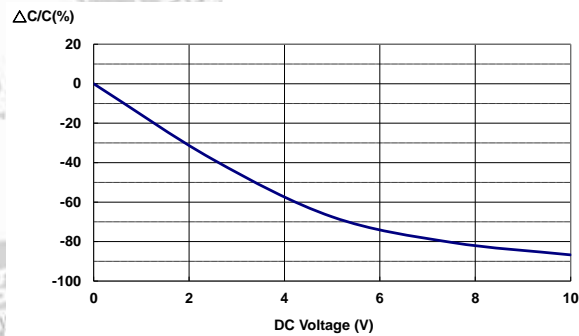

#### 7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

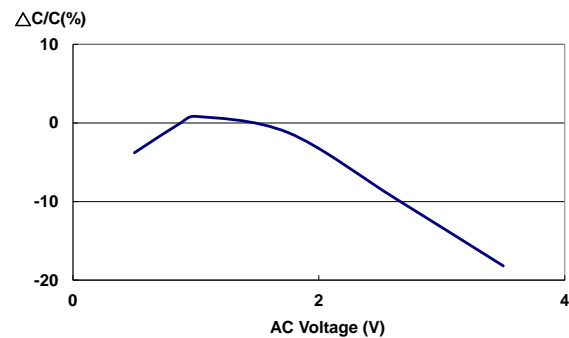

Last updated : 2020/09/28