


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X5R 2.2uF 10V (0402X225M100CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.5±0.05	0.5±0.05


2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 10V, 120sec)

Item	Spec
Cap [uF]	2.2 (±20%)
DF	≤ 15%
IR [G-ohm]	≥ 0.023


3. Impedance/ESR-Frequency

(Equipment: 4294A)

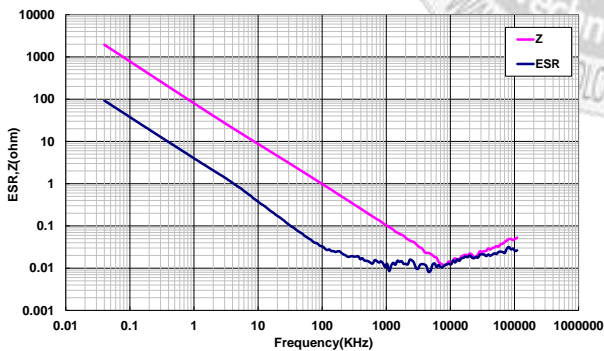


4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

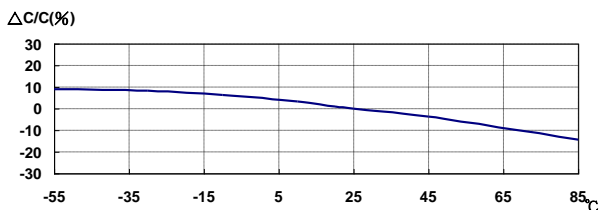

5. Temperature Rise – Ripple Current


(Equipment: 11810)

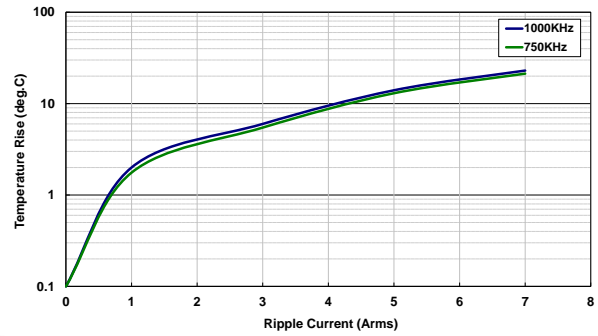

6. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

5V : -67.45% ; 10V : -86.75%

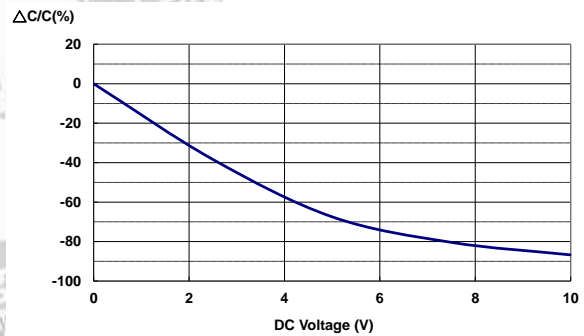

7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

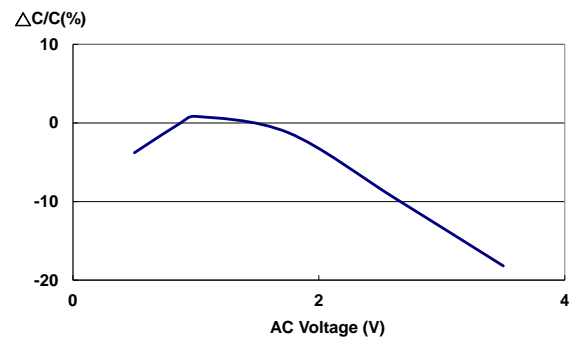

Last updated : 2020/09/28