


# BD896, BD898, BD900, BD902 PNP SILICON POWER DARLINGTONS

**BOURNS®**

- Designed for Complementary Use with BD895, BD897, BD899 and BD901
- 70 W at 25°C Case Temperature
- 8 A Continuous Collector Current
- Minimum  $h_{FE}$  of 750 at 3V, 3A

TO-220 PACKAGE  
(TOP VIEW)

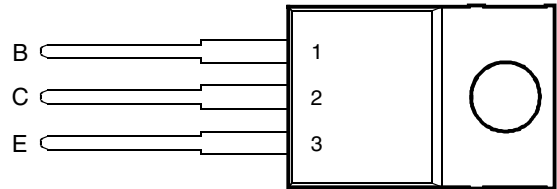

Pin 2 is in electrical contact with the mounting base.

MDTRACA



This series is obsolete and not recommended for new designs.

### absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage ( $I_E = 0$ )	BD896	$V_{CB0}$	-45	V
	BD898		-60	
	BD900		-80	
	BD902		-100	
Collector-emitter voltage ( $I_B = 0$ )	BD896	$V_{CE0}$	-45	V
	BD898		-60	
	BD900		-80	
	BD902		-100	
Emitter-base voltage		$V_{EB0}$	-5	V
Continuous collector current		$I_C$	-8	A
Continuous base current		$I_B$	-0.3	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 1)		$P_{tot}$	70	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 2)		$P_{tot}$	2	W
Operating free-air temperature range		$T_A$	-65 to +150	°C
Operating junction temperature range		$T_j$	-65 to +150	°C
Storage temperature range		$T_{stg}$	-65 to +150	°C

NOTES: 1. Derate linearly to 150°C case temperature at the rate of 0.56 W/°C.  
2. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.

## PRODUCT INFORMATION

AUGUST 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

**BD896, BD898, BD900, BD902**  
**PNP SILICON POWER DARLINGTONS**



**electrical characteristics at 25°C case temperature (unless otherwise noted)**

PARAMETER	TEST CONDITIONS			MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = -100 \text{ mA}$	$I_B = 0$	(see Note 3)	BD896 BD898 BD900 BD902	-45 -60 -80 -100		V
$I_{CEO}$ Collector-emitter cut-off current	$V_{CE} = -30 \text{ V}$	$I_B = 0$		BD896 BD898 BD900 BD902		-0.5 -0.5 -0.5 -0.5	mA
$I_{CBO}$ Collector cut-off current	$V_{CB} = -45 \text{ V}$	$I_E = 0$		BD896		-0.2	mA
	$V_{CB} = -60 \text{ V}$	$I_E = 0$		BD898		-0.2	
	$V_{CB} = -80 \text{ V}$	$I_E = 0$		BD900		-0.2	
	$V_{CB} = -100 \text{ V}$	$I_E = 0$		BD902		-0.2	
	$V_{CB} = -45 \text{ V}$	$I_E = 0$	$T_C = 100^\circ\text{C}$	BD896		-2	
	$V_{CB} = -60 \text{ V}$	$I_E = 0$	$T_C = 100^\circ\text{C}$	BD898		-2	
	$V_{CB} = -80 \text{ V}$	$I_E = 0$	$T_C = 100^\circ\text{C}$	BD900		-2	
$V_{CB} = -100 \text{ V}$	$I_E = 0$	$T_C = 100^\circ\text{C}$	BD902		-2		
$I_{EBO}$ Emitter cut-off current	$V_{EB} = -5 \text{ V}$	$I_C = 0$	(see Notes 3 and 4)			-2	mA
$h_{FE}$ Forward current transfer ratio	$V_{CE} = -3 \text{ V}$	$I_C = -3 \text{ A}$	(see Notes 3 and 4)	750			
$V_{CE(sat)}$ Collector-emitter saturation voltage	$I_B = -12 \text{ mA}$	$I_C = -3 \text{ A}$	(see Notes 3 and 4)			-2.5	V
$V_{BE(on)}$ Base-emitter voltage	$V_{CE} = -3 \text{ V}$	$I_C = -3 \text{ A}$	(see Notes 3 and 4)			-2.5	V
$V_{EC}$ Parallel diode forward voltage	$I_E = -8 \text{ A}$	$I_B = 0$				-3.5	V

NOTES: 3. These parameters must be measured using pulse techniques,  $t_p = 300 \mu\text{s}$ , duty cycle  $\leq 2\%$ .

4. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

**thermal characteristics**

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.79	$^\circ\text{C/W}$
$R_{\theta JA}$ Junction to free air thermal resistance			62.5	$^\circ\text{C/W}$

**resistive-load-switching characteristics at 25°C case temperature**

PARAMETER	TEST CONDITIONS †			MIN	TYP	MAX	UNIT
$t_{on}$ Turn-on time	$I_C = -3 \text{ A}$	$I_{B(on)} = -12 \text{ mA}$	$I_{B(off)} = 12 \text{ mA}$		1		$\mu\text{s}$
$t_{off}$ Turn-off time	$V_{BE(off)} = 3.5 \text{ V}$	$R_L = 10 \Omega$	$t_p = 20 \mu\text{s}$ , dc $\leq 2\%$		5		$\mu\text{s}$


† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

**PRODUCT INFORMATION**

AUGUST 1993 - REVISED SEPTEMBER 2002  
 Specifications are subject to change without notice.


**TYPICAL CHARACTERISTICS**

**TYPICAL DC CURRENT GAIN  
vs  
COLLECTOR CURRENT**

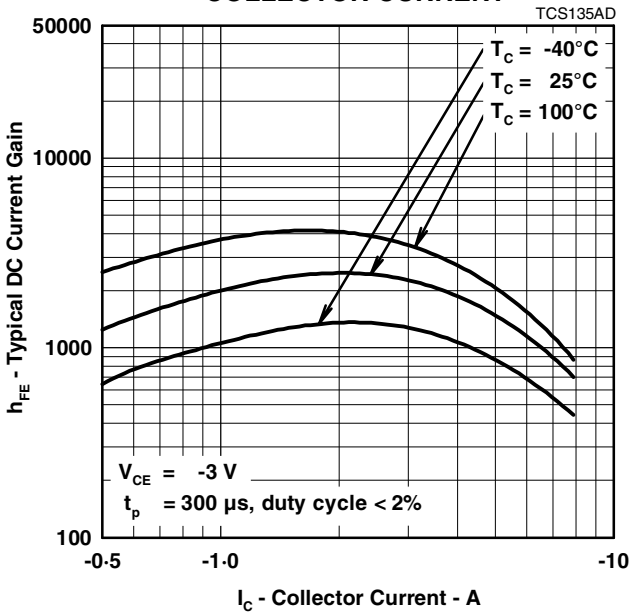


**Figure 1.**

**COLLECTOR-EMITTER SATURATION VOLTAGE  
vs  
COLLECTOR CURRENT**

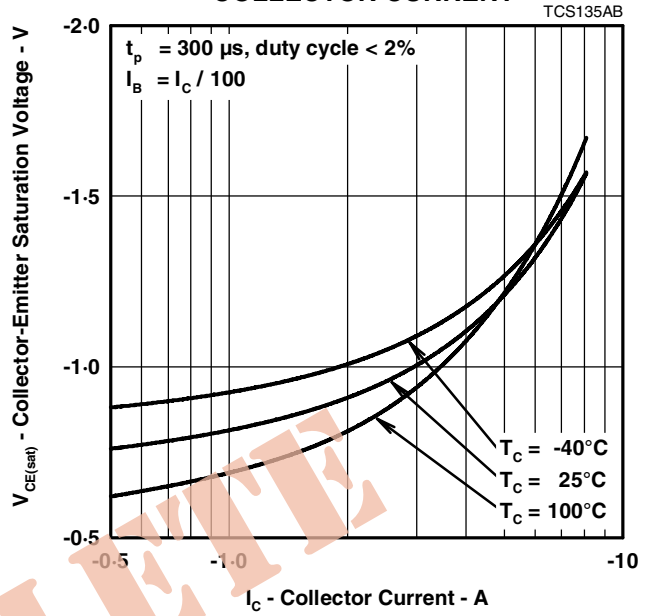

**Figure 2.**

**BASE-EMITTER SATURATION VOLTAGE  
vs  
COLLECTOR CURRENT**

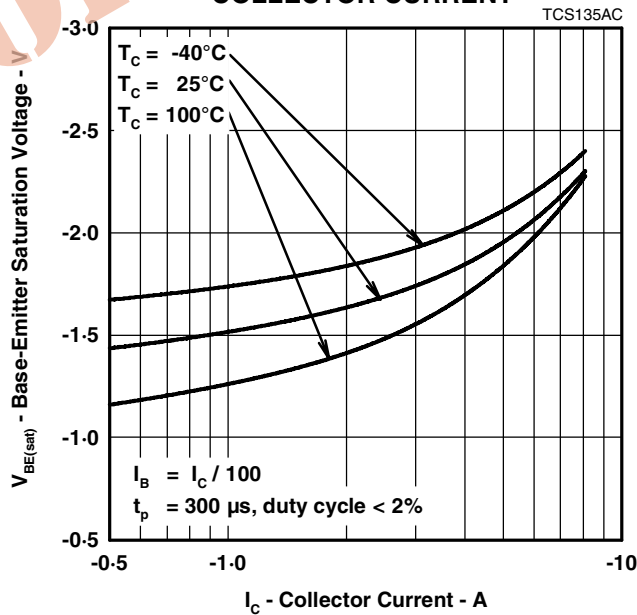

**Figure 3.**

**PRODUCT INFORMATION**

AUGUST 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

**MAXIMUM SAFE OPERATING REGIONS**

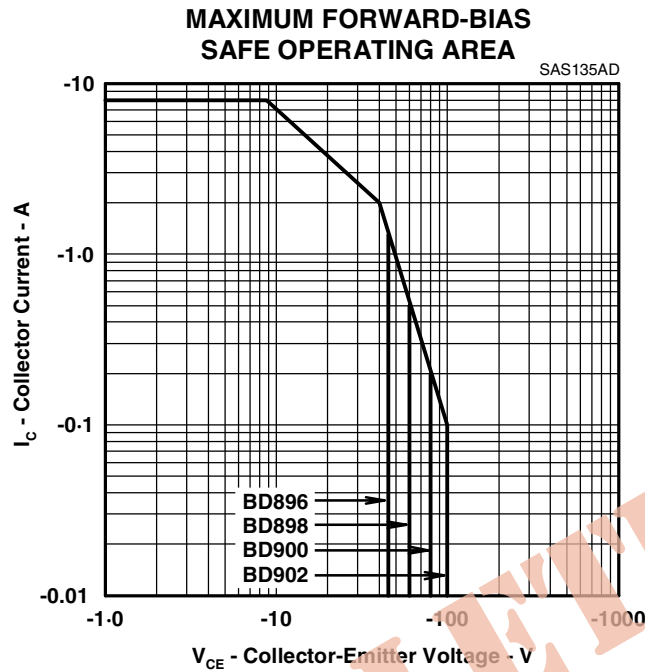


Figure 4.

**THERMAL INFORMATION**

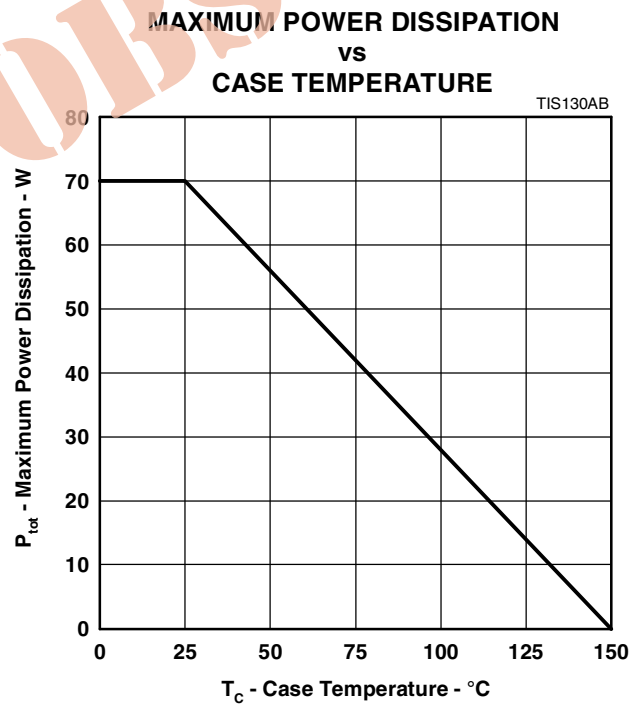


Figure 5.

**PRODUCT INFORMATION**

AUGUST 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.