


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 X7R 0.12uF 16V(0603B124K160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 16V, 120sec)

Item	Spec
Cap [uF]	0.12 (±10%)
DF	≤ 3.5%
IR [G-ohm]	≥ 4.17


3. Impedance/ESR-Frequency

(Equipment: 4294A)

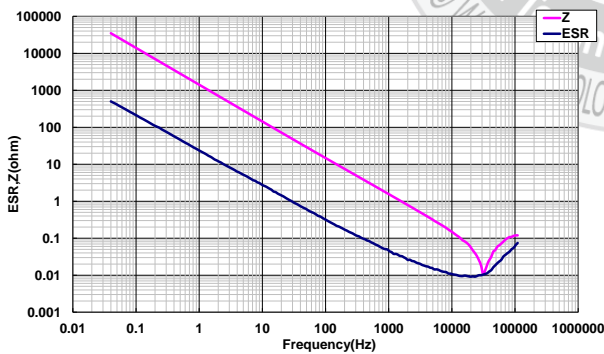


4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

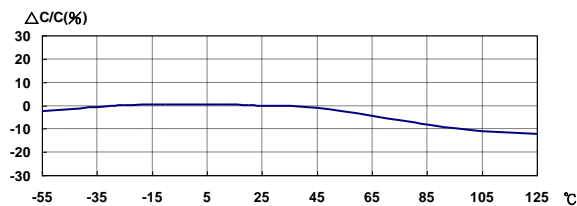

5. Temperature Rise – Ripple Current


(Equipment: 11810)

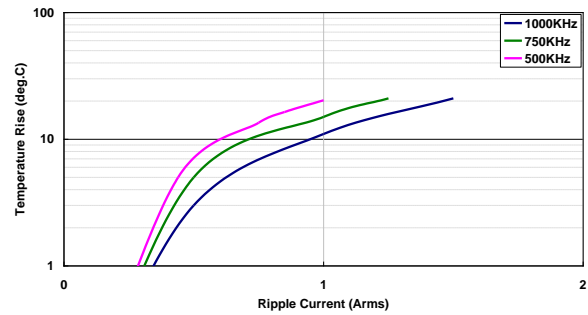

6. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

8V : -8.8% ; 16V : -33.5%

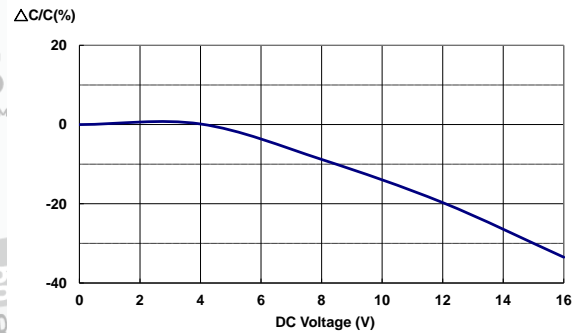

7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

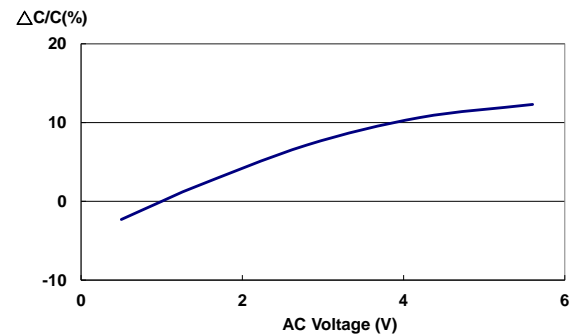

Last updated : 2021/8/23