

Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 X7R 150pF 200V(0603B151K201CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.20	0.80±0.20	0.80±0.20


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @200V, 120sec)

Item	Spec
Cap [pF]	150(±10%)
DF	≤ 2.5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency

(Equipment: 4287A)

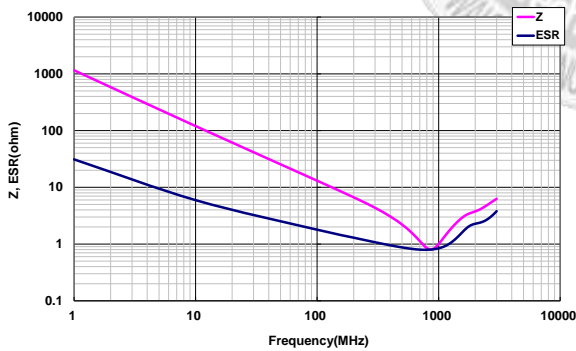


5. Capacitance – DC Voltage Characteristics

(Equipment: 4980A+B1505+N1259)


(DC charge 60±5sec)

100V : -5.36% ; 200V : -22.98%

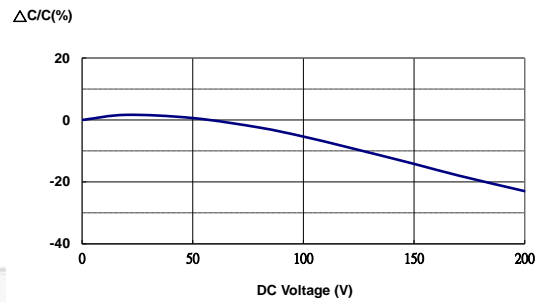


6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

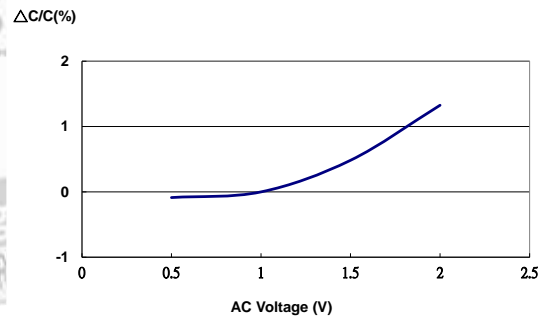

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

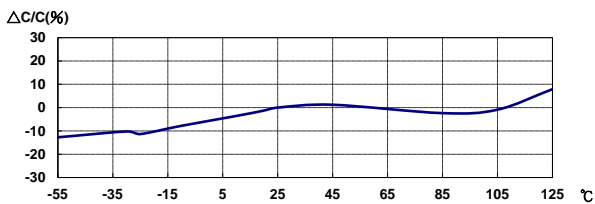

Last updated : 2020/6/10