


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0805 Y5V 1uF 25V (0805F105Z250CT)

1. Dimension

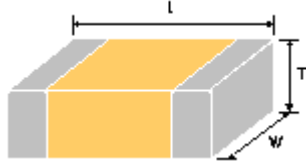

Size Inch (mm)	L (mm)	W (mm)	T (mm)
0805 (2012)	2.00±0.15	1.25±0.10	1.25±0.10


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @25V, 120sec)

Item	Spec
Cap [uF]	1 (-20/+80%)
DF	≤ 12.5%
IR [M-ohm]	≥500


3. Impedance/ESR-Frequency

(Equipment: 4294A)

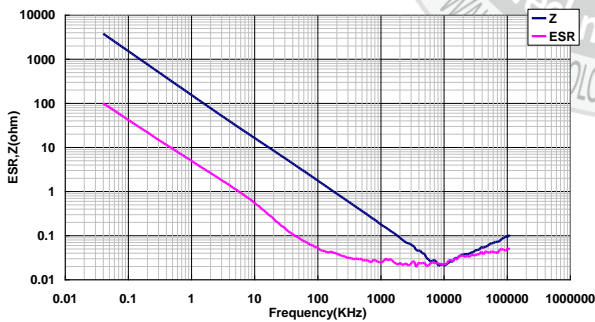


4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

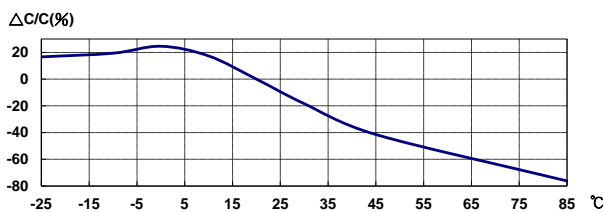

5. Temperature Rise – Ripple Current


(Equipment: 11810)

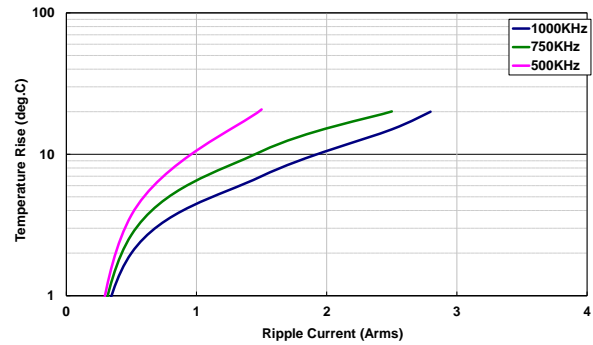

6. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

12.5V : -73.01% ; 25V : -87.52%

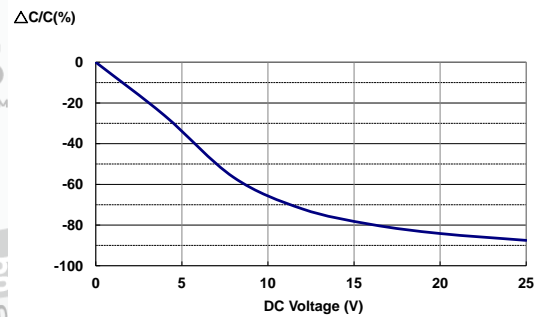

7. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

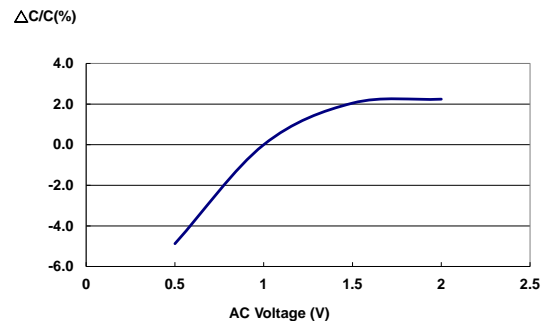

Last updated : 2019/03/27