

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0805 NPO 120pF 100V (0805N121G101CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0805 (2012)	2.00±0.15	1.25±0.10	0.60±0.10


2. Cap, DF, IR @25°C

(Cap, DF @ 1MHz, 1Vrms ; IR @ 100V, 120sec)

Item	Spec
Cap [pF]	120(±2%)
DF	≤ 0.1%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency

(Equipment: 4991B)

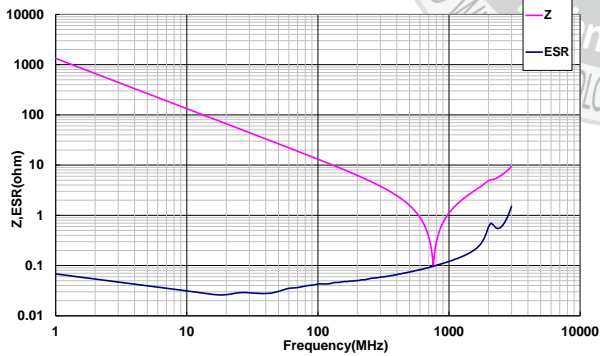


5. Capacitance – DC Voltage Characteristics

(Equipment: E4980A+B1505A+N1259A


; DC charge 60±5sec)

50V :0% ; 100V :0%

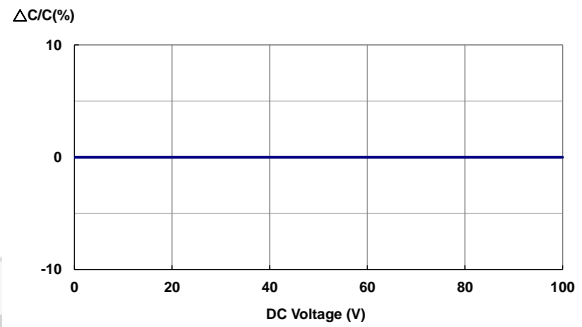


6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

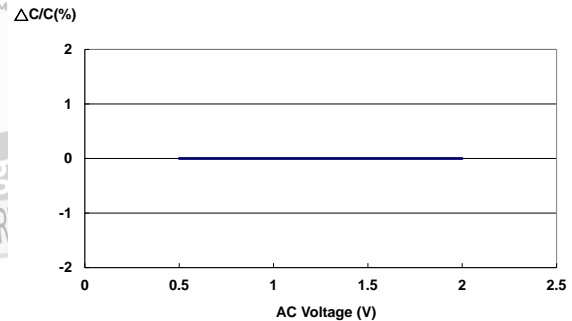

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

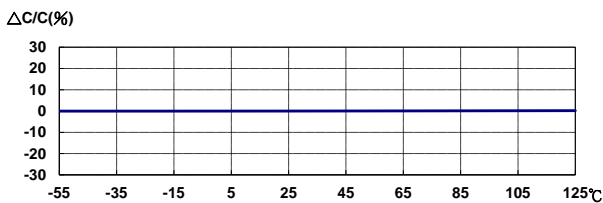

Last updated : 2020/11/06