


⚠ Not for new applications

UL **CS** **TUV**
Please contact us about TUV certified products.

Panasonic
ideas for life

**Input and output module
compact DIL type**

AQ-C RELAYS



mm inch

FEATURES

- **Compact DIL type: 20 mm (length) × 10 mm (width) × 12.8 mm (height) (.787×.394×.504 inch)**
- **Excellent in noise resistance**
- **Snubber circuit integrated**
- **High dielectric strength: 2,500 V between input and output**
- **Reverse polarity type available**

TYPES

1. Input module

| Type | Output voltage | Input voltage | Part No. |
|----------|----------------|----------------|-----------------------|
| AC input | 4 to 32 V DC | 80 to 250 V AC | AQCD3-IM 100/240 V AC |
| DC input | 4 to 32 V DC | 3 to 32 V DC | AQCD3-IM 4/24 V DC |

2. Output module

| Type | Load voltage | Input voltage | Part No. |
|-----------------------------|----------------|---------------|--------------------|
| AC output Zero-cross | 75 to 125 V AC | 5 V DC | AQC1A1 - ZT5 V DC |
| | | 12 V DC | AQC1A1 - ZT12 V DC |
| | | 24 V DC | AQC1A1 - ZT24 V DC |
| | 75 to 250 V AC | 5 V DC | AQC1A2 - ZT5 V DC |
| | | 12 V DC | AQC1A2 - ZT12 V DC |
| | | 24 V DC | AQC1A2 - ZT24 V DC |
| AC output Non zero-cross | 75 to 125 V AC | 5 V DC | AQC1A1 - T 5 V DC |
| | | 12 V DC | AQC1A1 - T 12 V DC |
| | | 24 V DC | AQC1A1 - T 24 V DC |
| | 75 to 250 V AC | 5 V DC | AQC1A2 - T 5 V DC |
| | | 12 V DC | AQC1A2 - T 12 V DC |
| | | 24 V DC | AQC1A2 - T 24 V DC |
| DC output | 3 to 60 V DC | 5 V DC | AQC1AD1- 5 V DC |
| | | 12 V DC | AQC1AD1- 12 V DC |
| | | 24 V DC | AQC1AD1- 24 V DC |

ORDERING INFORMATION

| Load current | Load voltage | Type | Input voltage | Input polarity |
|--|---|---|---|---|
| Nil: Input module 1A: Output module | 1: 75 to 125 V AC (Output module) 2: 75 to 250 V AC (Output module) D1: 3 to 60 V DC (Output module) D3: 4 to 32 V DC (Input module) | Nil: DC output IM: Input module T: AC output Non zero-cross ZT: AC output Zero-cross | Output module: 5, 12, 24 V DC Input module: 4/24 V DC, 100/240 V AC | Nil: Standard polarity R: Reverse polarity (Only for output module) |

Standard packing: Carton: 50 pcs.; Case: 500 pcs.

SPECIFICATIONS

Rating [at 20°C 68°F; Input voltage ripple (output module) and output voltage ripple (input module): max. 1%]

1. Input module

| Item | | Type | AC input | DC input | Remarks |
|-------------|----------------------------------|------|-----------------------|--------------------|--------------------------|
| | | | AQCD3-IM 100/240 V AC | AQCD3-IM 4/24 V DC | |
| Input side | Input voltage | | 80 to 250 V AC | 3 to 32 V DC | |
| | Input current | | Max. 5 mA | Max. 5 mA | |
| | Pick-up voltage | | Max. 80 V AC | Max. 3 V DC | |
| | Drop-out voltage | | Min. 10 V AC | Min. 1 V DC | |
| Output side | Load voltage | | 4 to 32 V DC | 4 to 32 V DC | |
| | Load current | | 0.1 to 25 mA | 0.1 to 25 mA | |
| | Max. "OFF-state" leakage current | | Max. 5μA | Max. 5μA | When 32 V DC applied |
| | Max. "ON-state" voltage drop | | Max. 1.6 V | Max. 1.6 V | at max. carrying current |

2. Output module

(1) AC output type

| Item | | Type | AQC1A1-ZT5VDC | AQC1A1-ZT12VDC | AQC1A1-ZT24VDC | AQC1A2-ZT5VDC | AQC1A2-ZT12VDC | AQC1A2-ZT24VDC | Remarks |
|------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|----------------|-------------------------------------|
| | | | AQC1A1-T5VDC | AQC1A1-T12VDC | AQC1A1-T24VDC | AQC1A2-T5VDC | AQC1A2-T12VDC | AQC1A2-T24VDC | |
| Input side | Input voltage | (5 V type) 4 to 6 V DC | (12 V type) 9.6 to 14.4 V DC | (24 V type) 21.6 to 26.4 V DC | (5 V type) 4 to 6 V DC | (12 V type) 9.6 to 14.4 V DC | (24 V type) 21.6 to 26.4 V DC | | See "Data 3". |
| | Input impedance (Approx.) | 0.3 kΩ | 0.8 kΩ | 1.8 kΩ | 0.3 kΩ | 0.8 kΩ | 1.8 kΩ | | |
| | Drop-out voltage, min | 0.5 V | 1.2 V | 2.4 V | 0.5 V | 1.2 V | 2.4 V | | |
| Load side | Max. load current | 1 A | | | | | | | See "Data 1". Ta = Min. 40°C |
| | Load voltage | 75 to 125 V AC | | | 75 to 250 V AC | | | | |
| | Non-repetitive surge current | 20 A | | | | | | | See "Data 2". In one cycle at 60 Hz |
| | Max. "OFF-state" leakage current | 0.6 m A (When 100 V AC applied) | | | 1.1 m A (When 200 V AC applied) | | | | at 60 Hz |
| | Max. "ON-state" voltage drop | 1.6 A | | | | | | | at max. carrying current |
| | Min. load current | 10 mA | | | 20 mA | | | | |

(2) DC output type

| Item | | Type | AQC1AD1-5VDC | AQC1AD1-12VDC | AQC1AD1-24VDC | Remarks |
|------------|----------------------------------|------|--------------------------------|---------------------------------|----------------------------------|------------------------------|
| | | | (5 V type) 4 to 6 V DC | (12 V type) 9.6 to 14.4 V DC | (24 V type) 21.6 to 26.4 V DC | |
| Input side | Input voltage | | (5 V type) 4 to 6 V DC | (12 V type) 9.6 to 14.4 V DC | (24 V type) 21.6 to 26.4 V DC | See "Data 3". |
| | Input impedance (Approx.) | | 430 Ω | 1.2 kΩ | 2.8 kΩ | |
| | Drop-out voltage, min | | 0.8 V | | | |
| Load side | Max. load current | | 1 A | | | See "Data 1". Ta = Min. 40°C |
| | Load voltage | | 3 to 60 V DC | | | |
| | Non-repetitive surge current | | 1.5 A | | | See "Data 2". at 1s |
| | Max. "OFF-state" leakage current | | 0.1 m A (When 60 V DC applied) | | | |
| | Max. "ON-state" voltage drop | | 1.6 V | | | at max. carrying current |
| | Min. load current | | 1 mA | | | |

Characteristics [at 20°C 68°F; Input voltage ripple (output module) and output voltage ripple (input module): max. 1%]

Input module

| Item | | Type | AC Input | DC Input | Remarks |
|-----------------------------|-------------|--------|--|----------|-----------------------------|
| | | | Operate time, max. | 20 ms | |
| Release time, max | 20 ms | 0.5 ms | | | |
| Insulation resistance, min. | | | 10 ⁹ Ω between input and output | | at 500 V DC |
| Breakdown voltage | | | 2,500 Vrms between input and output | | For 1 minute |
| Vibration resistance | Functional | | 10 to 55Hz double amplitude of 3 mm | | 10 minutes for X,Y, Z, axis |
| | Destructive | | 10 to 55Hz double amplitude of 3 mm | | 1 hour for X,Y, Z, axis |
| Shock resistance | Functional | | Min. 980 m/s ² {100 G} | | 4 time each for X,Y,Z axis |
| | Destructive | | Min. 980 m/s ² {100 G} | | 5 time each for X,Y,Z axis |
| Ambient temperature | | | -30°C to +80°C -22°F to +176°F | | |
| Storage temperature | | | -30°C to +100°C -22°F to +212°F | | |

Output module


| Item | Type | AC output | | DC output | Conditions |
|-----------------------------|-------------|--|--------------------------------------|-----------|-----------------------------|
| | | Non zero-cross | Zero-cross | | |
| Operate time, max. | | 1 ms | (1/2 cycle of voltage sine wave)+1ms | 0.5 ms | |
| Release time, max. | | (1/2 cycle of voltage sine wave)+1ms | | 1 ms | |
| Insulation resistance, min. | | 10 ⁹ Ω between input and output | | | at 500 V DC |
| Breakdown voltage | | 2,500 Vrms between input and output | | | For 1 minute |
| Vibration resistance | Functional | 10 to 55Hz double amplitude of 3 mm | | | 10 minutes for X,Y, Z, axis |
| | Destructive | 10 to 55Hz double amplitude of 3 mm | | | 1 hour for X,Y, Z, axis |
| Shock resistance | Functional | Min. 980 m/s ² {100 G} | | | 4 time each for X,Y,Z axis |
| | Destructive | Min. 980 m/s ² {100 G} | | | 5 time each for X,Y,Z axis |
| Ambient temperature | | -30°C to +80°C -22°F to +176°F | | | |
| Storage temperature | | -30°C to +100°C -22°F to +212°F | | | |
| Operational method | | Non zero-cross Turn-ON, Zero-cross Turn-OFF | Zero-cross (Turn-ON and Turn-OFF) | — | |

DIMENSIONS (mm inch)


Download [CAD Data](#) from our Web site.

1. Input module (AC, DC)

[CAD Data](#)

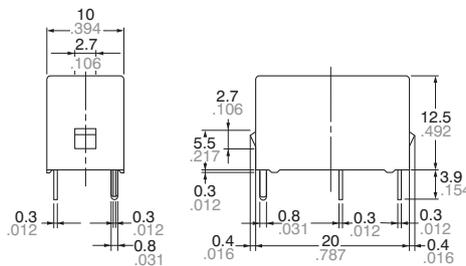


- AC input
 - ⑤ Output: DC-
 - ⑧ Output: DC+
 - ⑩ Input: AC
 - ⑪ Input: AC
 - Case color: Yellow
- DC input
 - ⑤ Output: DC-
 - ⑧ Output: DC+
 - ⑩ Input: DC+
 - ⑪ Input: DC-
 - Case color: White




General tolerance: ±0.5 ±0.020

PC board pattern (Copper-side view)

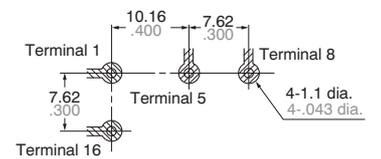

Tolerance: ±0.1 ±0.004


Schematic

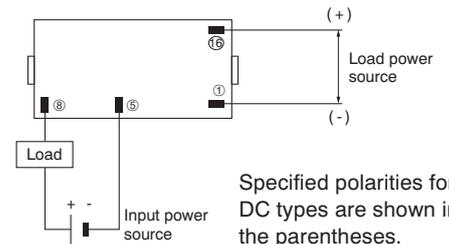


Specified polarities for DC types are shown in the parentheses.

2. Output module (AC, DC)

[CAD Data](#)

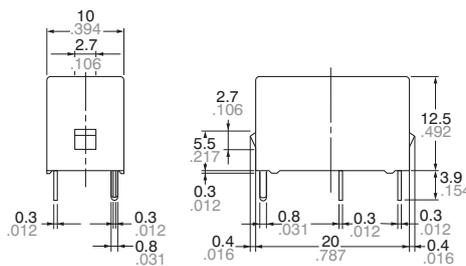


- AC output
 - ⑤ Output: AC
 - ⑧ Output: AC
 - ⑩ Input: DC+
 - ⑪ Input: DC-
 - Case color: Black
- DC output
 - ⑤ Output: DC-
 - ⑧ Output: DC+
 - ⑩ Input: DC+
 - ⑪ Input: DC-
 - Case color: Red




General tolerance: ±0.5 ±0.020

PC board pattern (Copper-side view)

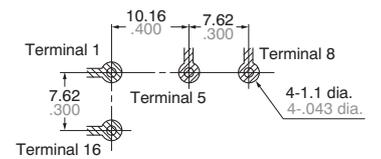

Tolerance: ±0.1 ±0.004

Schematic

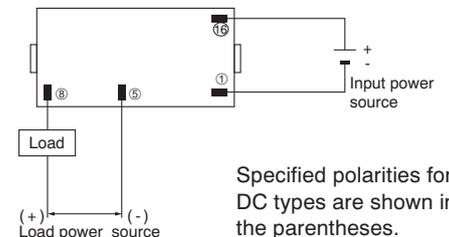

Specified polarities for DC types are shown in the parentheses.


ACCESSORY




PC1A-PS

REFERENCE DATA


1. Load current vs. ambient temperature

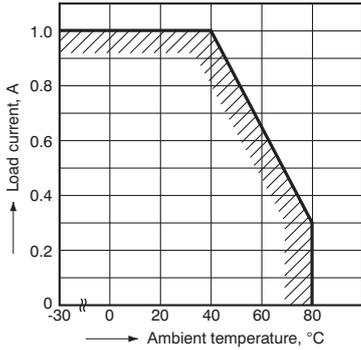


2-(1) Non-repetitive surge current vs. carrying time (AC output)

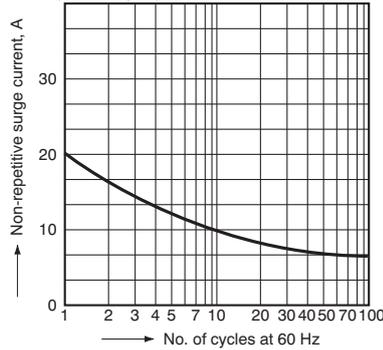

2-(2) Non-repetitive surge current vs. carrying time (DC output)

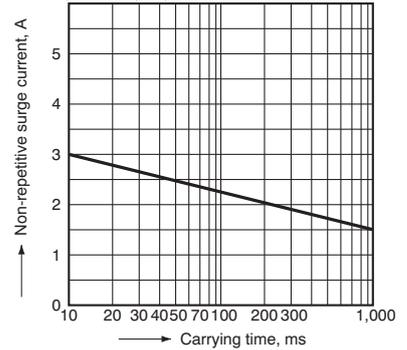


3. Input current vs. input voltage characteristics (AC/DC output)

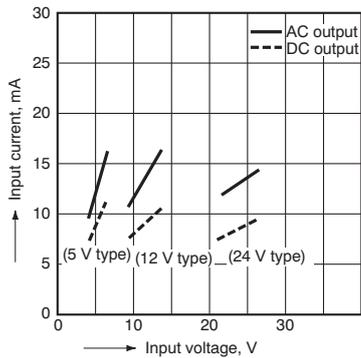


4-(1) Input current vs. input voltage characteristics (AC input)

Tested sample: AQCD3-IM100/240 V AC, 5 pcs.

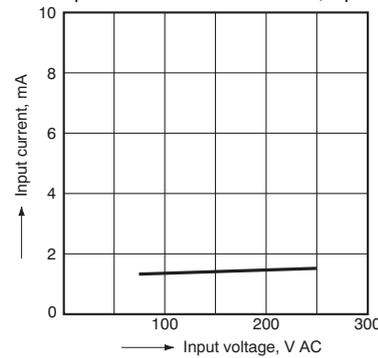


4-(2) Input current vs. input voltage characteristics (DC input)

Tested sample: AQCD3-IM4/24 V DC

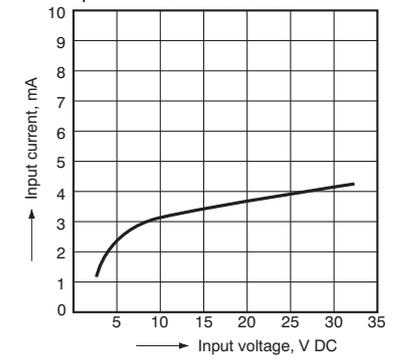

5. Load current vs. ambient temperature characteristics for adjacent mounting

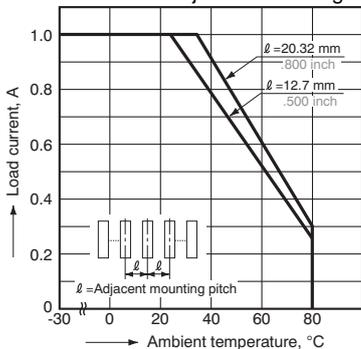

⚠ Not for new applications


NOTE

When used for the load less than rated

In the case of the load current less than rated, malfunction may result from the residual voltage across the both ends of the load even if the solid state relay is turned off.

Use a dummy resistor as a countermeasure.

The total of the current through the resistor and the load current must exceed the min. rated load current.

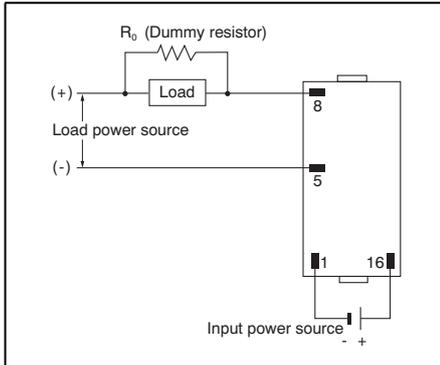


In case the dummy resistor is not used, keep in mind that the residual voltage becomes as follows:

Example:

For the inductive load by the 5 mA load current and the 200 V AC load voltage, the load impedance becomes 40 kW and $V_e/V = 16\%$ is estimated from the below graph.

Accordingly, the 32 V voltage remains across the both ends of the load when the solid state relay is turned off.

- Characteristics of residual voltage vs. load impedance

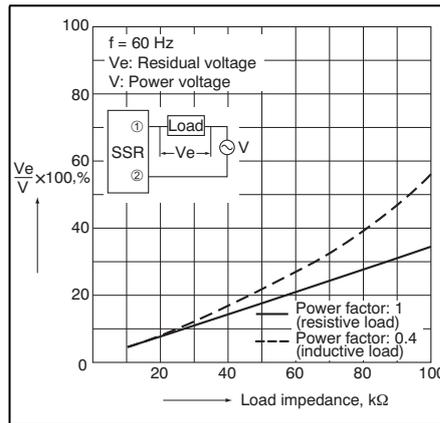

Cautions for Use