


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0805 NPO 3.3pF 50V (0805N3R3C500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0805 (2012)	2.00±0.15	1.25±0.10	0.60±0.10


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [pF]	3.3(±0.25pF)
DF	≤ 0.215%
IR [G-ohm]	≥ 10


3. Impedance/ESR-Frequency

(Equipment:4287+ENA5071C)

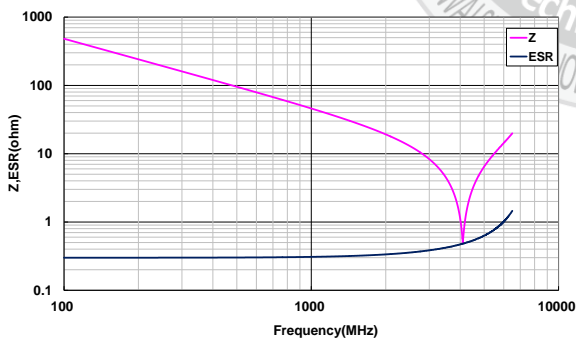

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

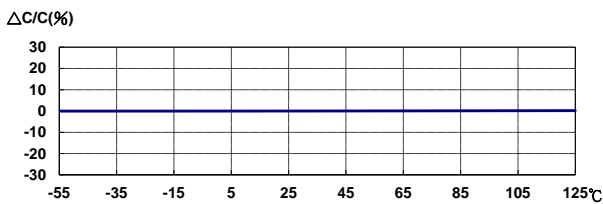


5. Capacitance – DC Voltage Characteristics

(Equipment: 4980A+B1505A+N1259A)

(DC charge 60±5sec)

25V : 0% ; 50V : 0%

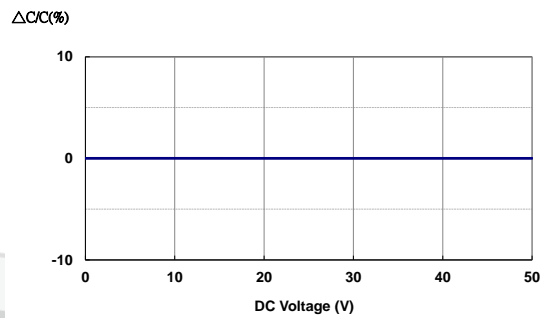

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A; AC charge 60±5sec)

