

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.


ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is and its officers, employees, subsidiaries, and filiates, and distributors harmless against all claims, costs, damages,




KSD1621 NPN Epitaxial Silicon Transistor

Features

- High Current Driver Applications
- Low Collector-Emitter Saturation Voltage
- Large Current Capacity and Wide SOA
- Fast Switching Speed
- Complement to KSB1121





Absolute Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter	Ratings	Units
V _{CBO}	Collector-Base Voltage	30	V
V _{CEO}	Collector-Emitter Voltage	25	V
V _{EBO}	Emitter-Base Voltage	6	V
Ι _C	Collector Current	2	A
P _C	Collector Power Dissipation ($T_A = 25^{\circ}C$) Derating Rate above 25°C	500 4	mW mW/°C
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

Mounted on Ceramic Board (250mm² x 0.8mm)

August 2009

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV _{CBO}	Collector-Base Breakdown Voltage	$I_{C} = 10 \mu A, I_{E} = 0$	30			V
BV _{CEO}	Collector-Emitter Breakdown Voltage	$I_{\rm C} = 1$ mA, $I_{\rm B} = 0$	25			V
BV_{EBO}	Emitter-Base Breakdown Voltage	$I_{E} = 10 \mu A, I_{C} = 0$	6			V
I _{CBO}	Collector Cut-off Current	$V_{CB} = 20V, I_E = 0$			100	nA
I _{EBO}	Emitter Cut-off Current	$V_{BE} = 4V, I_{C} = 0$			100	nA
h _{FE1} h _{FE2}	DC Current Gain	$V_{CE} = 2V, I_C = 0.1A$ $V_{CE} = 2V, I_C = 1.5A$	100 65		560	
V _{CE} (sat)	Collector-Emitter Saturation Voltage	I _C = 1.5A, I _B = 75mA		0.18	0.4	V
V _{BE} (sat)	Base-Emitter Saturation Voltage	I _C = 1.5A, I _B = 75mA		0.85	1.2	V
f _T	Current Gain Bandwidth product	V _{CE} = 10V, I _C = 50mA		150		MHz
C _{ob}	Output Capacitance	$V_{CB} = 10V, I_E = 0, f = 1MHz$		19		pF
t _{ON}	Turn On Time *	V _{CC} = 12V, V _{BF} = 5V		60		ns
t _{STG}	Storage Time *	$I_{B1} = -I_{B2} = 25mA$		500		ns
t _F	Fall Time *	$I_{C} = 0.5A, R_{L} = 25\Omega$		25		ns


Classification	R	S	т	U
h _{FE}	100 ~ 200	140 ~ 280	200 ~ 400	280 ~ 560

Package Marking and Ordering Information

Device	Device Marking	Package	Reel Size	Tape Width	Quantity
KSD1621RTF	Line 1: 1621 Line 2: R&3	SOT-89	13"		4,000
KSD1621STF	Line 1: 1621 Line 2: S&3	SOT-89	13"		4,000
KSD1621TTF	Line 1: 1621 Line 2: T&3	SOT-89	13"		4,000
KSD1621UTF	Line 1: 1621 Line 2: U&3	SOT-89	13"		4,000


Typical Performance Characteristics

Figure 1. Static Characteristic



V_{ce}[V], COLLECTOR-EMITTER VOLTAGE

Figure 3. Collector-Emitter Saturation Voltage





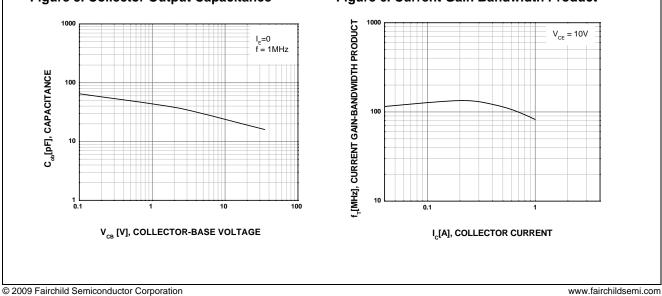


Figure 2. DC Current Gain







Figure 4. Base-Emitter On Voltage



V_{BE}[V], BASE-EMITTER VOLTAGE

Figure 6. Current Gain Bandwidth Product

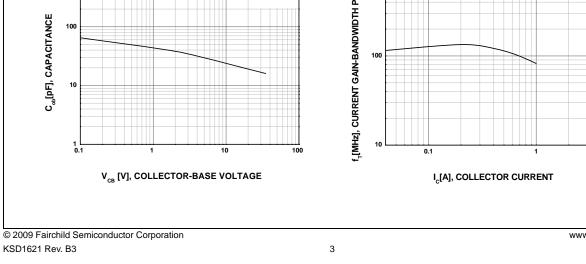


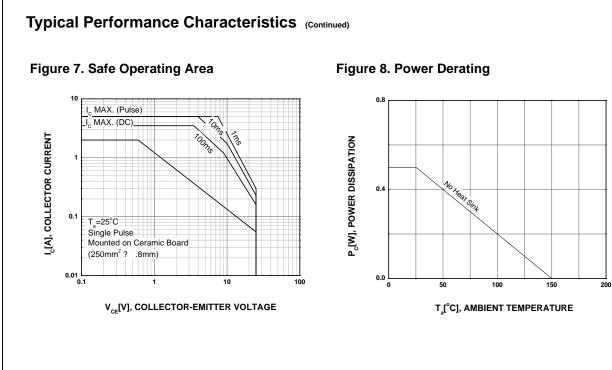

Mechanical Dimensions SOT-89 1.50 ±0.20 4.50 ±0.20 (0.40) 1.65 ±0.10 (0.50) C0.2 2.50 ±0.20 4.10 ±0.20 (1.10) 0.50 ± 0.10 0.40 ± 0.10 $0.40 \begin{array}{c} ^{+0.10}_{-0.05} \end{array}$ 1.50 TYP 1.50 TYP **Dimensions in Millimeters** © 2009 Fairchild Semiconductor Corporation

www.fairchildsemi.com

Downloaded from Arrow.com.

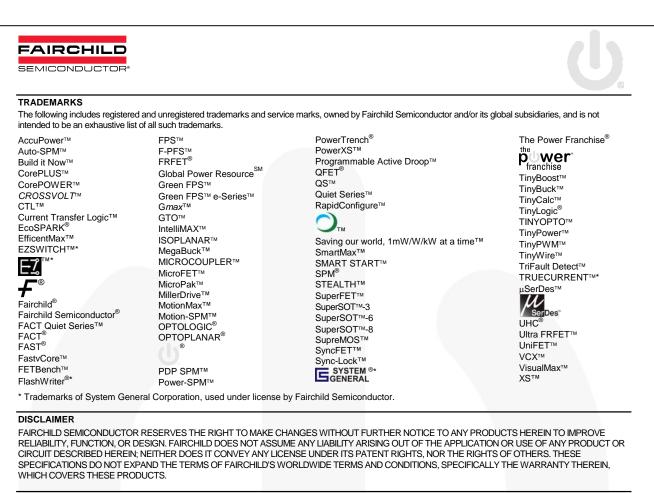

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS D	EFINITIONS
------------------	------------

s may change in
date. Fairchild rove design.
o make changes
iconductor.

© 2008 Fairchild Semiconductor Corporation

www.fairchildsemi.com

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

Downloaded from Arrow.com.