

Chip Monolithic Ceramic Capacitor

**Electrical Characteristics Data**

**HH 0402 NPO 1.0pF 50V (HH15N1R0A500CT)**

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402(1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [pF]	1.0(±0.05pF)
DF	≤ 0.24%
IR [G-ohm]	≥ 10


3. Impedance/ESR-Frequency

(Equipment: 4287A+ENA5071C)

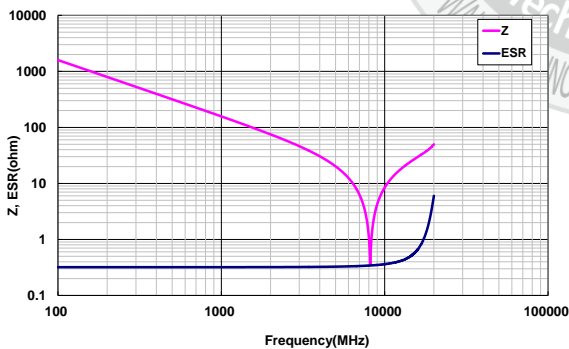

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

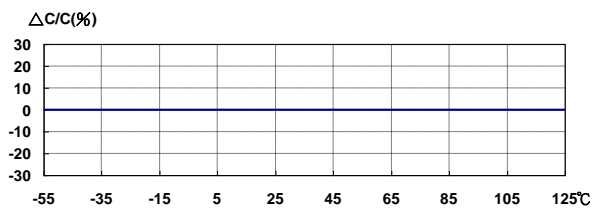


5. Capacitance – DC Voltage Characteristics

(Equipment: E4980A+B1505A+N1259A

; DC charge 60±5sec)

25V :0% ; 50V :0%

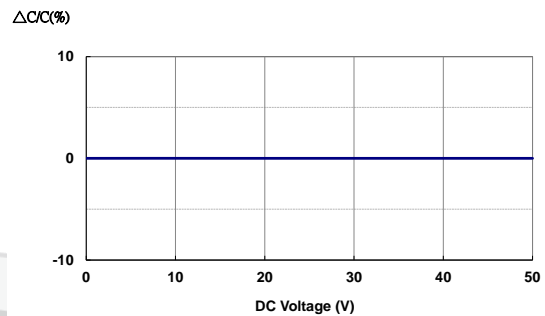

6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

