


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### HH 0402 NPO 1.5pF 50V (HH15N1R5B500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @ 1MHz, 1Vrms ; IR @ 50V, 120sec)

Item	Spec
Cap [pF]	1.5(±0.1pF)
DF	≤ 0.23%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4287A+ENA5071C)

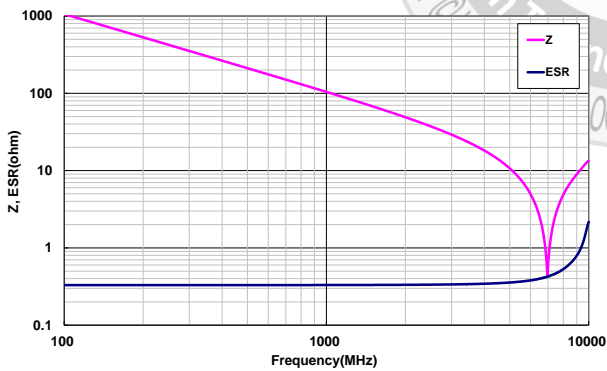

5. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

25V :0% ; 50V :0%

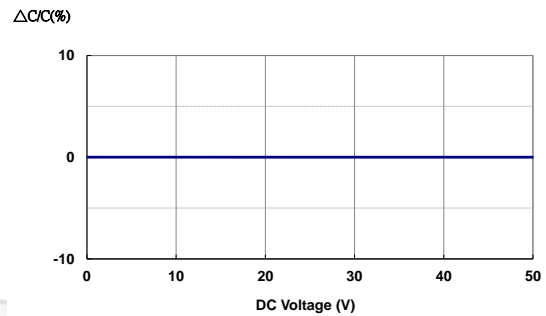

6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

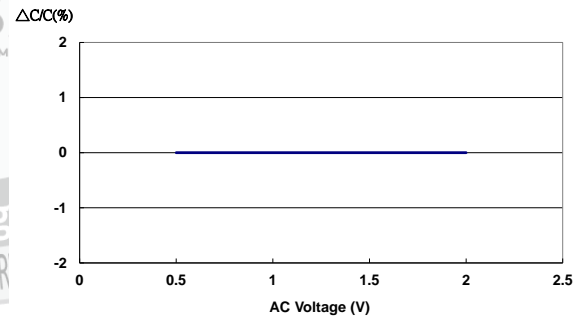

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

