


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

HH 0805 NPO 5.6pF 50V (HH21N5R6C500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0805 (2012)	2.00±0.15	1.25±0.10	0.80±0.10


2. Cap, DF, IR @25°C

(Cap, DF @ 1MHz, 1Vrms ; IR @ 50V, 120sec)

Item	Spec
Cap [pF]	5.6 (±0.25pF)
DF	≤ 0.195%
IR [G-ohm]	>10


3. Impedance/ESR-Frequency

(Equipment: 4287A+ENA5071C)

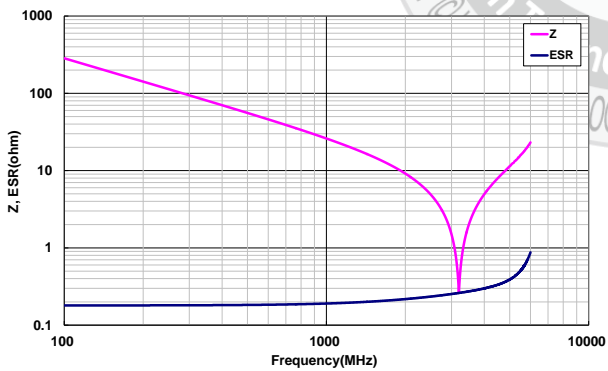

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

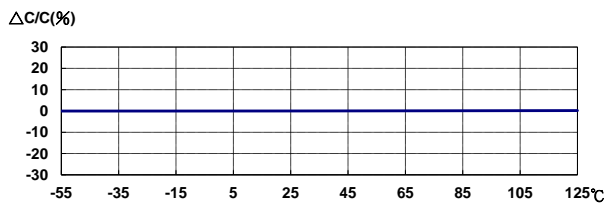

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

25V :0% ; 50V :0%

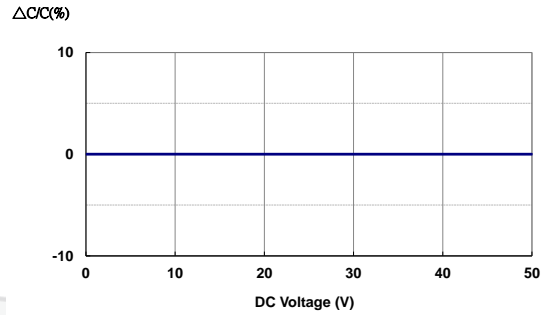

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

