

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="mailto:www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="mailto:Fairchild\_questions@onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is and its officers, employees, even if such claim any manner.

MM74C906 Hex Open Drain N-Channel Buffers

# FAIRCHILD

SEMICONDUCTOR

## MM74C906 Hex Open Drain N-Channel Buffers

#### **General Description**

The MM74C906 buffer employs monolithic CMOS technology in achieving open drain outputs. The MM74C906 consists of six inverters driving six N-channel devices. The open drain feature of these buffers makes level shifting or wire AND and wire OR functions by just the addition of pull-up or pull-down resistors. All inputs are protected from static discharge by diode clamps to  $V_{\rm CC}$  and to ground.

#### **Features**


- Wide supply voltage range: 3V to 15V
- Guaranteed noise margin: 1V
- High noise immunity: 0.45 V<sub>CC</sub> (typ.)
- High current sourcing and sinking open drain outputs


#### **Ordering Code:**

Order Number	Package Number	Package Description
MM74C906M (Note 1)	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
MM74C906N	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide
Note 1: Devices also a	available in Tape and Reel	. Specify by appending the suffix letter "X" to the ordering code.

#### **Connection Diagram**

#### Logic Diagram

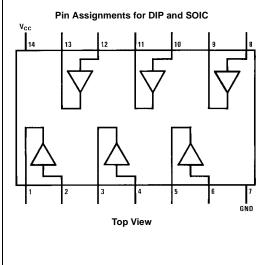



#### © 2004 Fairchild Semiconductor Corporation DS005911

### Absolute Maximum Ratings(Note 2)

Voltage at Any Input Pin	–0.3V to V <sub>CC</sub> +0.3V
Voltage at Any Output Pin	
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	$-65^{\circ}C$ to $+150^{\circ}C$
Power Dissipation	
Dual-In-Line	700 mW
Small Outline	500 mW
Operating V <sub>CC</sub> Range	3V to 15V
Absolute Maximum V <sub>CC</sub>	18V
Lead Temperature (T <sub>L</sub> )	
(Soldering, 10 seconds)	260°C

Note 2: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

#### **DC Electrical Characteristics**

Symbol	Parameter	Conditions	Min	Тур	Max	Units
CMOS TO	смоз					
V <sub>IN(1)</sub>	Logical "1" Input Voltage	$V_{CC} = 5V$	3.5			V
. ,		$V_{CC} = 10V$	8.0			v
V <sub>IN(0)</sub>	Logical "0" Input Voltage	$V_{CC} = 5V$			1.5	V
(-)		$V_{CC} = 10V$			2	v
IN(1)	Logical "1" Input Current	V <sub>CC</sub> = 15V, V <sub>IN</sub> = 15V		0.005	1	μΑ
IN(0)	Logical "0" Input Current	$V_{CC} = 15V, V_{IN} = 0V$	-1.0	-0.005		μΑ
сс	Supply Current	V <sub>CC</sub> = 15V, Output Open		0.05	15	μΑ
	Output Leakage					
		$V_{CC} = 4.75V, V_{IN} = V_{CC} - 1.5V$		0.005	5	μA
		V <sub>CC</sub> = 4.75V, V <sub>OUT</sub> = 18V				
CMOS/LPT	TL INTERFACE					
V <sub>IN(1)</sub>	Logical "1" Input Voltage	$V_{CC} = 4.75V$	V <sub>CC</sub> – 1.5V			V
/IN(0)	Logical "0" Input Voltage	$V_{CC} = 4.75V$			0.8	V
	RIVE CURRENT					
		$V_{CC} = 4.75V, V_{IN} = 1V + 0.1 V_{CC}$				
		V <sub>CC</sub> = 4.75V, V <sub>OUT</sub> = 0.5V	2.1	8.0		mA
		V <sub>CC</sub> = 4.75V, V <sub>OUT</sub> = 1.0V	4.2	12.0		mA
		V <sub>CC</sub> = 10V, V <sub>IN</sub> = 2V				
		V <sub>CC</sub> = 10V, V <sub>OUT</sub> = 0.5V	4.2	20		mA
		$V_{CC} = 10V, V_{OUT} = 1V$	8.4	30		mA
	1					1

www.fairchildsemi.com

A -	$T_A = 25^{\circ}C$ , $C_L = 50$ pF, unless otherwise specified							
Symbol	Parameter	Conditions	Min	Тур	Max	Units		
t <sub>pd</sub>	Propagation Delay Time							
	to a Logical "0"							
		$V_{CC} = 5.0V, R = 10k$			150	ns		
		$V_{CC} = 5.0V, R = 10k$ $V_{CC} = 10V, R = 10k$			75	ns		
t <sub>pd</sub>	Propagation Delay Time							
	to a Logical "1"							
		V <sub>CC</sub> = 5.0V (Note 4)			150 + 0.7 RC	ns		
		V <sub>CC</sub> = 5.0V (Note 4) V <sub>CC</sub> = 10V (Note 4)			75 + 0.7 RC	ns		
CIN	Input Capacitance	(Note 5)	İ	5.0		pF		
COUT	Output Capacity	(Note 5)	İ	20		pF		
CPD	Power Dissipation Capacity	(Note 6) Per Buffer		30		pF		


Note 3: AC Parameters are guaranteed by DC correlated testing.

Note 4: "C" used in calculating propagation includes output load capacity ( $C_L$ ) plus device output capacity ( $C_{OUT}$ ).

Note 5: Capacitance is guaranteed by periodic testing.


Note 6: C<sub>PD</sub> determines the no load AC power consumption of any CMOS device. For complete explanation see Family Characteristics Application Note, AN-90. (Assumes outputs are open).

## **Typical Applications**




Note: Can be extended to more than 2 inputs.


#### CMOS or TTL to CMOS at a Higher $\rm V_{CC}$

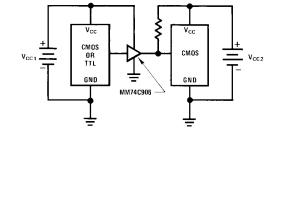

www.fairchildsemi.com

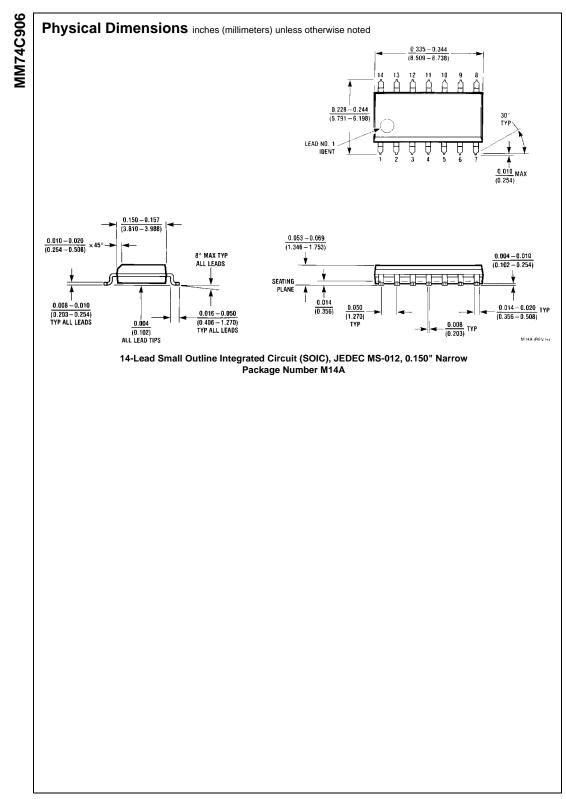

www.fairchildsemi.com

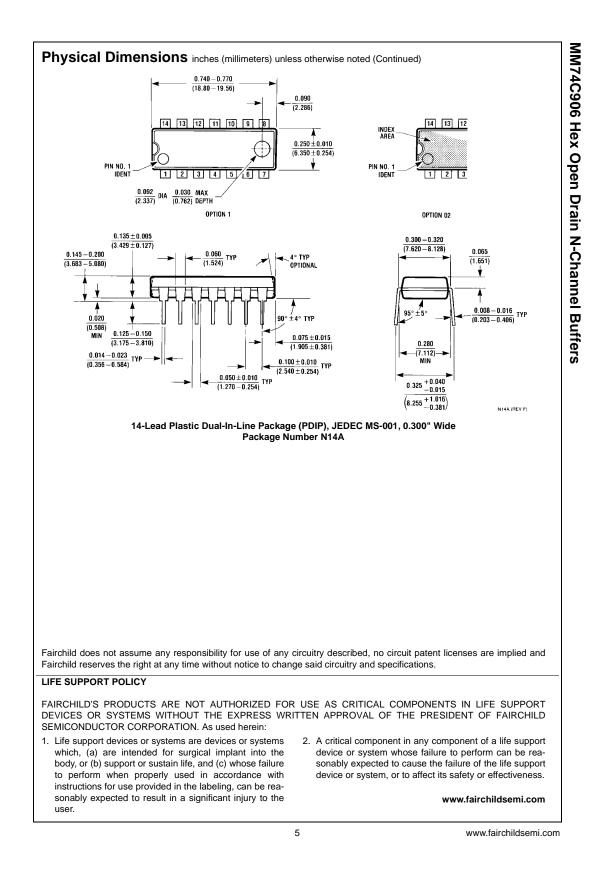

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

www.onsemi.com