

Evaluating the **ADL6012** 2 GHz to 67 GHz, 500 MHz Bandwidth, Envelope Detector

FEATURES

Fully featured evaluation board for the **ADL6012**
Specified up to 67 GHz
3.15 V to 5.25 V operation

EVALUATION KIT CONTENTS

ADL6012-EVALZ evaluation board

EQUIPMENT NEEDED

Analog signal generator up to 67 GHz (E8257D)
High speed oscilloscope (MSOS254A)
DC voltmeter (34401A)
5 V power supply (E3631A)
Differential probe (1131A)

GENERAL DESCRIPTION

The ADL6012-EVALZ provides efficient evaluation of the **ADL6012** 2 GHz to 67 GHz envelope detector. The **ADL6012** has fast rise time and fall time responses, around 1 ns depending on input power levels, with an output envelope bandwidth of 500 MHz. The ADL6012-EVALZ provides the basic connections for the RF input signal and the envelope output voltage. Differential envelope outputs on the ADL6012-EVALZ can be directly connected to a high speed oscilloscope to evaluate the differential envelope tracking capabilities.

For full details on the **ADL6012**, see the **ADL6012** data sheet. Consult the **ADL6012** data sheet in conjunction with this user guide when using the ADL6012-EVALZ evaluation board.

EVALUATION BOARD PHOTOGRAPH

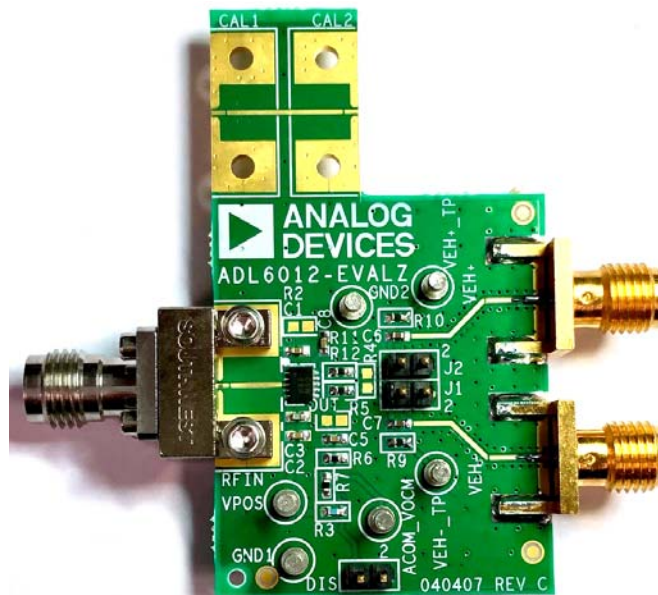


Figure 1.

TABLE OF CONTENTS

Features.....	1	DC Voltmeter	3
Evaluation Kit Contents	1	Evaluation Board Setup Procedure.....	4
Equipment Needed.....	1	DC-Coupled Constant Envelope Output Measurements	4
General Description.....	1	High Speed Pulsed Output Measurements	4
Evaluation Board Photograph	1	AM Output Response Measurements	4
Revision History	2	Evaluation Board Schematic and Artwork	6
Evaluation Board Setup Equipment	3	Ordering Information.....	8
Power Supply	3	Bill of Materials	8
RF Input.....	3		
High Speed Oscilloscope	3		

REVISION HISTORY

6/2020—Revision 0: Initial Version

EVALUATION BOARD SETUP EQUIPMENT

POWER SUPPLY

The ADL6012-EVALZ requires a single 5 V power supply. An external Agilent E3631A power supply is acceptable to use to power the ADL6012-EVALZ with current consumption around 33 mA. The [ADL6012](#) can be disabled with the DIS jumper. Short the jumper to disable the [ADL6012](#).

RF INPUT

The Agilent E8257D analog signal generator is acceptable to use to generate a continuous wave (CW) signal up to 67 GHz and provide the CW signal source to the ADL6012-EVALZ. The RFIN connector on the ADL6012-EVALZ is 1.85 mm, rated up to 67 GHz, and can be directly connected to the Agilent E8257D signal generator.

HIGH SPEED OSCILLOSCOPE

The Keysight MSOS254A high speed oscilloscope is acceptable to use to accurately measure the rise and fall times of the [ADL6012](#). The Keysight MSOS254A oscilloscope must have a bandwidth of 2 GHz or higher to accurately measure the [ADL6012](#) output response. The amplitude modulation (AM) signal and the pulse modulated RF signal can be measured with a differential probe at the envelope outputs with the high speed oscilloscope (see Figure 3). The Agilent 1331A differential probe is acceptable to use. If a differential probe is not available, connect the VEH– and VEH+ Subminiature Version A (SMA) connectors to the Keysight MSOS254A oscilloscope with 50 Ω , impedance controlled RF cables terminated with 50 Ω at the oscilloscope inputs (see Figure 4). Ensure that both RF cables are less than 2 inches in length to minimize reflections.

DC VOLTMETER

The Agilent 34401A dc voltmeter is acceptable to use to measure the constant envelope voltage across the VEH+ and VEH– test points. This voltage is the differential output voltage measured when the RF input is a CW with a constant envelope.

EVALUATION BOARD SETUP PROCEDURE

The ADL6012-EVALZ provides the basic connections to evaluate the functionality of the [ADL6012](#) envelope detector (see Figure 2).

To set up the ADL6012-EVALZ to evaluate the [ADL6012](#), take the following steps:

1. Connect the E3631A negative terminal ground turret to the GND1 turret on the ADL6012-EVALZ.
2. Connect the E3631A positive 5V terminal to the ADL6012-EVALZ VPOS turret.
3. Set the E3631A power supply to 5 V and set the current limit to 100 mA.
4. Turn on the E3631A 5 V power supply.
5. Connect the E8257D 67 GHz signal generator to the 1.8 mm edge RFIN connector on the ADL6012-EVALZ. Set the Agilent E8257D frequency between 2 GHz and 67 GHz and adjust the signal level according to the detection range of the [ADL6012](#).
6. Measure the differential envelope output voltage across the VEH+ and VEH- turrets on the ADL6012-EVALZ using either the two output turrets or the SMA connectors, depending on the type of measurement.

DC-COUPLED CONSTANT ENVELOPE OUTPUT MEASUREMENTS

Figure 2 shows the connections required to measure the differential, constant envelope outputs (the dc voltage) across the VEH+ and VEH- turrets. The Agilent 34401A voltmeter is used to take the dc output measurements as the RF input power varies across the [ADL6012](#) detection range.

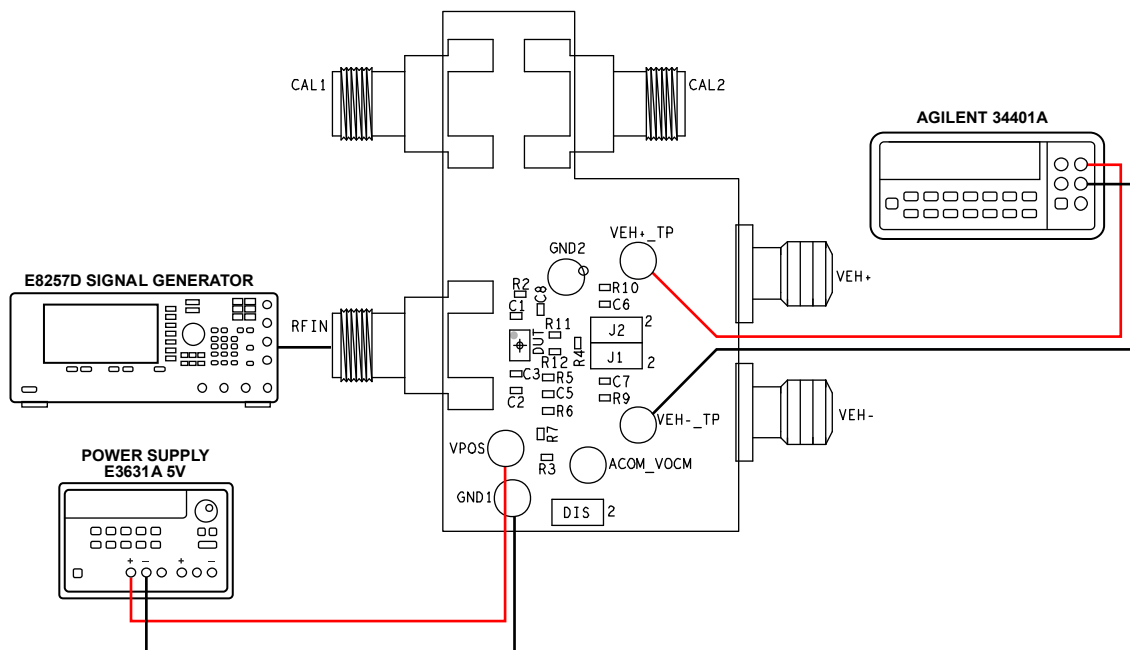


Figure 2. Typical [ADL6012](#) DC Measurement Setup

HIGH SPEED PULSED OUTPUT MEASUREMENTS

For high speed pulse response measurements, use the Agilent 1131A differential probe to measure the envelope output response. See Figure 3 for the measurement points used to make the connections to the ADL6012-EVALZ. The [ADL6012](#) is designed to drive a 100 Ω differential load. Place a 100 Ω resistor (R4) on the ADL6012-EVALZ to evaluate the [ADL6012](#) output response to the differential load. Each envelope output has a common-mode voltage of 2.5 V with the VPOS voltage at 5 V.

AM OUTPUT RESPONSE MEASUREMENTS

For AM output response measurements, the envelope outputs can be connected to the Keysight MSOS254A oscilloscope with a 50 Ω termination on each envelope output (see Figure 4). Each envelope output on VEH+ and VEH- is ac-coupled on the ADL6012-EVALZ. Use 50 Ω cables to connect the ADL6012-EVALZ to the Keysight MSOS254A oscilloscope. Keep the output cables as short as possible and at equal lengths to minimize reflections from the load. Both the positive peaks and negative peaks of the envelope are measured on each oscilloscope channel.

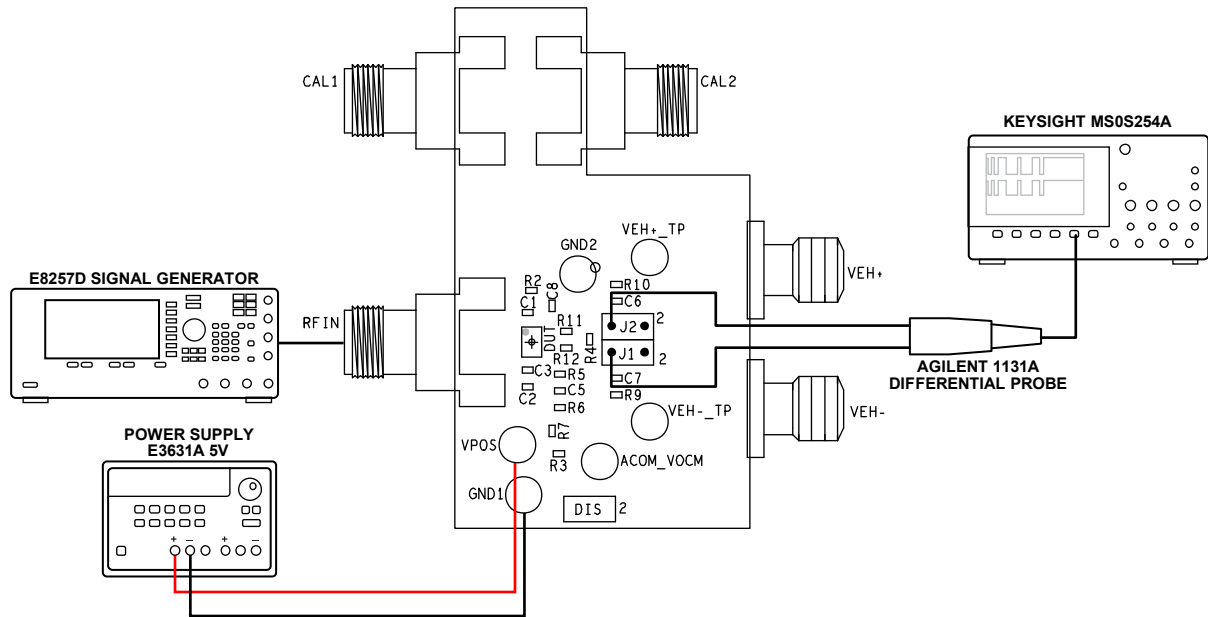


Figure 3. ADL6012 Envelope Measurement Using Differential Probe

22021-003

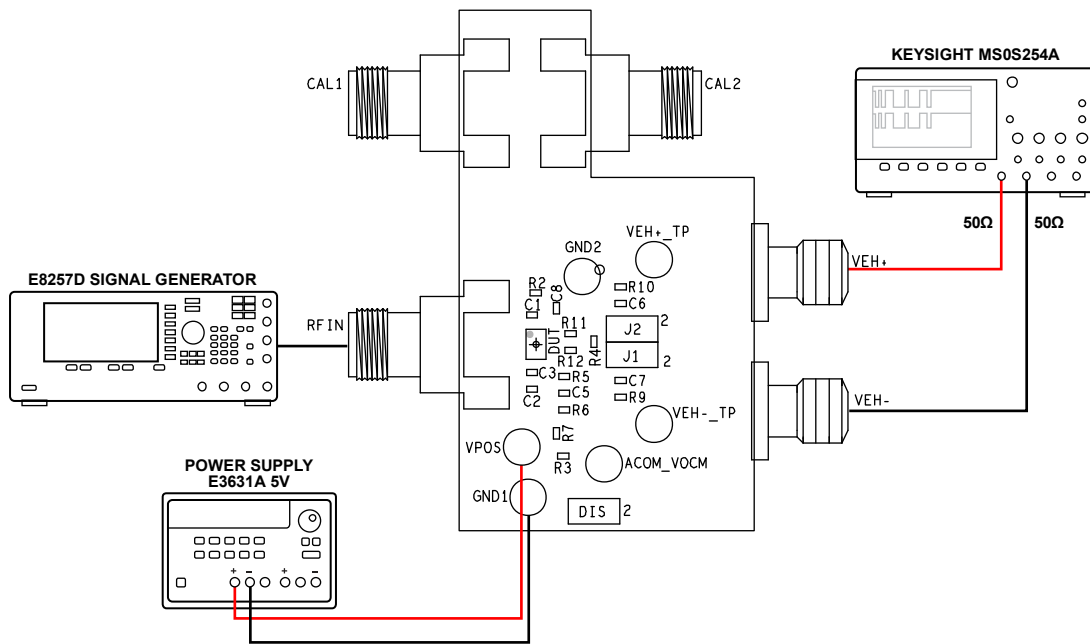


Figure 4. Differential Envelope Output Measurement for AM or Pulsed RF Response

22021-004

EVALUATION BOARD SCHEMATIC AND ARTWORK

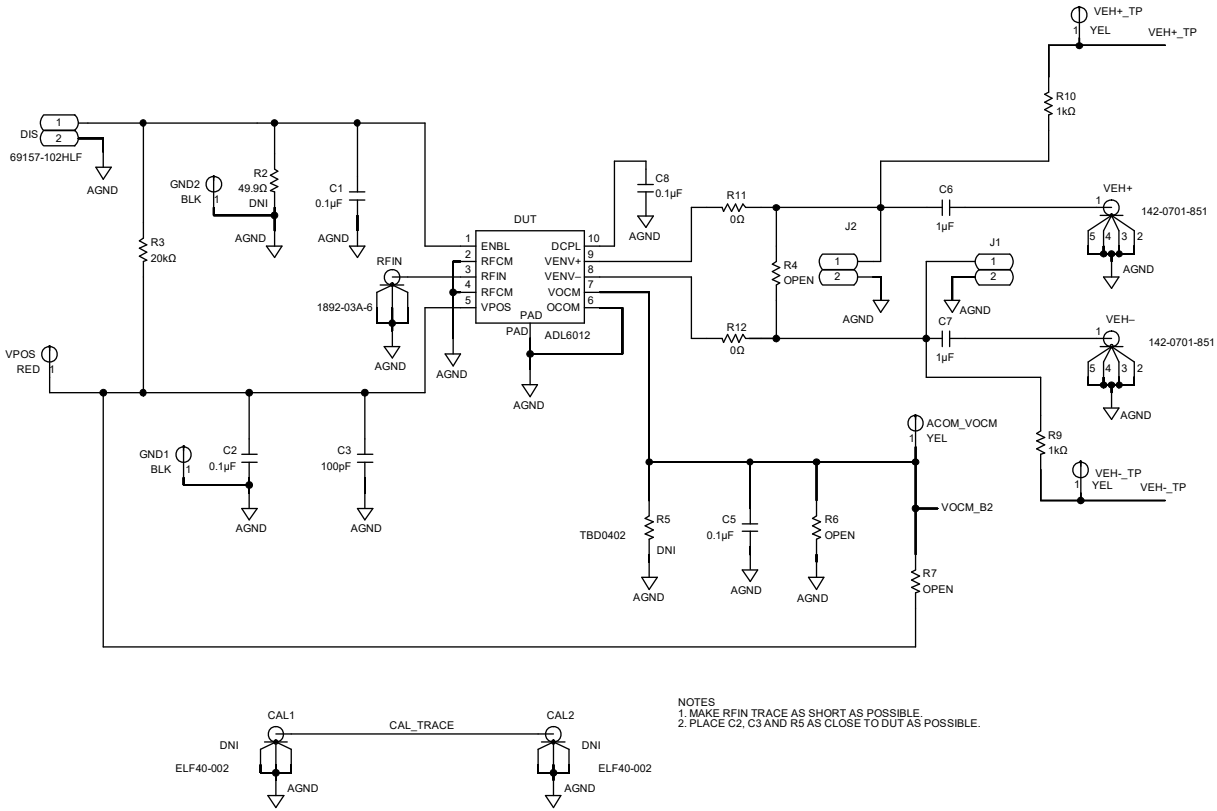


Figure 5. ADL6012-EVALZ Schematic

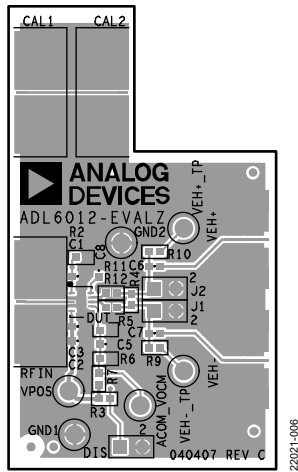


Figure 6. ADL6012-EVALZ, Top Layer

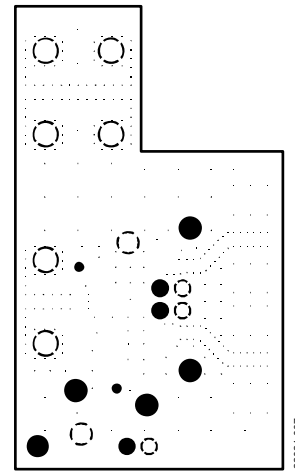


Figure 7. ADL6012-EVALZ, Layer 2


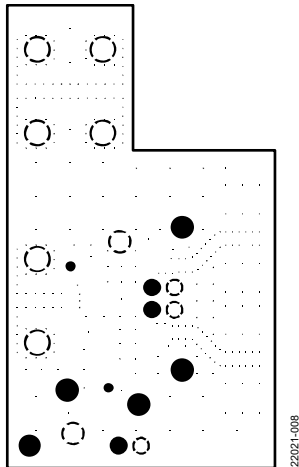


Figure 8. ADL6012-EVALZ, Layer 3

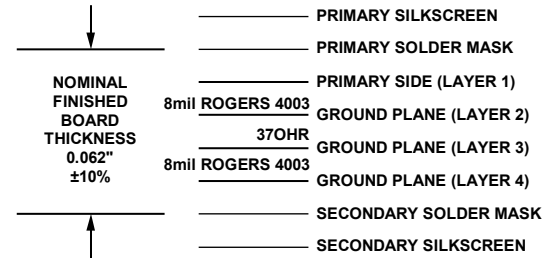

CHARACTERISTIC IMPEDANCE = $50\Omega \pm 10\%$
 ARTWORK LINE WIDTH FOR
 IMPEDANCE-CONTROLLED LINES = 0.0135"

Figure 10. ADL6012-EVALZ Stack Up

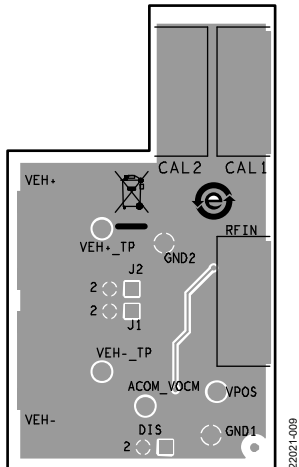


Figure 9. ADL6012-EVALZ, Bottom Layer

ORDERING INFORMATION

BILL OF MATERIALS

Table 1.

Qty	Designator	Description	Manufacturer	Part Number
1	C1	Bypass capacitor to enable 0.1 μ F	PPI	0402BB104KW500
1	C2	Supply bypass capacitor, use microwave grade, place as close to the VPOS pin as possible, 0.1 μ F	PPI	0402BB104KW500
1	C3	Supply bypass capacitor, use microwave grade, place as close to the VPOS pin as possible, 100 pF	Murata	GCM1555C1H101JA16D
2	C5, C8	Bypass capacitor for common-mode voltage, place as close to the VOVM pin as possible, 0.1 μ F	PPI	0402BB104KW500
2	C6, C7	AC coupling capacitors for envelope outputs, 1 μ F	Yageo	CC0402MRX5R6BB105
2	CAL1, CAL2	Connectors, placement for calibration trace, not installed		
1	CAL_TRACE	RF trace for input level calibration		
1	R2	Enable termination resistor, open, 49.9 Ω	Panasonic	ERJ2RKF49R9X
1	R3	Enable pull-up resistor to VPOS pin, 20 k Ω	Panasonic	ERJ2RKF2002X
1	R4	Differential output load resistor, open, not installed		
3	R5 to R7	Resistor divider network for output common-mode voltage, open, not installed		
2	R9, R10	Series envelope output resistors, 1 k Ω	Panasonic	ERJ2RKF1001X
2	R11, R12	0 Ω resistors	Panasonic	ERJ2GE0R00X
1	RFIN	1.85 mm edge mount connector, Southwest	Southwest	1892-03A-6
2	VEH+, VEH-	Envelope output SMA connectors, end launch, 50 Ω	Cinch	142-0701-851
1	DIS	Disable jumper, short to ground to disable the device	Würth	61300211121
1	ACOM_VOVM	Analog input to control the common-mode voltage output, yellow	Components Corporation	TP-104-01-04
1	VEH+_TP	Test point connected to VENV+, yellow	Components Corporation	TP-104-01-04
1	VEH-_TP	Test point connected to VENV-, yellow	Components Corporation	TP-104-01-04
2	GND1, GND2	Turrets connected to PCB ground, black	Mill-Max	2308-2-00-80-00-00-07-0
1	VPOS	Power supply turret connected to VPOS pin, red	Components Corporation	TP-104-01-04
1	DUT	ADL6012 IC	Analog Devices, Inc.	ADL6012ACPZN-R7
2	J1, J2	Jumper headers, can be used to connect to active probe	Würth	61300211121

NOTES

**ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

©2020 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
UG22021-6/20(0)



www.analog.com