

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 544

MICROPOWER STEP-DOWN SWITCHING REGULATOR IN THINSOT

LT1934ES6

DESCRIPTION

Demonstration circuit 544 features the LT1934 and LT1934-1 wide input range micro power step-down switching regulators. There are two switching regulator circuits in DC544, the LT1934ES6 circuit designed to convert 4.5V~34V input to 3.3V at 250mA output and the LT1934ES6-1 circuit designed for the same input and output voltage at 50mA load current.

Each circuit has two jumpers for testing SHDN mode operation and selecting the output voltage setting (3.3V or 5V). Placing the jumper (JP1 & JP3) to "RUN" enables LT1934 step down converter operation and placing the jumper to "SHDN" disables the LT1934 and the circuit will turn off. The output voltage jumper (JP2 & JP4) changes the feedback resistor value to change

the output voltage. Placing the jumper at "3.3V" sets the output to 3.3V and placing the jumper at "5V" sets the output voltage to 5V. For 5V output operation, the input voltage range needs to be 6.5V ~34V.

The aluminum electrolytic input capacitor is used at the input for damping the voltage overshoot ringing caused by a low impedance voltage source and a long input power cable (LC tank). See Application Note 88 for more details.

Design files for this circuit board are available. Call the LTC factory.

Table 1. Performance Summary

| PARAMETER | CONDITION | VALUE |
|------------------------|--|--------|
| Minimum Input Voltage | For 3.3V output, 6.5V Min. for 5V output | 4.5V |
| Maximum Input Voltage | | 34V |
| Maximum Output Current | 4.5V~34V input to 3.3V output | 250mA |
| V _{OUT REG} | | ≤ 60mV |

QUICK START PROCEDURE

UPPER CIRCUIT (BOOST CONVERTER)

Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Connect the input power supply (set at 7V initially) to the **V_{in}** and **GND** pins.
2. Turn on the input power supply and observe the output voltage. The output voltage should read **3.3V ± 0.06V**.
3. Test the SHDN function by moving the JP1 jumper from **RUN** to **SHDN** (turn on the load box preset at **250mA** for a few seconds to discharge the output capacitor). The output should read **0V**.
4. Return the jumper back to **RUN**. The output voltage should now read **3.3V ± 0.06V**.

5. Turn on the load box preset at **250mA**. The input current should read **≤ 150mA** and the output voltage should be **3.3V ± 0.06V**.
6. Slowly change the input power supply voltage from **4.5V** to **34V** while observing the output voltage. The output should stay within **3.3V ± 0.06V**.
7. Observe the input current at 34V, it should read **≤ 35mA**.
8. Change the input power supply voltage back to **7V** and check the output ripple using the oscilloscope. The output ripple should not be higher than **50mV**. Also check the switching frequency. The period should be **3uS**.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 544 MICROPOWER STEP-DOWN SWITCHING REGULATOR IN THINSOT

LOWER CIRCUIT (BOOST CONVERTER)

Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Connect the input power supply (set at 7V initially) to the **Vin** and **GND** pins.
2. Turn on the input power supply and observe the output voltage. The output voltage should read $3.3V \pm 0.06V$.
3. Test the SHDN function by moving the JP1 jumper from **RUN** to **SHDN** (turn on the load box preset at **50mA** for a few seconds to discharge the output capacitor). The output should read **0V**.
4. Return the jumper back to **RUN**. The output voltage should read $3.3V \pm 0.06V$.

5. Turn on the load box preset at **50mA**. The input current should read $\geq 30mA$ and the output voltage should be $3.3V \pm 0.06V$.
6. Slowly change the input power supply voltage from **4.5V** to **34V** while observing the output voltage. The output should stay within $3.3V \pm 0.06V$.
7. Observe the input current at 34V, it should read $\geq 10mA$.
8. Change the input power supply voltage back to **7V** and check the output ripple using the oscilloscope. The output ripple should not be higher than **40mV**. Also check the switching frequency. The period should be **3uS**.


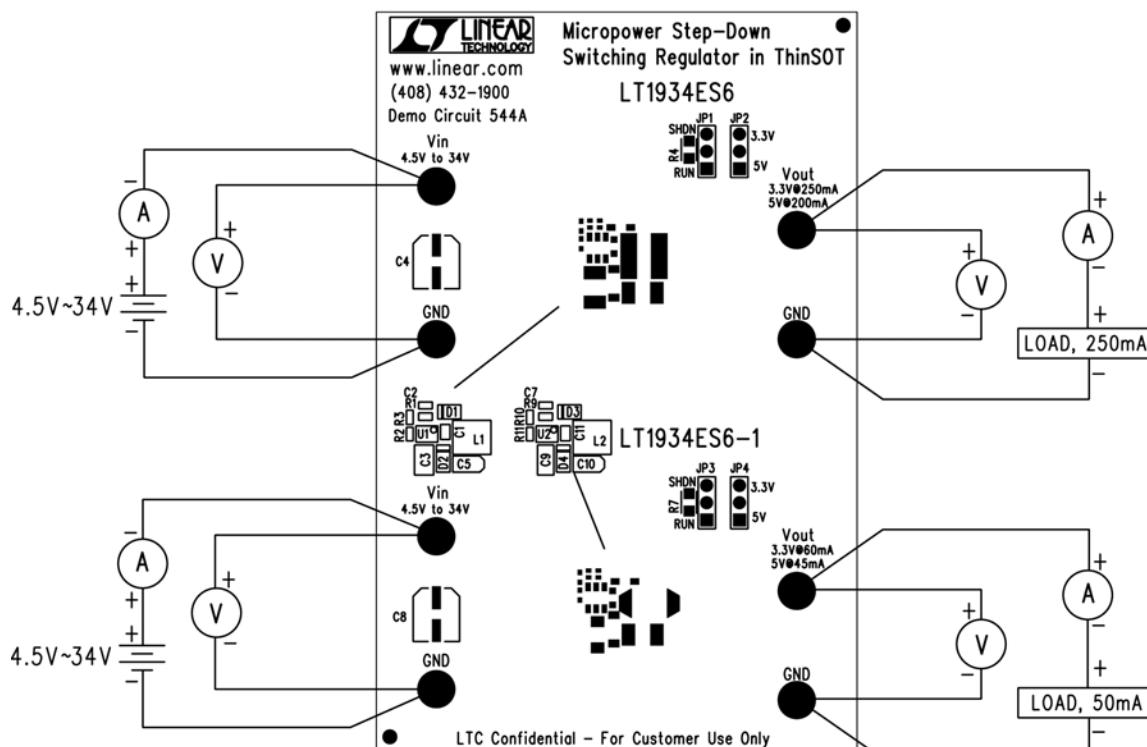




Figure 1. Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 544

MICROPOWER STEP-DOWN SWITCHING REGULATOR IN THINSOT

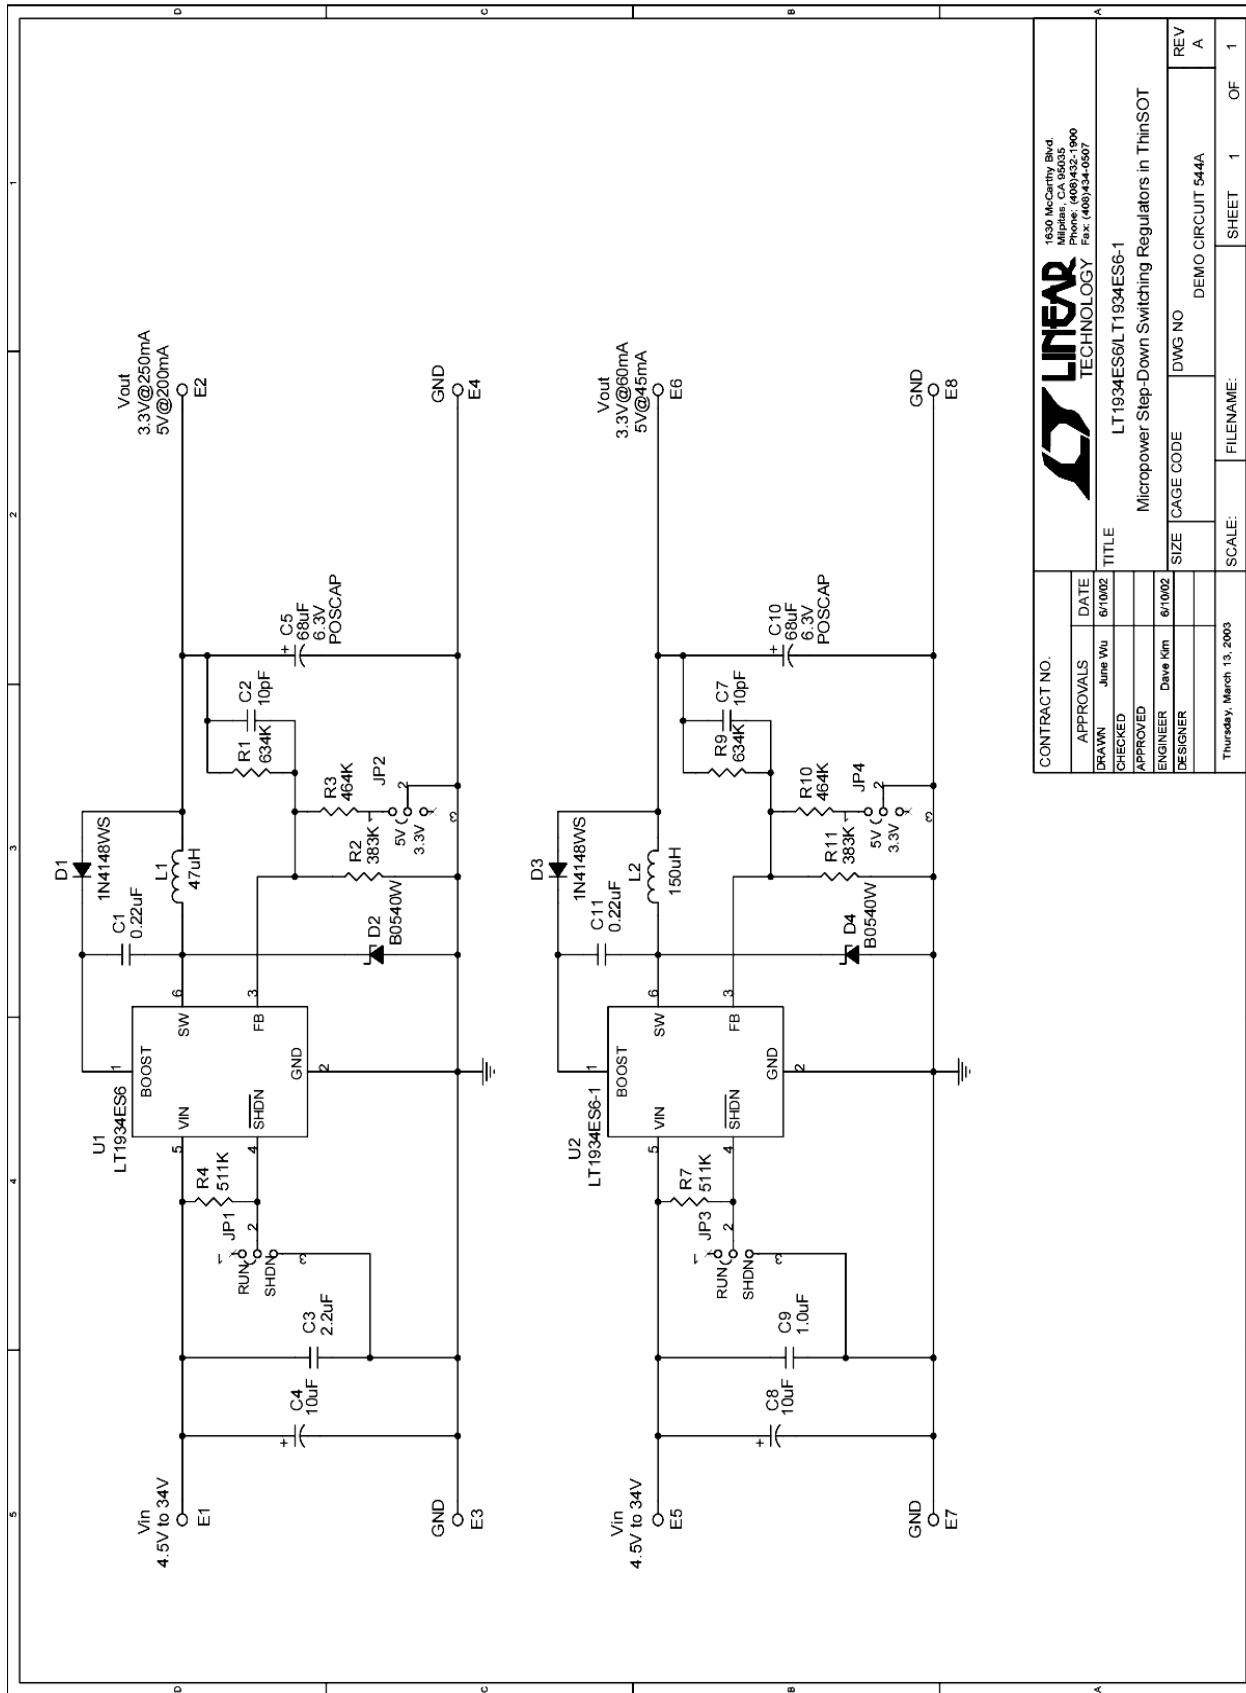

| | | | |
|--------------|-------------|--------|--|
| CONTRACT NO. | LT1934ES6-1 | | |
| APPROVALS | DATE | 6/1/02 | TITLE |
| DRAWN | JUNE WU | | LT1934ES6-1 |
| CHECKED | | | Micropower Step-Down Switching Regulators in ThinSOT |
| APPROVED | | | |
| ENGINEER | Dave Kim | 6/1/02 | SIZE |
| DESIGNER | | | CAGE CODE |
| | | | DWG NO |
| | | | DEMO CIRCUIT 544A |
| | | | REV A |
| | | | SHEET 1 OF 1 |

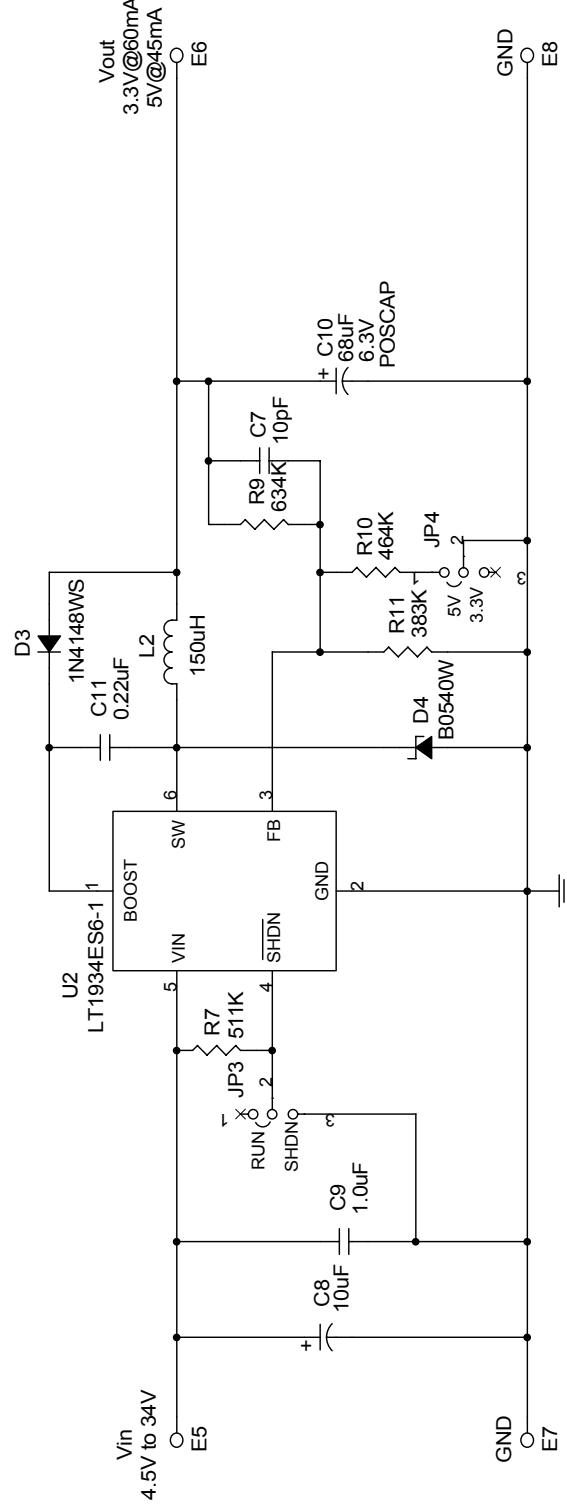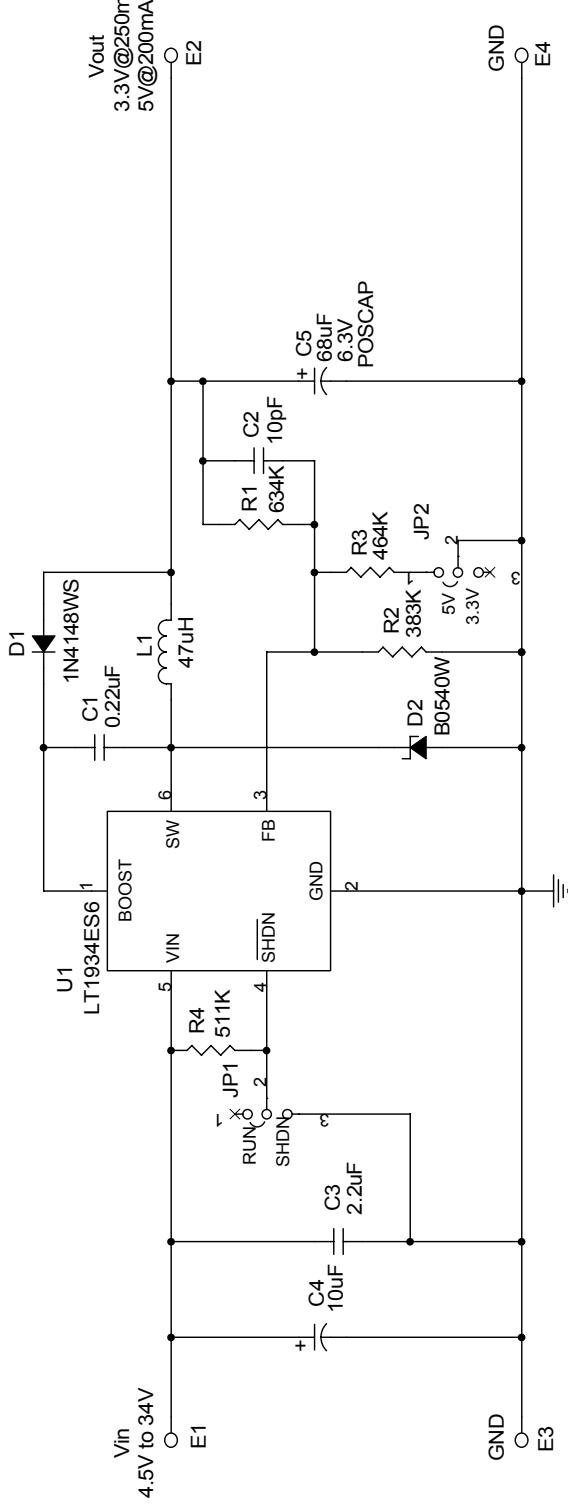

1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408)432-1900
Fax: (408)434-0507

LINEAR TECHNOLOGY

A

LT1934ES6/LT1934ES6-1

B

Micropower Step-Down Switching Regulators in ThinSOT

| CONTRACT NO. | APPROVALS | DATE | TITLE |
|--------------|-------------------|---------|-----------------------|
| | DRAWN June Wu | 6/10/02 | LT1934ES6/LT1934ES6-1 |
| | CHECKED | | |
| | APPROVED | | |
| | ENGINEER Dave Kim | 6/10/02 | SIZE |
| | DESIGNER | | CAGE CODE |
| | | | DWG NO |
| | | | DEMO CIRCUIT 544A |
| | | | REV A |
| | | | SHEET 1 OF 1 |

Thursday, December 12, 2002

SCALE: FILENAME:

3

4

5

Linear Technology Corporation

LT1934ES6/LT1934ES6-1

Bill Of Material
Demo Bd. #544A

6/17/2005

| Item | Qty | Reference | Part Description | Manufacture / Part # |
|------|-----|-----------|--|----------------------------|
| 1 | 2 | C11,C1 | CAP., X7R, 0.22uF, 10V, 20% 0603 | AVX, 0603ZC224MAT2A |
| 2 | 2 | C2,C7 | CAP., C0G, 10pF, 50V, 10% 0402 | AVX, 04025A100KAT2A |
| 3 | 1 | C3 | CAP., X5R, 2.2uF, 35V, 20% 1210 | Taiyo Yuden, GMK325BJ225MN |
| 4 | 1 | C9 | CAP., X5R, 1.0uF, 35V, 20% 1206 | Taiyo Yuden, GMK316BJ105ML |
| 5 | 2 | C4,C8 | CAP., Aluminum, 10uF, 35V 5X6.0 | SANYO, 35CV10AX |
| 6 | 2 | C5,C10 | CAP., POSCAP, 68uF, 6.3V B2 SIZE | SANYO, 6TPB68M |
| 7 | 2 | D1,D3 | DIODE, 1N4148WS, SOD-323 | DIODES INC., 1N4148WS-7 |
| 8 | 2 | D2,D4 | Schottky Barrier REC., B0540W, SOD-123 | DIODES INC., B0540W-7 |
| 9 | 8 | E1-E8 | TESTPOINT, TURRET, .094" | MILL-MAX, 2501-2 |
| 10 | 4 | JP1-JP4 | 0.079 SINGLE ROW HEADER, 3PIN | COMM CON, 2802S-03-G1 |
| 11 | 4 | JP1-JP4 | SHUNT, | COMM CON, CC1J2MM-138G |
| 12 | 1 | L1 | INDUCTOR, 47uH, CDH4D28 | SUMIDA, CDRH4D28-470 |
| 13 | 1 | L2 | INDUCTOR, 150uH, DO1608 | COILCRAFT, DO1608C-154 |
| 14 | 2 | R1,R9 | RES., CHIP, 634K, 1/16W, 1% 0402 | AAC, CR05-6343FM |
| 15 | 2 | R2,R11 | RES., CHIP, 383K, 1/16W, 1% 0402 | AAC, CR05-3833FM |
| 16 | 2 | R3,R10 | RES., CHIP, 464K, 1/16W, 1% 0402 | AAC, CR05-4643FM |
| 17 | 2 | R7,R4 | RES., CHIP, 511K, 1/10W, 1% 0805 | AAC, CR10-5113FM |
| 18 | 1 | U1 | I.C. LT1934ES6, Thin SOT23-6 | LINEAR, LT1934ES6 |
| 19 | 1 | U2 | I.C. LT1934ES6-1, Thin SOT23-6 | LINEAR, LT1934ES6-1 |
| 20 | 1 | | PRINTED CIRCUIT BOARD | DEMO CIRCUIT #544A |