



MIC4100/1/3/4

Family Evaluation Board

General Description

The MIC4100, MIC4101, MIC4103 and MIC4104 are a family of high-frequency, 100V MOSFET drivers. Each part contains a high-side and low-side driver and will drive many switching power supply topologies. Refer to the MIC4100/1 and MIC4103/4 specifications for detailed information.

This evaluation board provides a platform for evaluating any of the drivers. The evaluation board schematic is shown in Figure 1. A 1uf, 100V ceramic capacitor is connected between the "HV Supply Input" and "Ground" terminals and provides high frequency decoupling on the board. 0.1uf capacitors are used for decoupling the VDD and HB pins of the driver. 100V, N-Channel, SO-8 FETs are included with the board.


Data sheets and support documentation can be found on Micrel's web site at www.micrel.com.

Specifications

- Control IC (refer to board for part ID)..... MIC4100/1 or MIC4103/4
- Power Supply Topology Drives an on-board MOSFET Bridge
- Recommended "HV Supply" terminal voltage.... 8V to 100V
- Maximum recommended "VDD" terminal voltage..... 16V
- Maximum "High Side FET Source" terminal voltage.... 100V
- Maximum HI/LI/LS terminal voltageV_{DD}

Precautions

The evaluation board does not have input reverse polarity protection. Applying a negative voltage at the "HV Supply" or "VDD" terminals (with respect to the GND terminal) may permanently damage the components on the board. The voltage on the HI and LI terminals should not exceed the "VDD" terminal voltage.

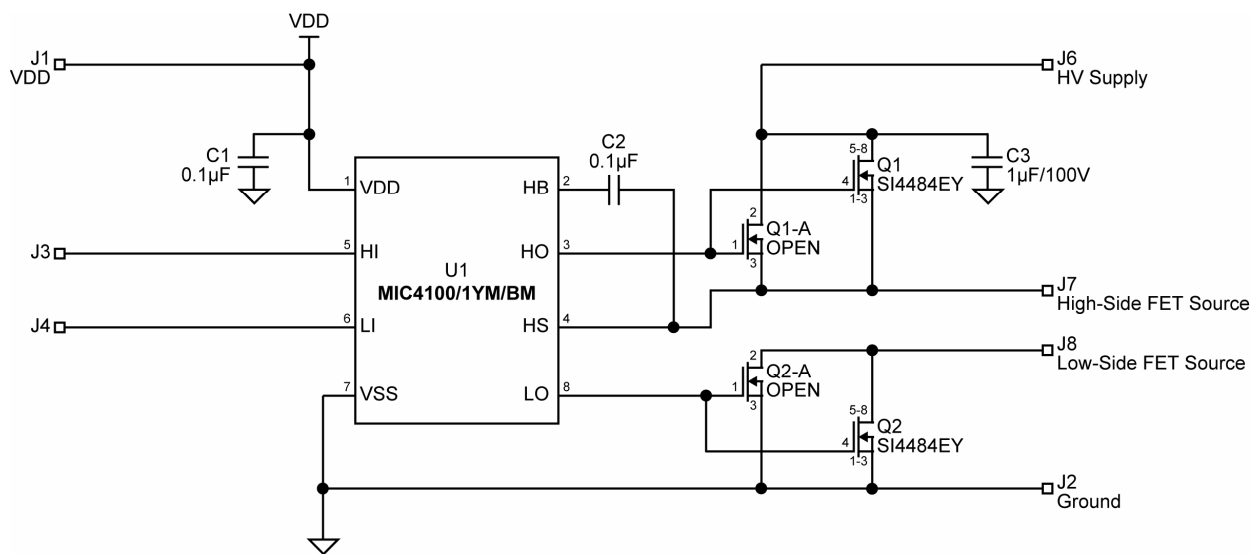

Xxxxx is a trademark of Micrel, Inc.
Xxxxx is a registered trademark of Micrel, Inc.

Micrel Inc. • 2180 Fortune Drive • San Jose, CA 95131 • USA • tel +1 (408) 944-0800 • fax + 1 (408) 474-1000 • <http://www.micrel.com>

September 2007

M9999-092707-A
hbwhelp@micrel.com or (408) 955-1690

Requirements

At a minimum, the evaluation board requires an 8V to 16V supply to power the MIC410x driver. Another supply (up to 100V) may be used to power the MOSFETs at the “HV Supply” terminal. A pulse generator or the output of a PWM control IC may be connected to the HI and/or LI terminals. The board can be used with either of the 4 driver IC's.

MIC4100/3: The HI and LI inputs have a CMOS compatible threshold. The high-side and low-side drivers are independently controlled by the HI and LI inputs. The inputs may be connected to separate PWM sources or can be connected together.

MIC4101/4: Same as the MIC4100/3 but the inputs have a TTL compatible threshold.

Getting Started

The simplest way to observe driver operation is to connect the “High Side Fet Source” terminal to ground (or any voltage potential under 100V) and apply a PWM signal to the “HI” and/or “LI” input terminals. DC and AC parameters can be measured in this configuration. The included SO-8 MOSFETs can be removed or replaced with different FETs. D²PAK locations are provided on the back of the board.

The source terminal of the high-side FET and drain terminal of the low-side FET are floating and accessible through the board terminals. This allows the board to be used with different power topologies such as the synchronous buck, half-bridge, full-bridge or two transistor forward converter.


Bill of Materials


Item	Part Number	Manufacturer	Description	Qty.
U1	MIC4100BM	Micrel.Inc ⁽¹⁾	Buck controller	1
	MIC4101BM	Micrel.Inc ⁽¹⁾		OR
	MIC4103BM	Micrel.Inc ⁽¹⁾		OR
	MIC4104BM	Micrel.Inc ⁽¹⁾		OR
Q1,Q2	Si4484EY	Vishay/Siliconix ⁽²⁾	100V N-channel MOSFET	2
Q1A, Q2A		Vishay/Siliconix ⁽²⁾	open location for D2PAK FETs	0
C1, C2	VJ0603Y104KXXAT	Vishay ⁽²⁾	0.1uf/25V, X7R ceramic cap 0603 size	2
C3	C4532X7R2A105M	TDK ⁽³⁾	1uf, 100V, ceramic, X7R	1
	C3225X7R2A105M.	TDK ⁽³⁾		OR
	GRM55DR72A105KA01B	MuRata ⁽⁴⁾		OR

Notes:

- 1. Micrel Inc.: 408-944-0800
- 2. Vishay Corp.: 206-452-5664
- 3. TDK: 562-596-1212
- 4. MuRata: 949-916-4000

Board layout

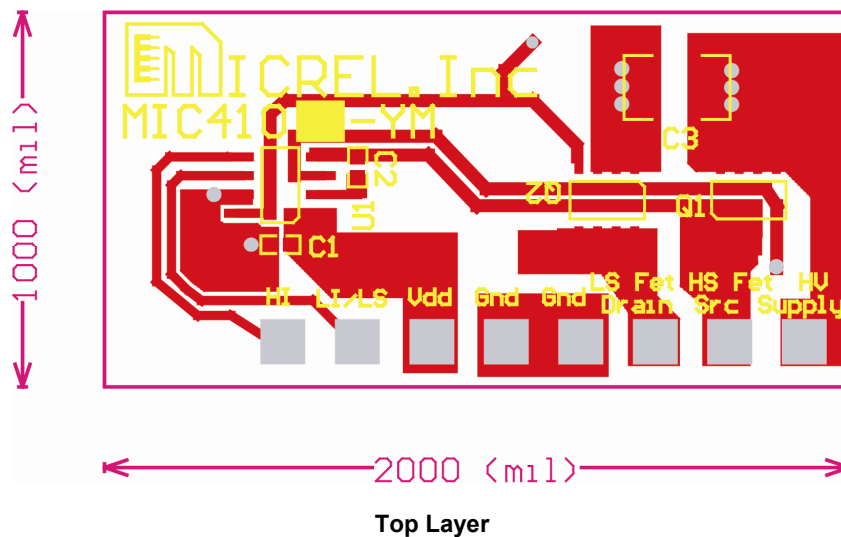

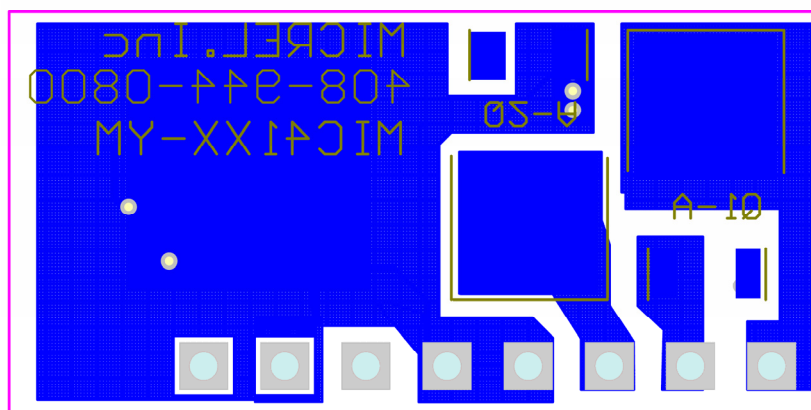

Bottom Layer

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.