

**Sensitive Gate
Silicon Controlled Rectifiers
Reverse Blocking Thyristors**

**SCRs
12 AMPERES RMS
600 VOLTS**


FEATURES

- Blocking Voltage to 600 Volts
- On-State Current Rating of 12 Amperes RMS at 80°C
- Rugged, Economical TO220AB Package
- Glass Passivated Junctions for Reliability and Uniformity
- Minimum and Maximum Values of IGT, VGT and IH Specified for Ease of Design
- High Immunity to dv/dt - 100 V/msec Minimum at 125°C
- Pb-Free Package

MECHANICAL DATA

- Case: Molded plastic
- Weight: 0.07 ounces, 2.0 grams

TO-220AB

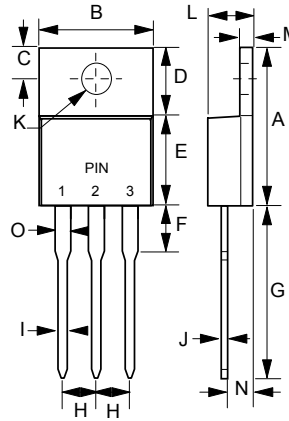

TO-220AB		
DIM.	MIN.	MAX.
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	8.26	9.28
F	-	6.35
G	12.70	14.73
H	2.29	2.79
I	0.51	1.14
J	0.40	0.67
K	3.53 ∅	4.09 ∅
L	3.56	4.83
M	1.14	1.40
N	2.03	2.92
O	1.17	1.37

All Dimensions in millimeter

PIN ASSIGNMENT	
1	Cathode
2	Anode
3	Gate
4	Anode

MAXIMUM RATINGS (Tj= 25°C unless otherwise noticed)

Rating	Symbol	Value	Unit
Peak Repetitive Off- State Voltage (Tj= -40 to 125°C, Sine Wave, 50 to 60 Hz; Gate Open)	V _{DRM} , V _{RRM}	600	Volts
On-State RMS Current (180° Conduction Angles, Tc=80°C)	I _{T(RMS)}	12	Amp
Peak Non-Repetitive Surge Current (1/2 Cycle, Sine Wave 60 Hz, Tj = 25°C) (1/2 Cycle, Sine Wave 50 Hz, Tj = 25°C)	I _{TSM}	125 120	Amp
Circuit Fusing Consideration (t = 8.3 ms) (t = 10 ms)	I ² t	64 72	A ² s
Forward Peak Gate Power (Pulse Width ≤ 1.0us, Tj = 80°C)	P _{GM}	5.0	Watt
Forward Average Gate Power (t=8.3ms, Tc = 80°C)	P _{G(AV)}	0.5	Watt
Forward Peak Gate Current (Pulse Width ≤ 1.0us, Tc=80°C)	I _{GM}	2.0	Amp
Operating Junction Temperature Range	T _J	-40 to +125	°C
Storage Temperature Range	T _{stg}	-40 to +150	°C

Notice: (1) V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded

REV. 11, Dec-2010, KTXC01

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance - Junction to Case - Junction to Ambient	RthJC RthJA	2.2 62.5	°C/W
Maximum Lead Temperature for Soldering Purposes 1/8" from Case for 10 Seconds	TL	260	°C

ELECTRICAL CHARACTERISTICS (T_J=25 °C unless otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Peak Repetitive Forward or Reverse Blocking Current (V _D =Rated V _{DRM} and V _{RRM} ; Gate Open)	T _J =25°C T _J =125°C	I _{DRM} I _{RRM}	--- ---	---	10 2.0	µA mA
--	---	--------------------------------------	------------	-----	-----------	----------

ON CHARACTERISTICS

Gate Trigger Current (V _D = 12 V; R _L =100 Ohms)	IGT	2.0	8.0	15	mA
Holding Current (V _D = 12 V, Gate Open, Initiating Current = 200 mA)	I _H	4.0	20	40	mA
Latch Current (V _D =12V,I _G = 20mA)	I _L	6.0	25	60	mA
Gate Trigger Voltage (V _D = 12 V; R _L = 100 Ohms)	V _{GT}	0.5	0.65	1.0	Volts
Peak Forward On-State Voltage (I _{TM} = 24 A Peak @T _p ≤2.0 ms, Duty Cycle ≤ 2%)	V _{TM}	---	---	2.2	Volts

DYNAMIC CHARACTERISTICS

Critical Rate of Rise of Off-State Voltage (V _D =Rated V _{DRM} ,Exponential Waveform, Gate Open,T _J =125°C)	dv/dt	100	250	---	V/us
Repetitive Critical Rate of Rise of On-state Current I _{PK} =50A,P _w =40 usec,di/dt=1A/usec,I _{gt} =50mA	di/dt	---	---	50	A/us

Symbol	Parameter
V_{DRM}	Peak Repetitive Off State Forward Voltage
I_{DRM}	Peak Forward Blocking Current
V_{RRM}	Peak Repetitive Off State Reverse Voltage
I_{RRM}	Peak Reverse Blocking Current
V_{TM}	Peak On State Voltage
I_H	Holding Current

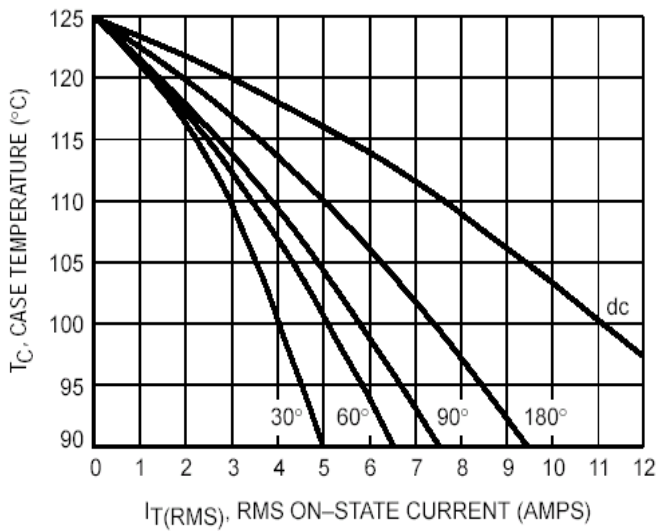
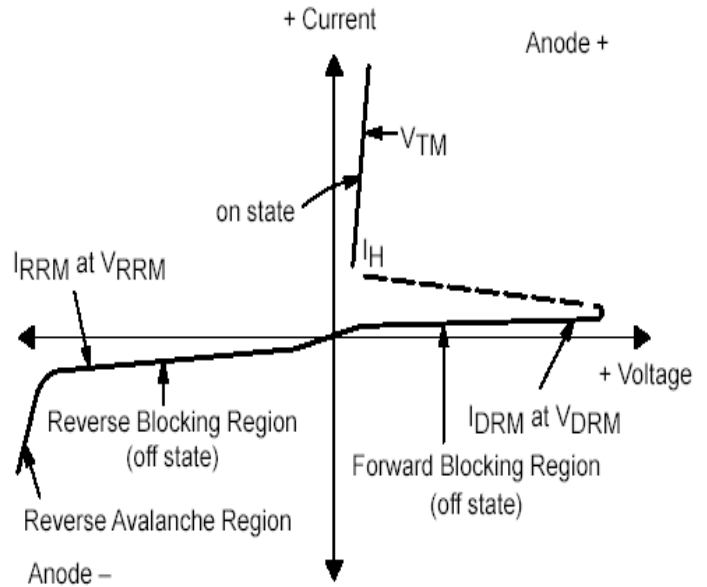


Figure 1. Typical RMS Current Derating

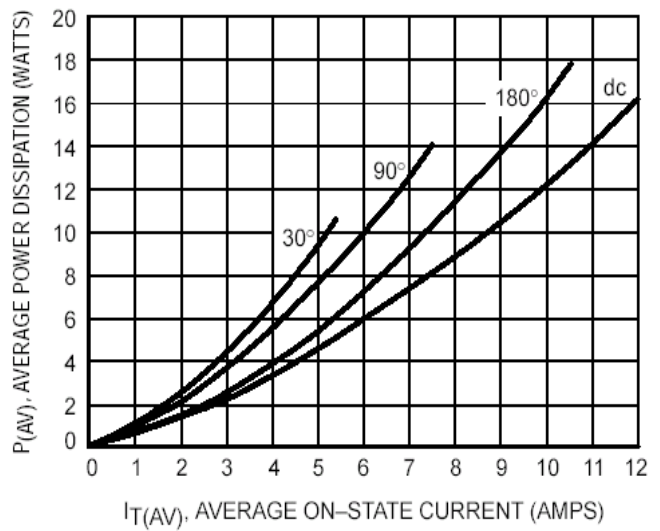


Figure 2. On-State Power Dissipation

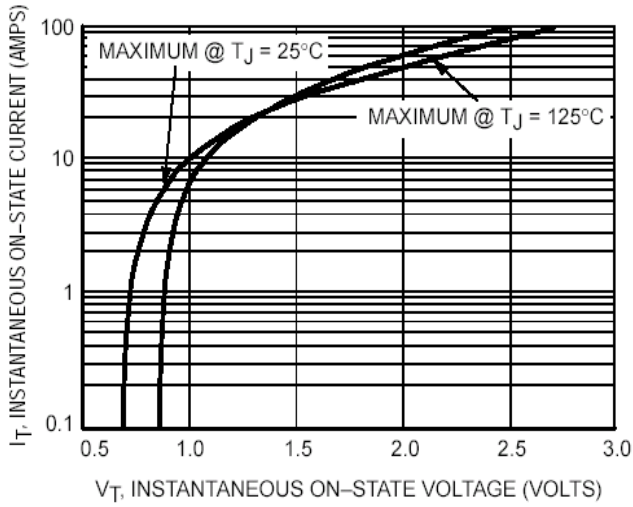


Figure 3. Typical On-State Characteristics

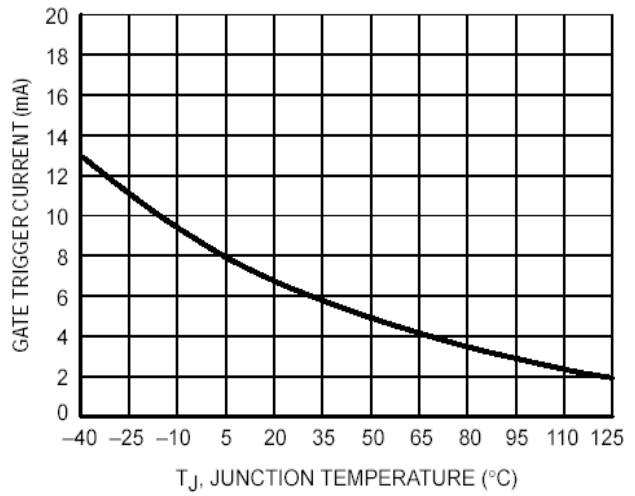


Figure 4. Typical Gate Trigger Current versus Junction Temperature

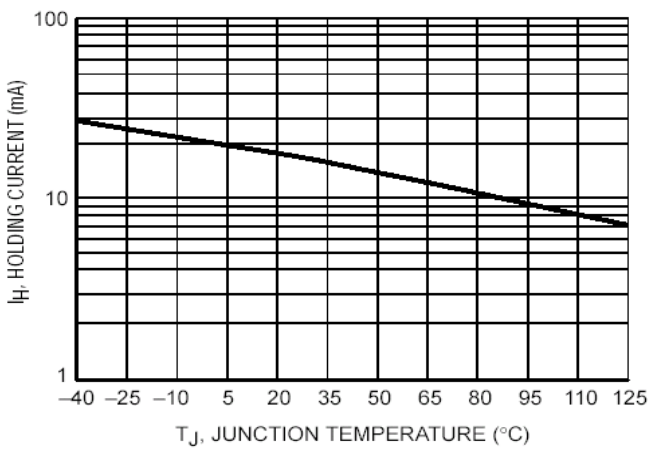


Figure 5. Typical Holding Current versus Junction Temperature

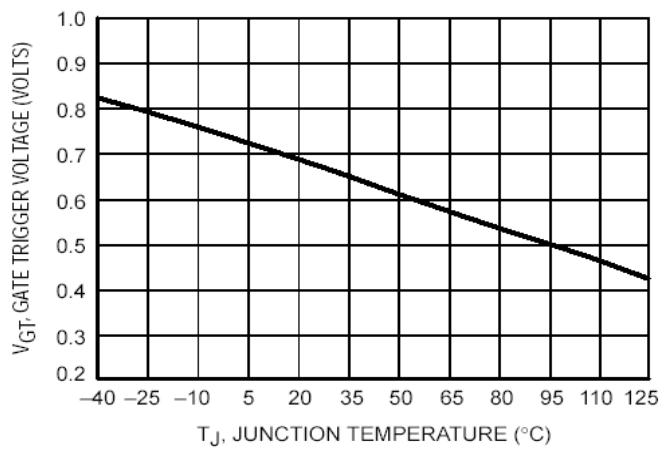


Figure 6. Typical Gate Trigger Voltage versus Junction Temperature

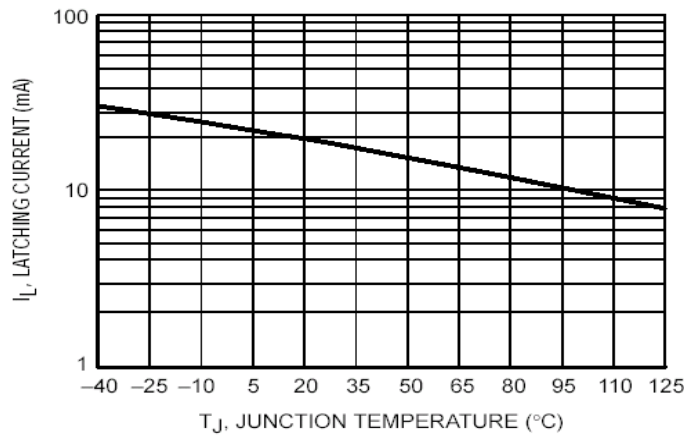


Figure 7. Typical Latching Current versus Junction Temperature

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.