

TLE6212

System-IC for ABS/TC/ESC

Automotive Power



Never stop thinking



Overview

Features

- Quad Wheelspeed sensor interface for active sensors
 - Active Wheel Speed Sensor supply
 - Active Wheel Speed signal conditioning
- Quad Wheelspeed sensor interface for passive sensors
 - Passive Wheel Speed signal conditioning
- Multi-Supply for Microcontroller
 - Control circuit for protected regulator pre-driver (8 V)
 - Control circuit for three voltage regulators (1.9 V, 3.3 V & 5 V)
 - Under-and overvoltage reset
- High Side Driver for Pump motor FET
- High Side Main FET driver
- Extended watchdog functionality
 - Window watchdog
 - Signature Watchdog
- Temperature monitoring
- 2 High voltage Enable outputs
- 2 High voltage general purpose outputs
- ISO conform K-line interface
- 8-bit SPI interface
- Green Product (RoHS compliant)
- AEC Qualified



PG-LQFP-64

Functional Description

The TLE6212 is a system IC intended for ABS, Traction Control and Electronic Stability Control Systems. It is especially designed for automotive use. The device is based on Infineon’s power technology SPT4 which allows bipolar and CMOS control circuitry to be integrated with DMOS power devices on the same monolithic circuitry.

The TLE6212 includes different functions needed for ABS, TC and ESC systems as Wheel Speed Sensor Interface both for active or passive sensors, multiple supply control for the micro controller and other components on the PCB, High Side Driver for Pump Motor and Main switch. High voltage enable and general purpose outputs and K-Line interface is available for off-board communication. A 8 bit SPI interface allows communication and programming from the micro controller.

For safety reasons a window watchdog / signature watchdog is included. In addition a logic backbone connects all sub-blocks and its supervision functions to each other and to the SPI communication interface.

Type	Package	Marking
TLE6212	PG-LQFP-64	TLE6212

1 Block Diagram and Pin Configuration

1.1 Block Diagram

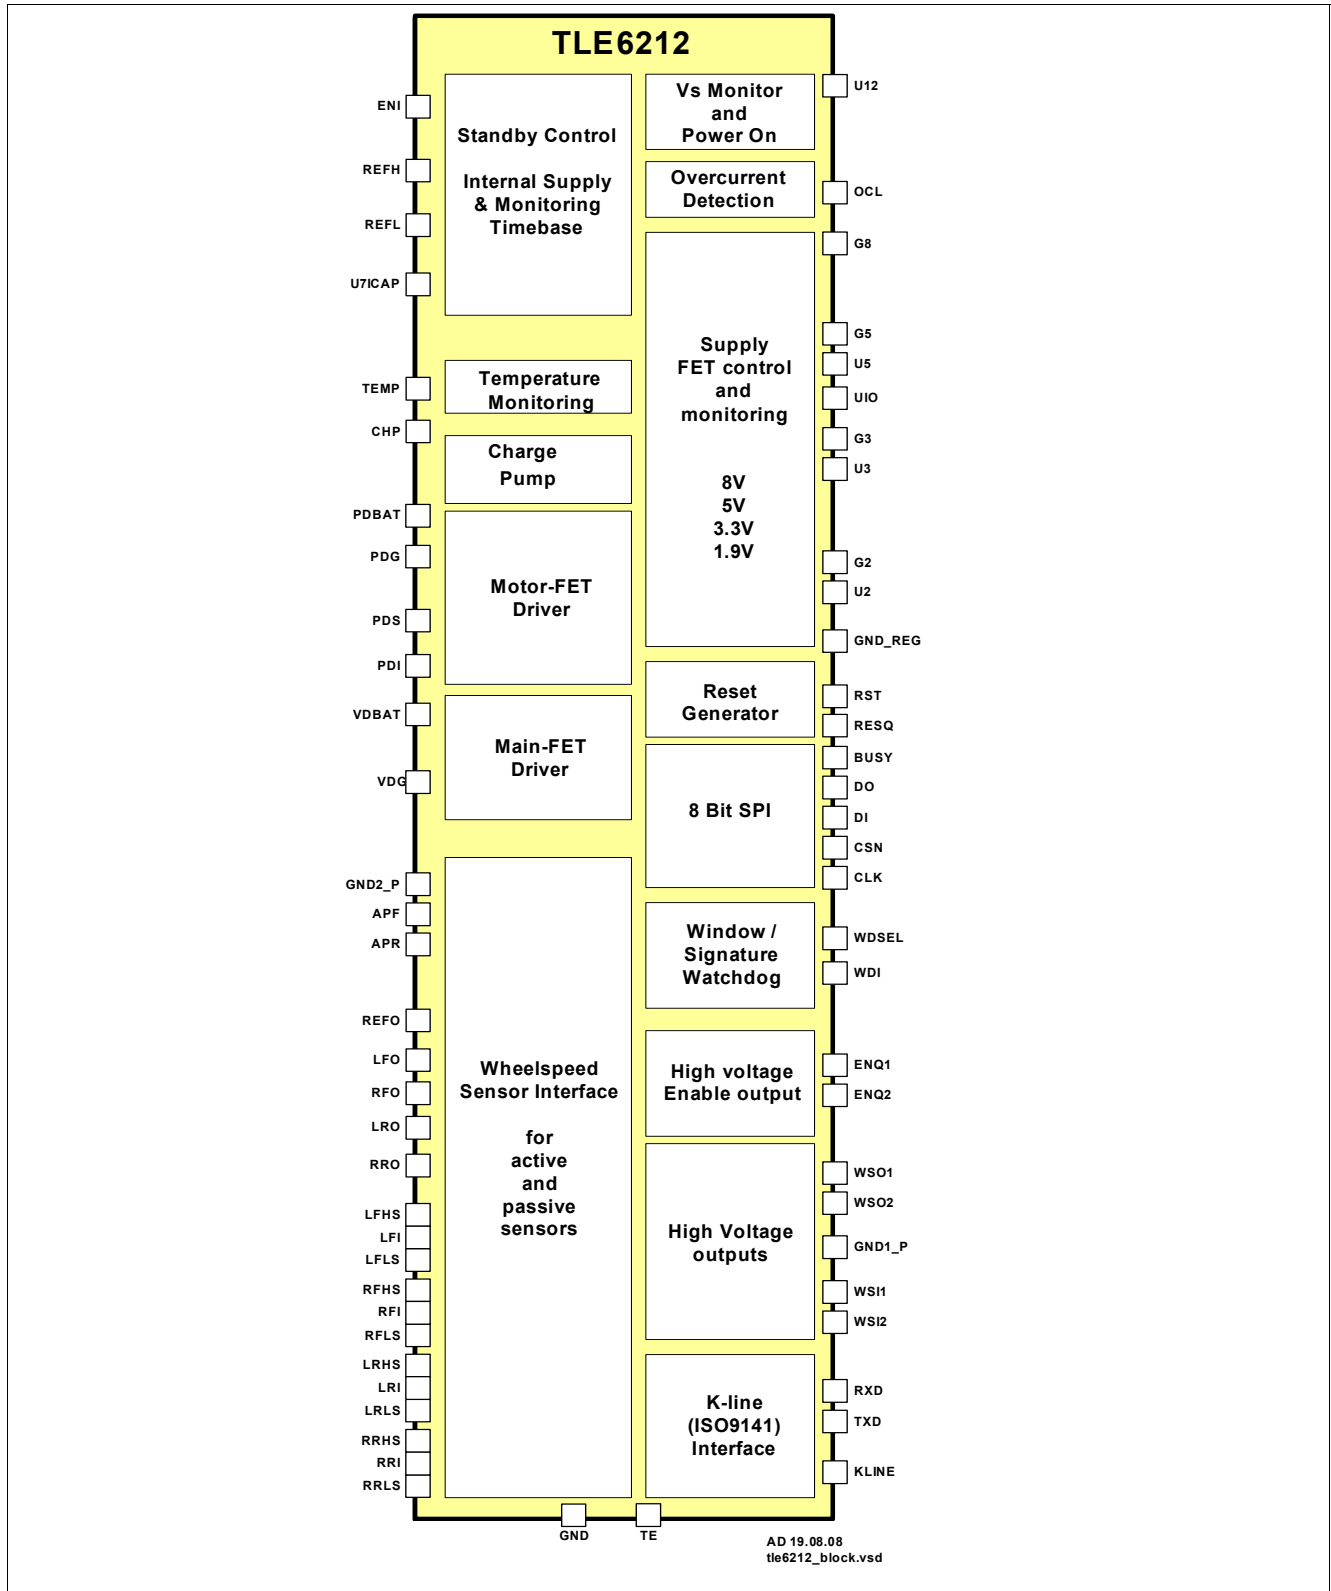


Figure 1 Block Diagram

Edition 2008-10-24

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2008 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.