

ON Semiconductor DATA SHEET

SVC251SPA — Diffused Junction Type Silicon Diode

Varactor Diode for AFC, CB PLL

Features

- The SVC251SPA is a varactor diode of hyper abrupt junction structure fabricated with ion implantation technology. It is intended for use in AFC, CB PLL VCO cicuitry
- · High Q
- · High capacitance ratio

Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	VR		12	V
Junction Temperature	Tj		100	°C
Storage Temperature	Tstg		-55 to +100	°C


Electrical Characteristics at Ta=25°C


Parameter	Symbol	Conditions	Ratings			Linit
			min	typ	max	Unit
Breakdown Voltage	V(BR)R	I _R =10μA	12			V
Reverse Current	IR	V _R =9V			200	nA
Interterminal Capacitance	C _{1.6} V	V _R =1.6V, f=1MHz	23		38	pF
	C _{5.0V}	V _R =5.0V, f=1MHz	11		19	pF
Capacitance Ratio	CR	C _{1.6V} /C _{5.0V}	1.7			
Series Resistance	rs	f=50MHz, V _R =1V			0.6	Ω

Package Dimensions


unit: mm (typ)

1184

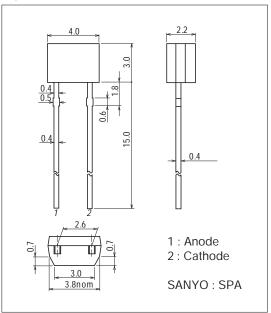

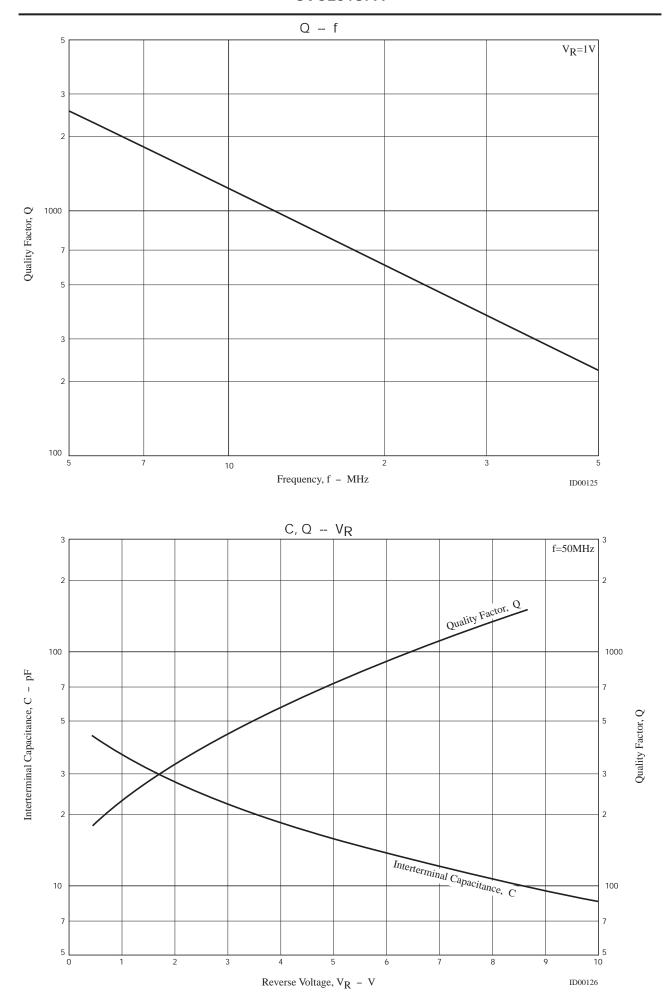

SVC251SPA

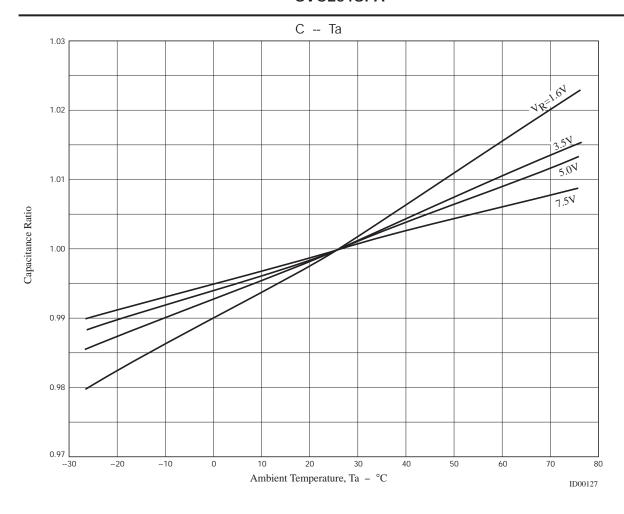

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. SCILLC strives to supply high-quality high-reliability products and recommends adopting safety measures when designing equipment to avoid accidents or malfunctions. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals," must be validated for each customer application by customer's technical experts. SCILLC shall not be held liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damag

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada.

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5773-3850 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative