



**KEMET Part Number: EFR(01)-240X240T0800**  
 (UFSEFR010AT080, EFR(01)240x240T0800, EFR(01)-240x240T08)



Flex Suppressor Halogen Free Type

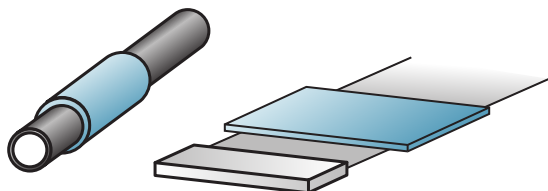

General Information	
Features:	Standard Specifications
Type:	EFR
Effective Frequency:	Up to 10GHz
Operating Temperature:	-40 to +105C
Thickness (mm):	0.1
Adhesive Tape Thickness (mm):	0.03
Standard Dimensions:	240x240mm
Specific gravity (in 23C atmosphere):	2.8 (typ)
Tensile Strength:	3.6Mpa min
Surface Resistance:	1.0 x 10MOhm (min)
Thermal Conductivity:	0.22 W/m K
Approved Standard:	UL94 V-0 / UL File No.E176124
RoHS:	Compliant
Environment Others:	Halogen free, PVC free, Lead free
Relative Magnetic Permeability:	60 (typ. at 1MHz)
Remarks:	u60 high permeability. Various thickness. Flame retardant. (UL94 V-0 certified)
Misc. Packaging:	Without PET Tape. (Txx00)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

