

400-mA Smart Regulator for Network Interface Card

FEATURES

- Single Fixed 3.3-V Output
- Linear Regulator for 5-V Power Input
- Auxilliary Input Can Be Bypassed
- Automatically Switches Between Linear Regulator and Bypass Mode
- Linear Regulator: 3.3-V \pm 3% Output at 400-mA Current; 600-mA Peak Output Current
- Low Bypass Switch Voltage-Drop: <55-mV at 150 mA
- Built-in Short Circuit and Thermal Shutdown Protection

- Low Supply Current
- SOIC-8 Package

APPLICATIONS

- Network Interface Cards (NIC)
- PCMCIA Cards
- Cardbus
- Desktop Computers/Workstations

DESCRIPTION

The Si91861 provides a constant 3.3-V output with multiple inputs. This function is required in many power interface applications, such as the Network Interface Card (NIC). The Si91861 is offered in small SOIC-8 package with up to 2-W power handling capability. The complete application circuit uses only three external components.


The linear regulator steps down from the 5-V supply ($5 V_{IN}$) to 3.3 V. A 200-m Ω bypass switch is integrated to connect the 3.3- V_{AUX} input to the output. The power drawn priority is

$5 V_{IN} > 3.3 V_{AUX}$, where the selection is done internally and automatically by the Si91861. The power handling capability is as such as to carry at least 400-mA continuous load current for any power input condition.

In order to satisfy the stringent ambient temperature requirements in many applications, the Si91861 is rated for the industrial temperature range of -40°C to 85°C .

The Si91861 is available in both standard and lead (Pb)-free packages.

FUNCTIONAL BLOCK DIAGRAM

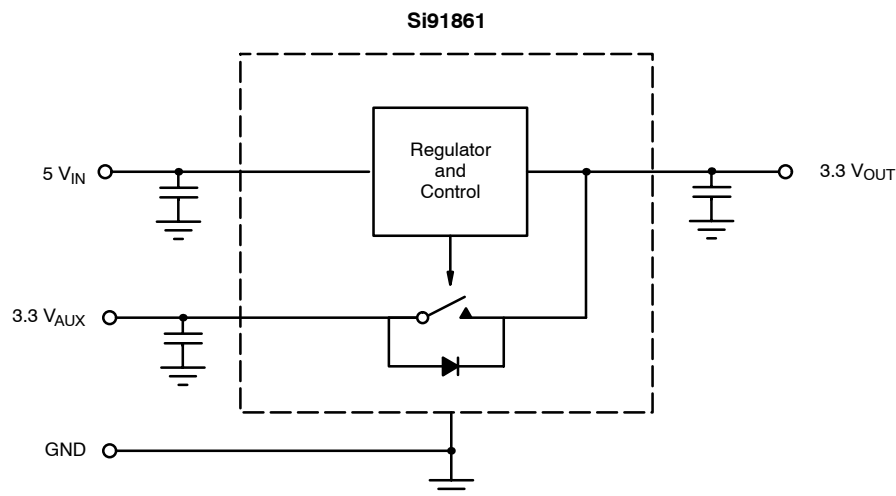

ABSOLUTE MAXIMUM RATINGS

Pin 2, 4 Voltage	-0.3 V to 6 V
Linear Regulator Output Current	600 mA
Bypass Switch Current	600 mA
Maximum Junction Temperature, $T_{J(max)}$	150°C
Storage Temperature, T_{STG}	-55°C to 150°C
ESD (Human Body Model)	2 kV

Package Power Dissipation ^b	
P_D	2W (internally limited via thermal shutdown)
Thermal Impedance (θ_{JA}) ^a	62.5°C/W

Notes

- Device mounted with all leads soldered or welded to PC board.
- Derate 16 mW/°C above $T_A = 25^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING RANGE

$5-V_{IN}$	4.5 V to 5.5 V	$3.3 V_{OUT}$ Loading	1 mA to 400 mA
$3.3-V_{AUX}$	3 V to 3.6 V	Operating Ambient Temperature, T_A	-40°C to 85°C

SPECIFICATIONS							
Parameter	Symbol	Test Conditions Unless Otherwise Specified $5 V_{IN} = 5 V, 3.3 V_{AUX} = 3.3 V$ $I_{OUT} = 1 mA, C_{IN} = 4.7 \mu F, C_{OUT} = 2.2 \mu F$	Temp ^a	Limits -40 to 85°C			Unit
				Min ^b	Typ ^c	Max ^b	
Regulator Mode							
Output Voltage (Regulator)	$V_{O(reg)}$	$0 mA < I_{OUT} < 400 mA, 5 V_{IN} > 4.5 V$	Full	3.201	3.3	3.399	V
$5 V_{IN}$ Select		Rising Edge of Hysteresis	Threshold	Full		4.30	4.475
			Hysteresis	Full		230	
Ground Pin Current In Regulator Mode ^d	I_{GND}	$I_O = 0 mA$	Full		0.3	0.8	mA
		$I_O = 400 mA$	Full		0.7	1.6	
Peak Output Current (Regulator)	I_O	$t_{PW} = 2 ms$	Full	600			
Output Noise Voltage (Regulator)	e_N	$BW = 50 Hz \text{ to } 100 kHz, I_{OUT} = 150 mA$	Room		300		μV_{rms}
Ripple Rejection (Regulator)	$\Delta 3.3 V_{OUT} / \Delta 5 V_{IN}$	$I_{OUT} = 150 mA$	1 kHz	Room		60	dB
			10 kHz	Room		40	
			100 kHz	Room		30	
Dynamic Line Regulation	$\Delta V_{O(line)}$	$V_{IN} = 4.5 V \cdot 5.5 V$ $t_R/t_F = 2 \mu s, I_{OUT} = 150 mA$	Room		10		mV
Dynamic Load Regulation	$\Delta V_{O(load)}$	$I_{OUT}: 1 mA \text{ to } 150 mA, t_R/t_F = 2 \mu s$	Room		20		
V_{OUT} Turn-On-Time	t_{ON}		Room		15		μs
Thermal Shutdown Junction Temperature	$T_{J(sd)}$		Full		165		°C
Thermal Hysteresis	T_{HYST}		Full		20		
Short Circuit Current	I_{SC}	$3.3 V_{OUT} = 0 V$	Room		900		mA
Bypass Mode ($5 V_{IN} = GND$)							
Output Voltage	$V_{O(BP)}$	$0 mA < I_{OUT} < 150 mA$	Full	3.247			V
Bypass Switch On-Resistance	$r_{DS(on)}$	$3.0 V \leq V_{AUX} \leq 3.6 V$	Full		0.2	0.35	Ω
Ground Current ^d	I_{GND}	$0 mA < I_{OUT} < 400 mA$	Full		200	400	μA

Notes

- Room = 25°C, Full = -40 to 85°C.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing. Typical values at 25°C ambient.
- Ground pin current includes the IC supply current and the current to drive the linear regulator or bypass switch.

TIMING WAVEFORMS


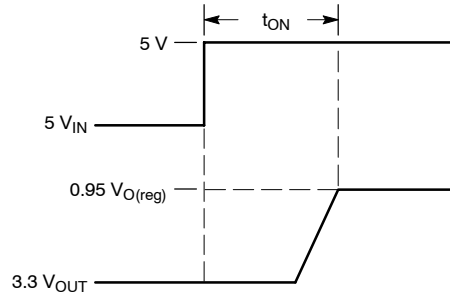


FIGURE 1. Timing Diagram

PIN CONFIGURATION







PIN DESCRIPTION		
Pin Number	Name	Function
1	N.C.	Not connected. No effect to device operation
2	$5 V_{IN}$	Power input for the Regulator
3	$3.3 V_{OUT}$	Output 3.3 V
4	$3.3 V_{AUX}$	Power input for the bypass function
5, 6, 7, 8	GND	Ground

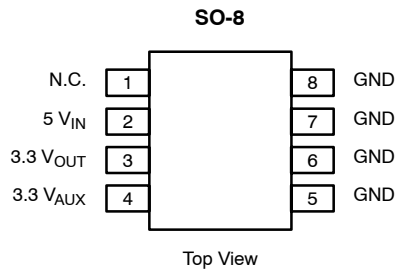


ORDERING INFORMATION		
Part Number	Temperature Range	Package
Si91861DY-T1	-40 to 85°C	Tape and Reel
Si91861DY-T1—E3		
Si91861DY		Bulk
Eval Kit	Temperature Range	Board Type
Si91861DB	-40 to 85°C	Surface Mount

TYPICAL CHARACTERISTICS

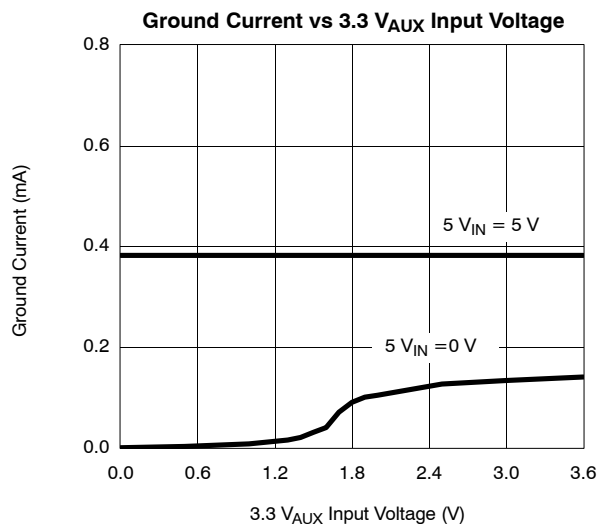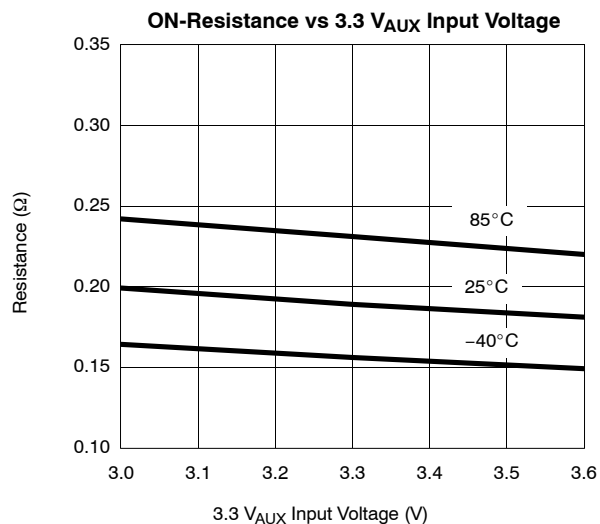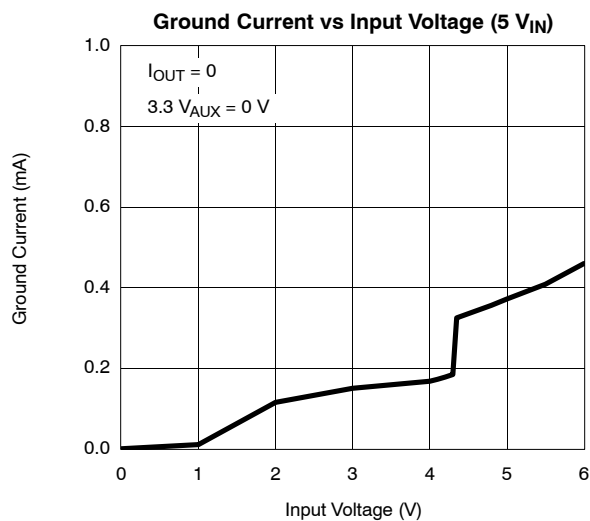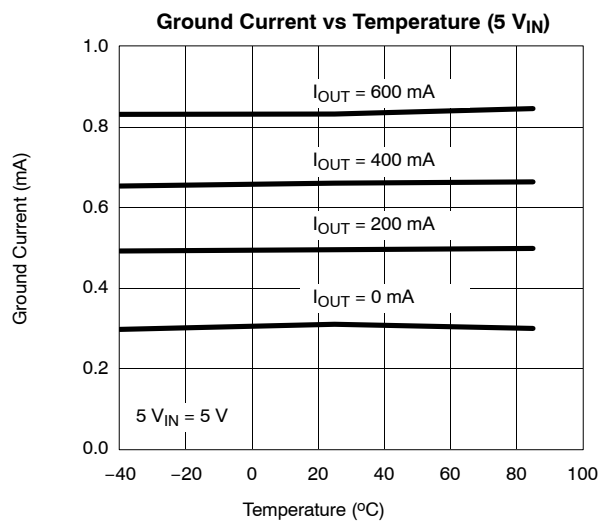


TYPICAL WAVEFORMS


Load Transient Response-1

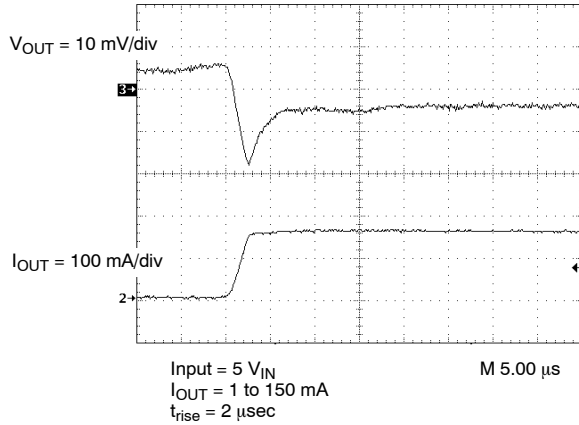


Load Transient Response-2

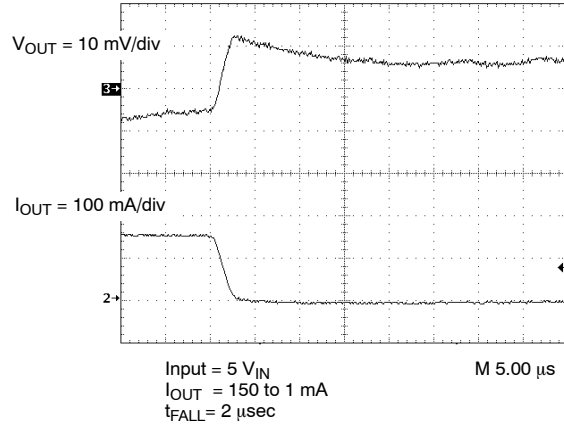


Load Transient Response-3

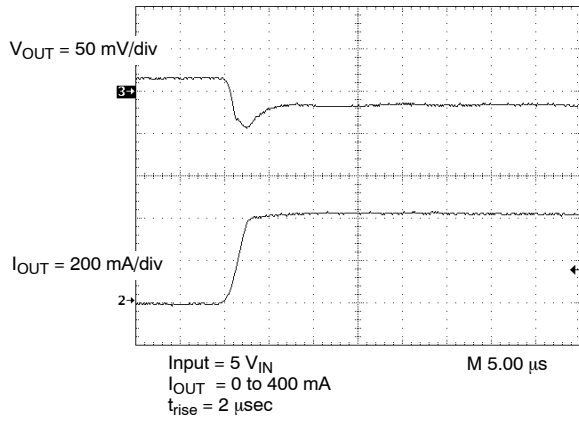


Load Transient Response-4

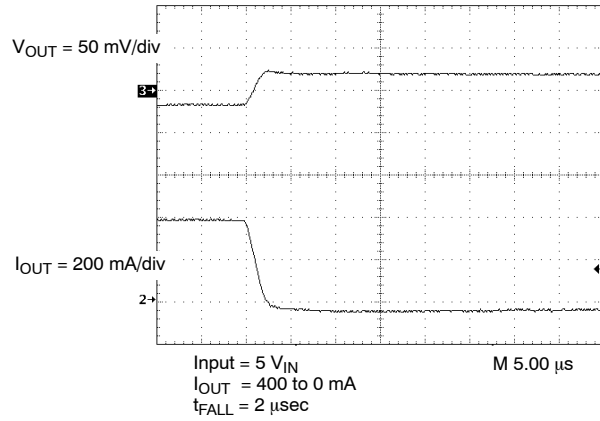

5- V_{IN} Power Up




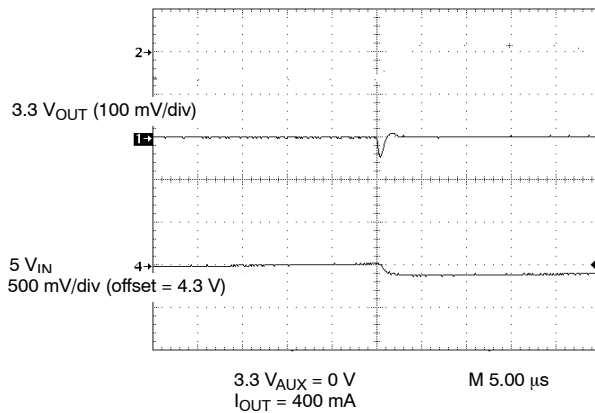


5- V_{IN} Power Down

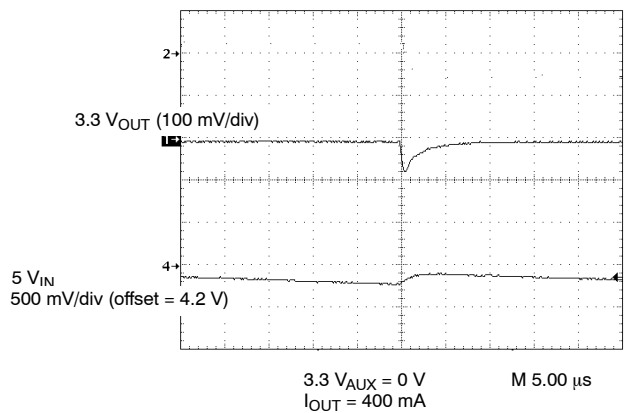





TYPICAL WAVEFORMS

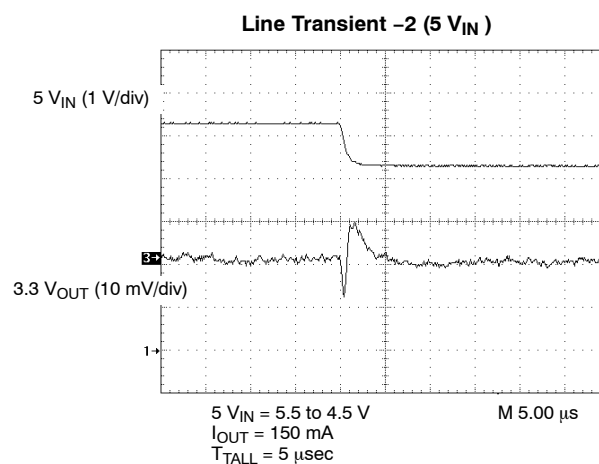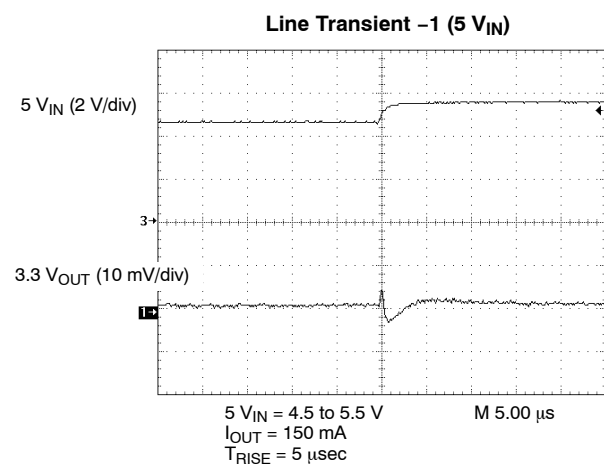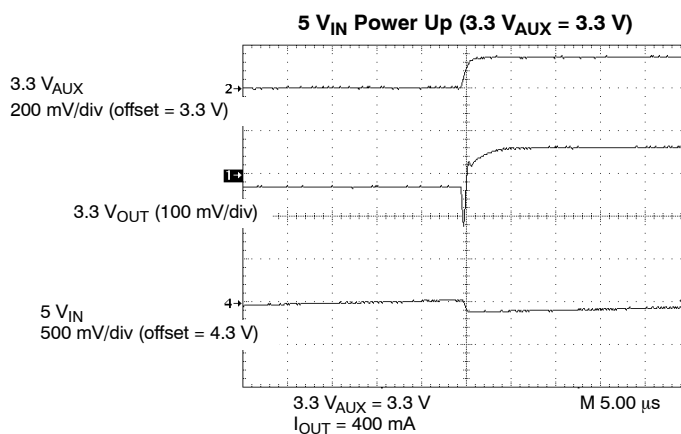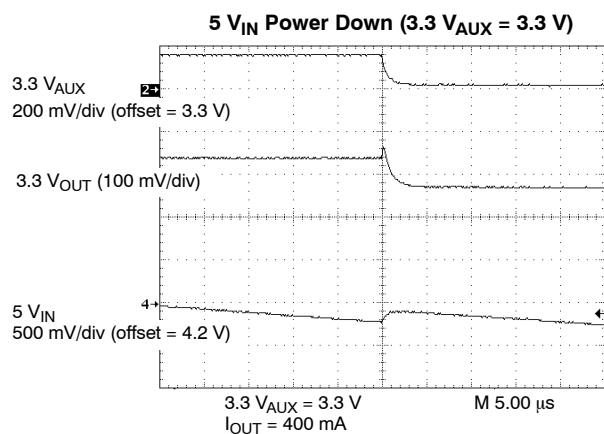

Power Supply Ripple Rejection vs. Frequency

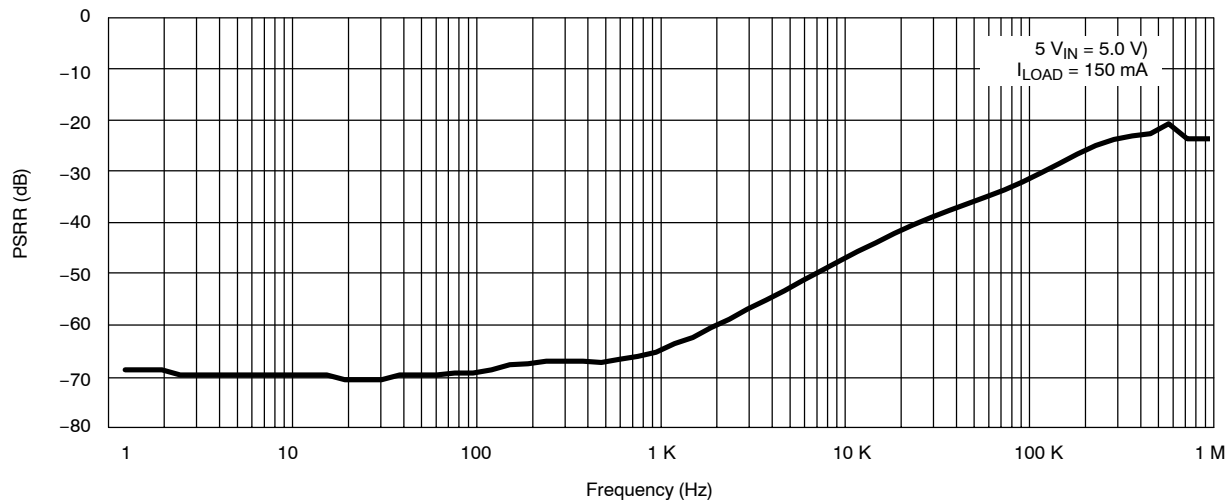

BLOCK DIAGRAMS AND TYPICAL APPLICATION CIRCUIT

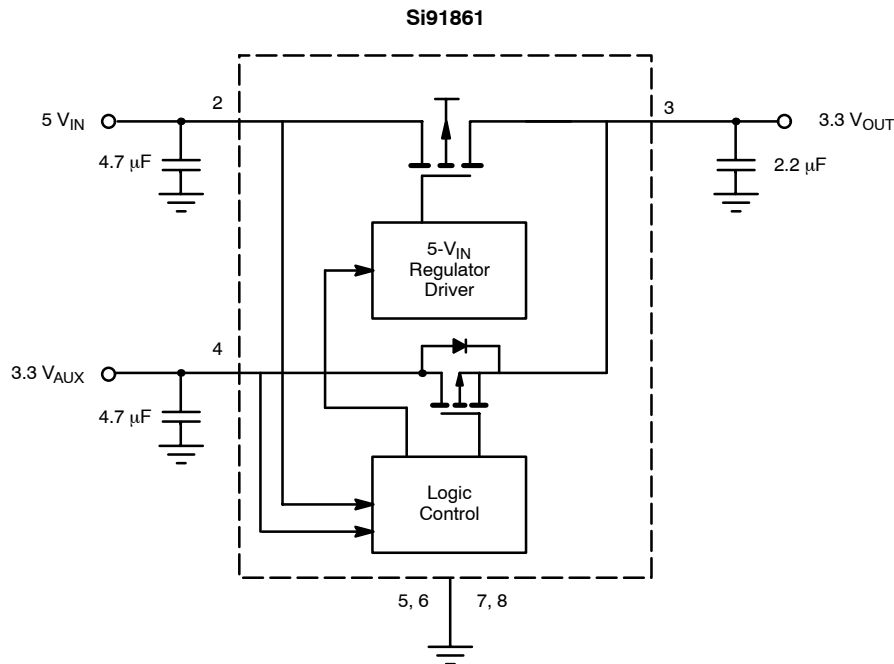

DETAIL DESCRIPTION

During normal operation, the $5-V_{IN}$ input powers the fixed 3.3-V output ($3.3 V_{OUT}$) through an internal linear regulator. If $5 V_{IN}$ falls below 4.07 V, the output ($3.3 V_{OUT}$) is powered from $3.3-V_{AUX}$ input. The power drawn sequence is from $5 V_{IN}$, then $3.3 V_{AUX}$. The device prevents reverse current from flowing from the output to any unbiased or low voltage input.

Linear Regulator Mode

The output is regulated at 3.3 V when the $5-V_{IN}$ pin is more than 4.30 V. The linear regulator will regulate the output until the $5-V_{IN}$ pin fall below 4.07 V.

Bypass Mode

When the $5-V_{IN}$ pin falls below 4.07 V, the output is powered by $3.3 V_{AUX}$ through a $0.2-\Omega$ internal switch.

Thermal and Over-current Protection

Thermal protection limits total power dissipation in the device. It safeguards the device in the event of fault conditions. When the junction temperature exceeds 165°C , the device turns off. The device turns back on once its junction temperature cools down by approximately 20°C . The device has overcurrent protection (typically at 900 mA) when it operates in linear regulator mode. A continuous short at output pin ($3.3 V_{OUT}$) will result in a pulsed output as the thermal protection circuitry cycles the device on and off. For continuous operation, do not exceed the junction rating of 150°C . In bypass mode, the device is not current limited.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.