



ZVN3310A


TYPICAL CHARACTERISTICS

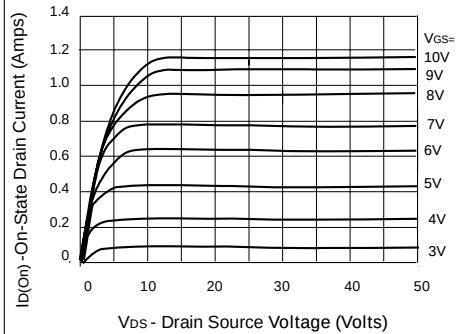


Output Characteristics

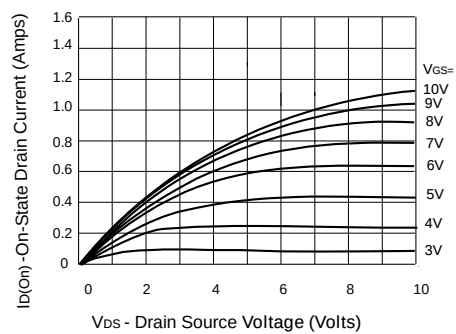


Saturation Characteristics

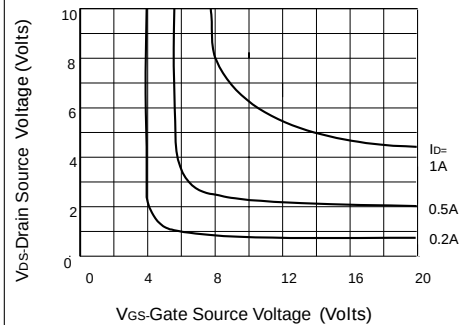


Voltage Saturation Characteristics

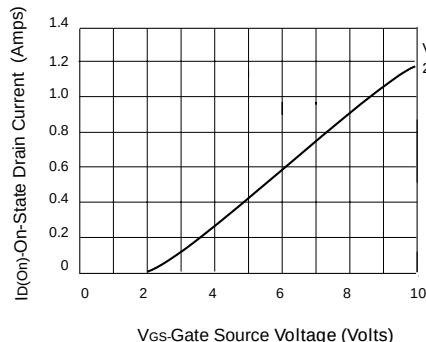

Transfer Characteristics

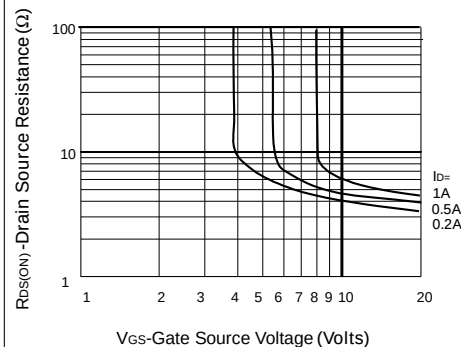

On-resistance vs gate-source voltage

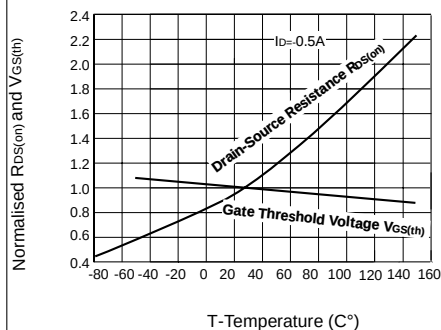

Normalised $R_{DS(on)}$ and $V_{GS(th)}$ vs Temperature


N-CHANNEL ENHANCEMENT MODE VERTICAL DMOS FET

ISSUE 2 - MARCH 94

FEATURES

- * 100 Volt V_{DS}
- * $R_{DS(on)} = 10\Omega$

ZVN3310A



E-Line
TO92 Compatible

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	V_{DS}	100	V
Continuous Drain Current at $T_{amb}=25^{\circ}C$	I_D	200	mA
Pulsed Drain Current	I_{DM}	2	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	625	mW
Operating and Storage Temperature Range	$T_j:T_{stg}$	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	BV_{DSS}	100		V	$I_D = 1mA, V_{GS} = 0V$
Gate-Source Threshold Voltage	$V_{GS(th)}$	0.8	2.4	V	$I_D = 1mA, V_{DS} = V_{GS}$
Gate-Body Leakage	I_{GSS}		20	nA	$V_{GS} = \pm 20V, V_{DS} = 0V$
Zero Gate Voltage Drain Current	I_{DSS}		1 50	μA μA	$V_{DS} = 100V, V_{GS} = 0$ $V_{DS} = 80V, V_{GS} = 0V, T = 125^{\circ}C(2)$
On-State Drain Current(1)	$I_{D(on)}$	500		mA	$V_{DS} = 25V, V_{GS} = 10V$
Static Drain-Source On-State Resistance (1)	$R_{DS(on)}$		10	Ω	$V_{GS} = 10V, I_D = 500mA$
Forward Transconductance(1)(2)	g_{fs}	100		mS	$V_{DS} = 25V, I_D = 500mA$
Input Capacitance (2)	C_{iss}		40	pF	$V_{DS} = 25V, V_{GS} = 0V, f = 1MHz$
Common Source Output Capacitance (2)	C_{oss}		15	pF	
Reverse Transfer Capacitance (2)	C_{rss}		5	pF	$V_{DD} \approx 25V, I_D = 500mA$
Turn-On Delay Time (2)(3)	$t_{d(on)}$		5	ns	
Rise Time (2)(3)	t_r		7	ns	
Turn-Off Delay Time (2)(3)	$t_{d(off)}$		6	ns	
Fall Time (2)(3)	t_f		7	ns	

N-CHANNEL ENHANCEMENT
MODE VERTICAL DMOS FET


ISSUE 2 – MARCH 94

FEATURES

- * 100 Volt V_{DS}
- * $R_{DS(on)} = 10\Omega$

ZVN3310A

TYPICAL CHARACTERISTICS

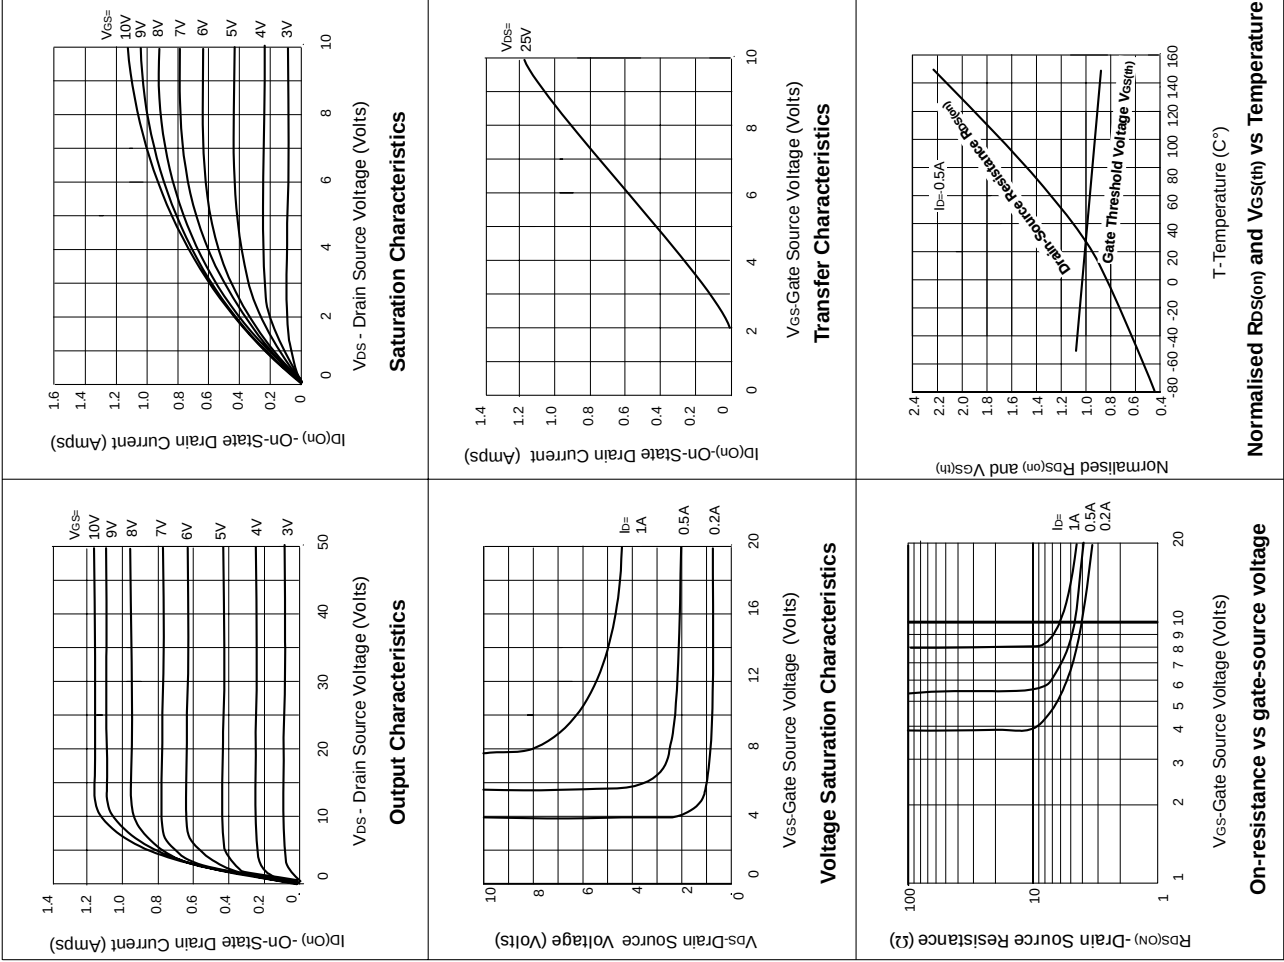

3-379

ABSOLUTE MAXIMUM RATINGS	
PARAMETER	
Drain-Source Voltage	
Continuous Drain Current at $T_{amb}=25^{\circ}C$	
Pulsed Drain Current	
Gate-Source Voltage	
Power Dissipation at $T_{amb}=25^{\circ}C$	
Operating and Storage Temperature Range	

ELECTRICAL CHARACTERISTICS	
PARAMETER	SYMBOL
Drain-Source Breakdown Voltage	BV_{DSS}
Gate-Source Threshold Voltage	$V_{GS(th)}$
Gate-Body Leakage	I_{GSS}
Zero Gate Voltage Drain Current	I_{DSS}
On-State Drain Current(1)	$I_{D(on)}$
Static Drain-Source On-State Resistance (1)	$R_{DS(on)}$
Forward Transconductance(1)(2)	g_{fs}
Input Capacitance (2)	C_{iss}
Common Source Output Capacitance (2)	C_{oss}
Reverse Transfer Capacitance (2)	C_{rss}
Turn-On Delay Time (2)(3)	$t_{d(on)}$
Rise Time (2)(3)	t_r
Turn-Off Delay Time (2)(3)	$t_{d(off)}$
Fall Time (2)(3)	t_f

ZVN3310A

TYPICAL CHARACTERISTICS

