

**SURFACE MOUNT
GLASS PASSIVATED RECTIFIER**

**REVERSE VOLTAGE – 1000 Volts
FORWARD CURRENT –1.0 Ampere**


FEATURES

- For surface mounted applications.
- Low reverse leakage current
- Low forward voltage drop
- High current capability

MECHANICAL DATA

- Case: JEDEC DO-219AA
- Case Material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl.) “Halogen-free”
- Terminals: Lead Free Plating (Matte Tin Finish.)
- Component in accordance to RoHs 2002/95/EC
- Marking code: S1M
- Weight: 16.3 mg (Approximate)

F1-A

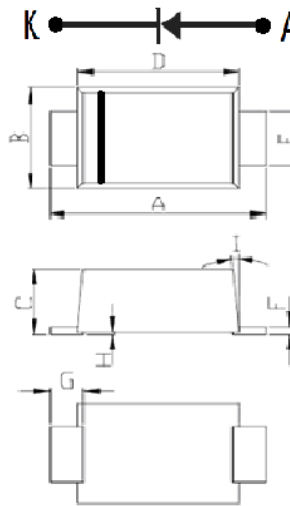

F1-A			
DIM.	MIN.	TYP.	MAX.
A	3.50	3.80	3.90
B	1.70	1.90	2.00
C	0.81	1.18	1.20
D	2.70	2.80	2.90
E	0.80	1.00	1.35
F	0.05	0.15	0.30
G	0.35	0.60	0.85
H	0.03	0.07	0.10
I	0°	5°	8°
All dimension in millimeter			

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	1000	V
Average rectified output current $T_C=100^\circ\text{C}$	$I_{(AV)}$	1.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load.	I_{FSM}	30	A
$I^2 t$ rating for fusing (t = 8.3ms)	$I^2 t$	3.74	A ² S
Operating junction temperature range	T_J	-55 to +150	°C
Storage temperature range	T_{STG}	-55 to +150	°C

STATIC ELECTRICAL CHARACTERISTICS

PARAMETER	TEST CONDITIONS	SYMBOL	TYP.	MAX	UNIT
Forward voltage	$I_F = 1\text{A}$ $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	V_F	-- 0.86	1.1 --	V
Leakage current	$V_R = 1000\text{V}$ $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	I_R	-- --	5.0 500	uA
Typical junction capacitance (Note 1)		C_J		7.6	pF

THERMAL CHARACTERISTICS

THERMAL CHARACTERISTIC	SYMBOL	TYP.	UNIT
Typical thermal resistance (Note 2)	R_{thJC}	53	°C/W
	R_{thJL}	45	
	R_{thJA}	152	

DYNAMIC ELECTRICAL CHARACTERISTICS

PARAMETER	TEST CONDITION	SYMBOL	MIN.	MAX	UNIT
Reverse recovery time	$I_F = 0.5\text{A}$, $I_{rr} = 0.25\text{A}$, $I_R = 1.0\text{A}$ $T_J = 25^\circ\text{C}$	T_{RR}	1000	1600	nS

Note :

- (1) Measured at 1.0MHz and applied voltage of 4.0VDC.
- (2) Thermal resistance test performed in accordance with JESD-51. Unit mounted on glass-epoxy substrate with 1oz/ft²_3 mm x 3 mm copper pad per pin.

REV.3 Mar.-2017, KSAP01

Please be aware that an **Important Notice and Disclaimer** concerning availability, disclaimers, and use in critical applications of LSC products thereto appears at the end of this Data Sheet.

FIG.1- FORWARD CURRENT DERATING CURVE

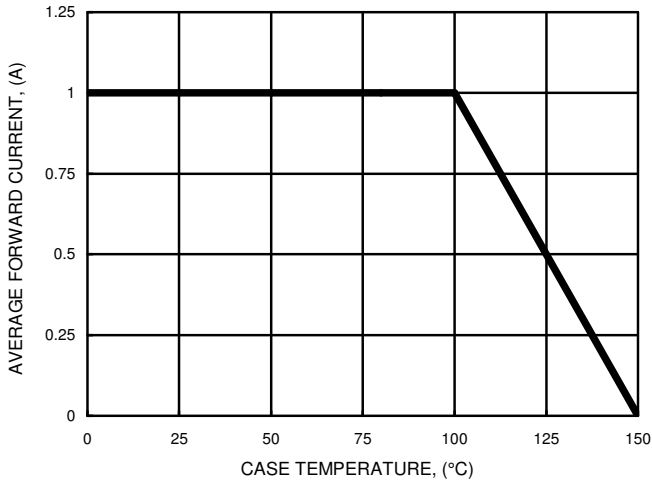


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

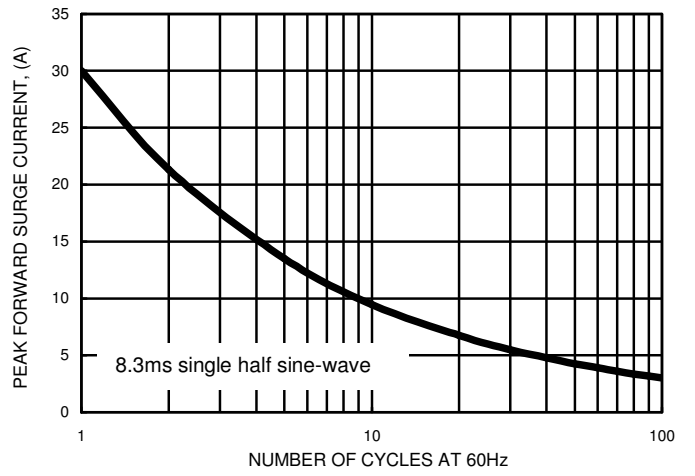


FIG.3- TYPICAL FORWARD CHARACTERISTICS

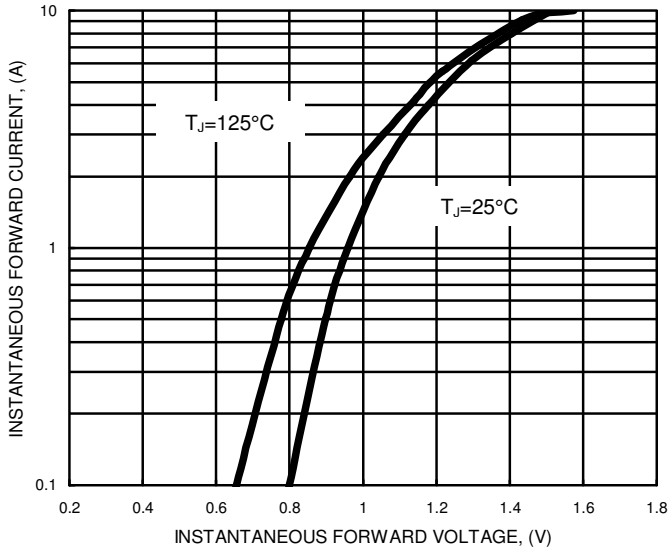


FIG.4- TYPICAL JUNCTION CAPACITANCE


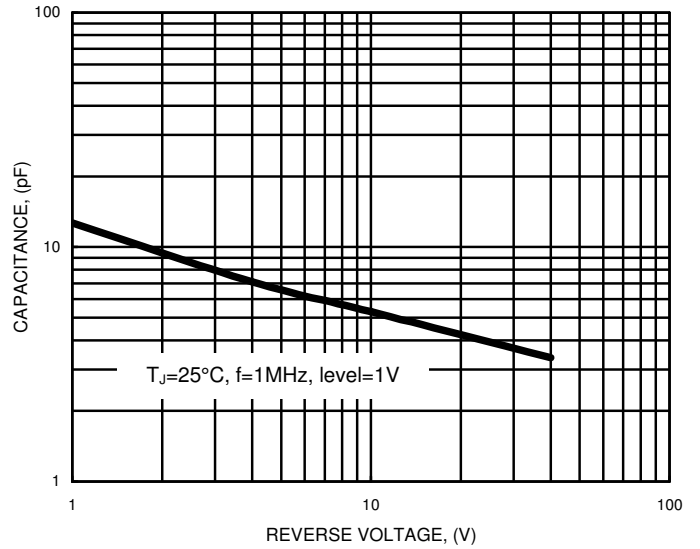


FIG.5- TYPICAL REVERSE CHARACTERISTICS

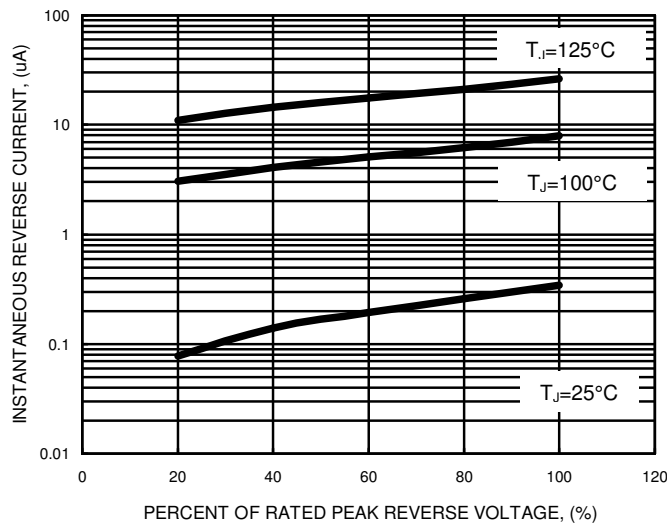

IMPORTANT NOTICE AND DISCLAIMER

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design purchase or use.

All information are provided as-is, even it has qualified by the AEC-Q101 which satisfy industrial application requirement, except as expressly stated in this data sheet is applied for automotive grade, LSC make no warranties, representation or guarantee, whether express, implied or statutory, including, without limitation, regarding any merchantability, satisfactory quality, or fitness for a particular purpose with respect to the LSC technology.

LSC does not assume any liability or compensation for any application assistance or customer product design, and make no warranty or accept any liability with products, which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.