


**SURFACE MOUNT ZENER DIODE**

**REVERSE VOLTAGE – 2.4 to 75 Volts  
POWER DISSIPATION – 0.5 Watts**

- FEATURES**
- Wide Zener Voltage Range Selection, 2.4V to 75V
  - VZ Tolerance Selection of  $\pm 2\%$  (B Series)
  - Flat Lead SOD-123F Plastic Package
  - Surface Device Type Mounting
  - Green EMC
  - Matte Tin(Sn) Lead Finish
  - RoHS compliant
  - Band Indicates Cathode
- MECHANICAL DATA**
- Case: SOD-123F Plastic

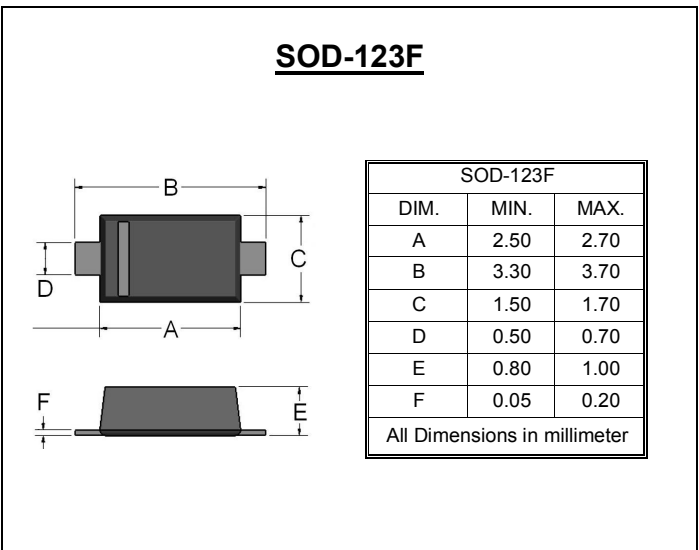

**Maximum Ratings & Thermal Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified**

Characteristic	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	500	mW
Storage Temperature Range	T <sub>STG</sub>	-65 to +150	°C
Operating Temperature Range	T <sub>OPR</sub>	-65 to +150	°C

**Device Marking :**

Device P/N	Marking	Pin Diagram	Equivalent Circuit Diagram
MMSZxxxBWF	See below table		

**Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified**

Symbol	Parameter
V <sub>Z</sub>	Reverse Zener Voltage @ I <sub>ZT</sub>
I <sub>ZT</sub>	Reverse Current
Z <sub>ZT</sub>	Maximum Zener Impedance @ I <sub>ZT</sub>
I <sub>ZK</sub>	Reverse Current
Z <sub>ZK</sub>	Maximum Zener Impedance @ I <sub>ZK</sub>
I <sub>R</sub>	Reverse Leakage Current @ V <sub>R</sub>
V <sub>R</sub>	Reverse Voltage
I <sub>F</sub>	Forward Current
V <sub>F</sub>	Forward Voltage @ I <sub>F</sub>

REV.1, May-2013, KSIR20

Device	Device marking	Zener Voltage				Maximum Zener Impedance			Maximum Reverse Current	
		VZ@IZT			IZT	ZZT@IZT	IZK	ZZK@IZK	IR @VR	
		Min	Nom	Max	mA	Ω	mA	Ω	uA	V
MMSZ2V4BWF	2V4B	2.35	2.4	2.45	5	100	1	564	45	1
MMSZ2V7BWF	2V7B	2.65	2.7	2.75	5	100	1	564	18	1
MMSZ3V0BWF	3V0B	2.94	3.0	3.06	5	100	1	564	9	1
MMSZ3V3BWF	3V3B	3.23	3.3	3.37	5	95	1	564	4.5	1
MMSZ3V6BWF	3V6B	3.53	3.6	3.67	5	90	1	564	4.5	1
MMSZ3V9BWF	3V9B	3.82	3.9	3.98	5	90	1	564	2.7	1
MMSZ4V3BWF	4V3B	4.21	4.3	4.39	5	90	1	564	2.7	1
MMSZ4V7BWF	4V7B	4.61	4.7	4.79	5	80	1	470	2.7	2
MMSZ5V1BWF	5V1B	5.00	5.1	5.20	5	60	1	451	1.8	2
MMSZ5V6BWF	5V6B	5.49	5.6	5.71	5	40	1	376	0.9	2
MMSZ6V2BWF	6V2B	6.08	6.2	6.32	5	10	1	141	2.7	4
MMSZ6V8BWF	6V8B	6.66	6.8	6.94	5	15	1	75	1.8	4
MMSZ7V5BWF	7V5B	7.35	7.5	7.65	5	15	1	75	0.9	5
MMSZ8V2BWF	8V2B	8.04	8.2	8.36	5	15	1	75	0.63	5
MMSZ9V1BWF	9V1B	8.92	9.1	9.28	5	15	1	94	0.45	6
MMSZ10VBWF	10VB	9.80	10	10.20	5	20	1	141	0.18	7
MMSZ11VBWF	11VB	10.78	11	11.22	5	20	1	141	0.09	8
MMSZ12VBWF	12VB	11.76	12	12.24	5	25	1	141	0.09	8
MMSZ13VBWF	13VB	12.74	13	13.26	5	30	1	160	0.09	8
MMSZ15VBWF	15VB	14.70	15	15.30	5	30	1	188	0.045	10.5
MMSZ16VBWF	16VB	15.68	16	16.32	5	40	1	188	0.045	11.2
MMSZ18VBWF	18VB	17.64	18	18.36	5	45	1	212	0.045	12.6
MMSZ20VBWF	20VB	19.60	20	20.40	5	55	1	212	0.045	14.0
MMSZ22VBWF	22VB	21.56	22	22.44	5	55	1	235	0.045	15.4
MMSZ24VBWF	24VB	23.52	24	24.48	5	70	1	235	0.045	16.8
MMSZ27VBWF	27VB	26.46	27	27.54	2	80	0.5	282	0.045	18.9
MMSZ30VBWF	30VB	29.40	30	30.60	2	80	0.5	282	0.045	21.0
MMSZ33VBWF	33VB	32.34	33	33.66	2	80	0.5	306	0.045	23.0
MMSZ36VBWF	36VB	35.28	36	36.72	2	90	0.5	329	0.045	25.2
MMSZ39VBWF	39VB	38.22	39	39.78	2	130	0.5	329	0.045	27.3
MMSZ43VBWF	43VB	42.14	43	43.86	2	150	0.5	353	0.045	30.1
MMSZ47VBWF	47VB	46.06	47	47.94	2	170	0.5	353	0.045	33.0
MMSZ51VBWF	51VB	49.98	51	52.02	2	180	0.5	376	0.045	35.7
MMSZ56VBWF	56VB	54.88	56	57.12	2	200	0.5	400	0.045	39.2
MMSZ62VBWF	62VB	60.76	62	63.24	2	215	0.5	423	0.045	43.4
MMSZ68VBWF	68VB	66.64	68	69.36	2	240	0.5	447	0.045	47.6
MMSZ75VBWF	75VB	73.50	75	76.50	2	255	0.5	470	0.045	52.5


**V<sub>F</sub>** Forward Voltage=900mV Maximum@I<sub>F</sub>=10mA for all types

**Notes:**


1. The Zener Voltage (V<sub>Z</sub>) is tested under pulse condition of 10mS.
2. The device numbers listed have a standard tolerance on the nominal zener voltage of ±2%.
3. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest Liteon Semiconductor Corp. representative.
4. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I<sub>ZT</sub> or I<sub>ZK</sub>) is superimposed to I<sub>ZT</sub> or I<sub>ZK</sub>.

**MMSZ2V4BWF THRU MMSZ75VBWF**  
**Typical Characteristics**


**Fig.1 Power Derating Curve**

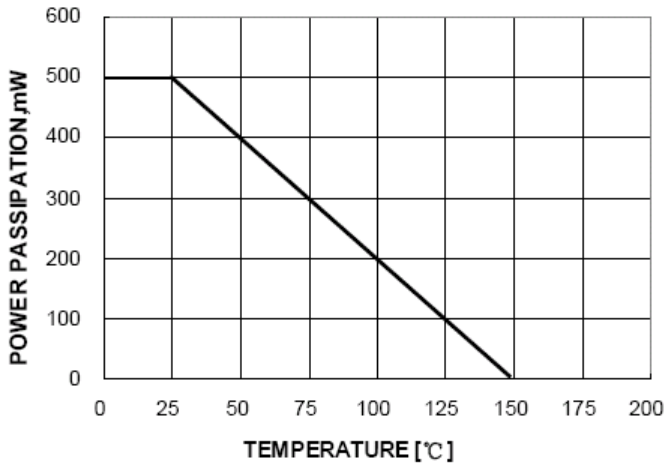


**Fig.2 Typical Zener Breakdown Characteristics**

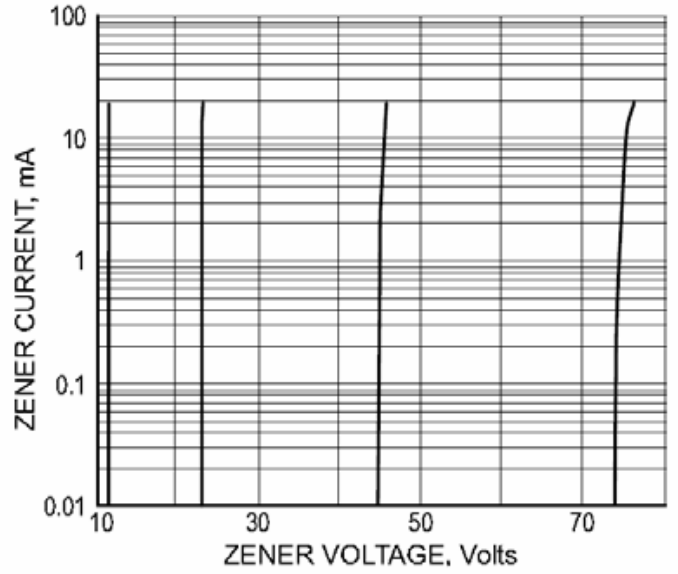


**Fig.3 Typical Zener Breakdown Characteristics**

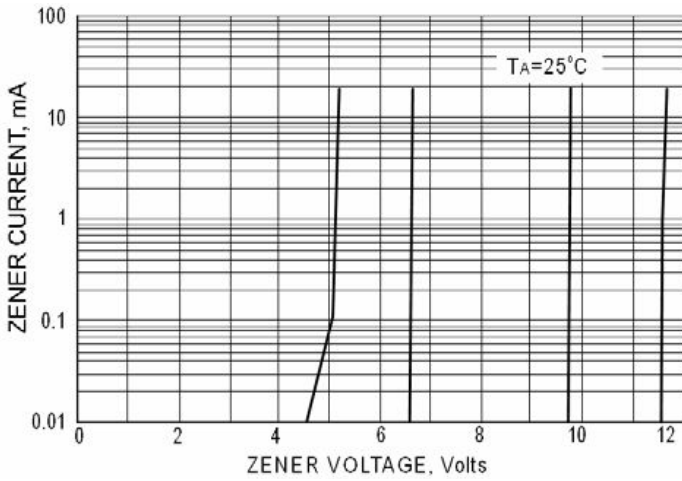


**Fig.4 Typical Total Capacitance vs. Nominal Zener Voltage**

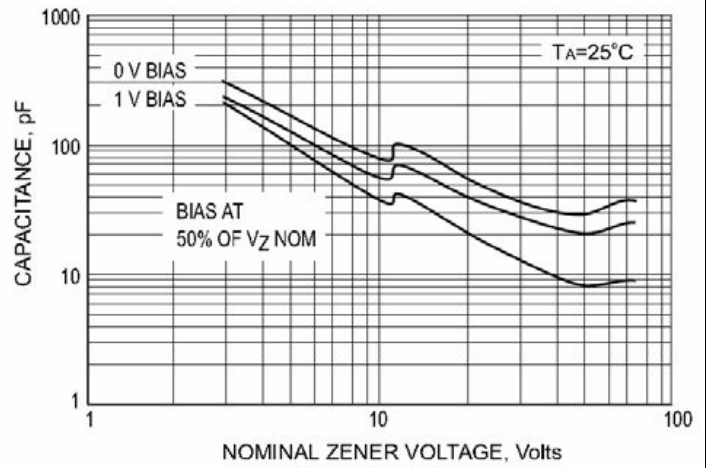

**Fig.5 EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE**

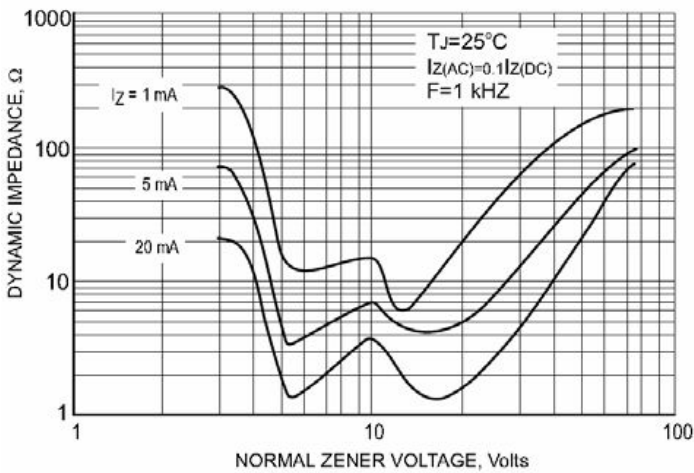


**Fig.6 TYPICAL FORWARD VOLTAGE**

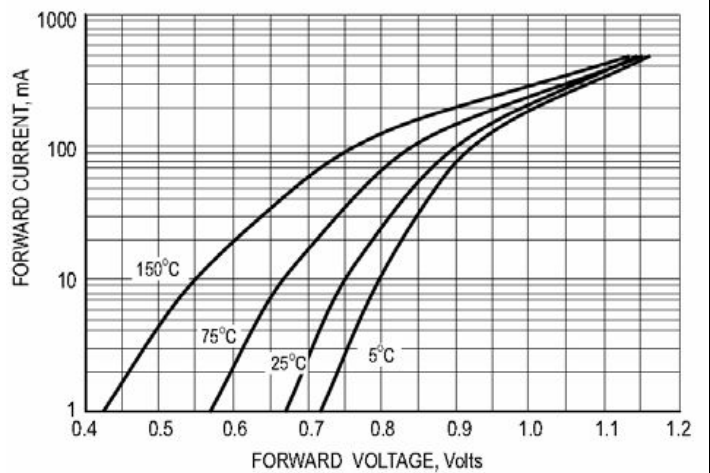

**MMSZ2V4BWF THRU MMSZ75VBWF**  
**Typical Characteristics**

**Fig.7 TYPICAL LEAKGE CURRENT**

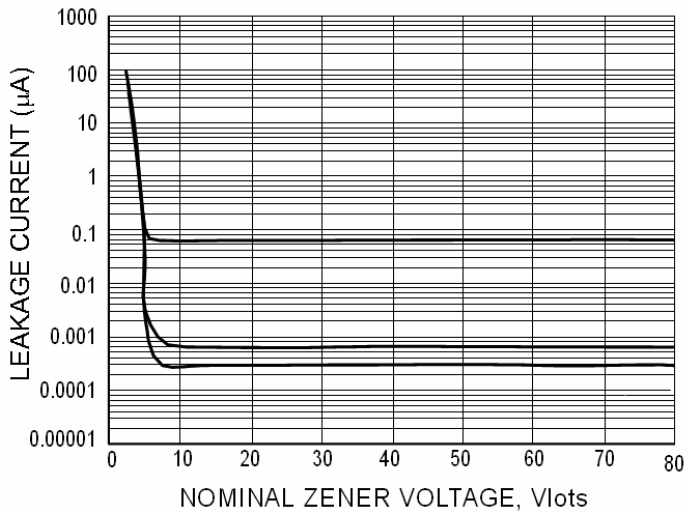

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.