

**SURFACE MOUNT
SUPER FAST RECTIFIERS**

**REVERSE VOLTAGE – 50 to 600 Volts
FORWARD CURRENT – 2.0 Amperes**


FEATURES

- Glass passivated chip
- Super fast switching for high efficiency
- For surface mounted applications
- Low forward voltage drop and high current capability
- Low reverse leakage current

MECHANICAL DATA

- Case :molded plastic
- Case Material: "Green" molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl.) "Halogen-free"
- Polarity : Indicated by cathode band
- Weight : 0.07grams(Approximate)
- Moisture Sensitivity: Level 1 per J-STD-020C
- Lead free finish, RoHS compliant

SMA

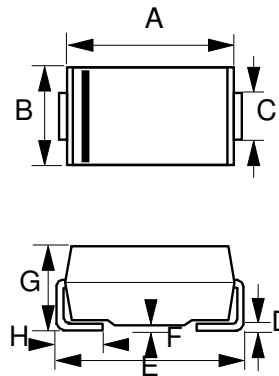

| SMA | | |
|-----|------|------|
| DIM | MIN | MAX |
| A | 4.06 | 4.57 |
| B | 2.29 | 2.92 |
| C | 1.27 | 1.63 |
| D | 0.15 | 0.31 |
| E | 4.83 | 5.59 |
| F | 0.05 | 0.20 |
| G | 2.01 | 2.40 |
| H | 0.76 | 1.52 |

All dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

| MARKING CODE | | ES2AA | ES2BA | ES2CA | ES2DA | ES2GA | ES2JA | |
|--|----------------|-------------|-------|-------|-------|-------|-------|------|
| PARAMETER | SYMBOL | VALUE | | | | | | UNIT |
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 150 | 200 | 400 | 600 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 150 | 200 | 400 | 600 | V |
| Maximum Average rectified output current | $I_{(AV)}$ | 2.0 | | | | | | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load. | I_{FSM} | 50 | | | | | | A |
| Operating and Storage temperature range | T_J, T_{STG} | -55 to +150 | | | | | | °C |

STATIC ELECTRICAL CHARACTERISTICS

| PARAMETER | TEST CONDITION | SYMBOL | MAX | | | UNIT |
|---|-----------------------|--------|------|------|------|------|
| Forward voltage (Note1) | $I_F=2A, T_J=25°C$ | V_F | 0.92 | 1.25 | 1.30 | V |
| Maximum DC Reverse current at Rated DC Blocking voltage | $T_J=25°C, T_J=125°C$ | I_R | 5.0 | 200 | | uA |
| Typical junction capacitance (Note 2) | | C_j | 25 | | | pF |

THERMAL CHARACTERISTICS

| PARAMETER | SYMBOL | TYP | | UNIT |
|------------------------------------|------------|-----|----|------|
| Typical thermal resistance (Note3) | R_{thJL} | 20 | 25 | °C/W |

DYNAMIC ELECTRICAL CHARACTERISTICS

| PARAMETER | TEST CONDITION | SYMBOL | MAX | | UNIT |
|-----------------------|------------------------------------|----------|-----|----|------|
| Reverse Recovery Time | $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$ | T_{rr} | 25 | 35 | nS |

Note :

- (1) 300us pulse width, 2% duty cycle.
- (2) Measured at 1.0MHz and applied reverse voltage of 4.0 V_{DC}
- (3) Thermal Resistance Junction to Lead

REV.-9 ,Sep.-2017, KSGA02

RATING AND CHARACTERISTIC CURVES ES2AA thru ES2JA



FIG.1- FORWARD CURRENT DERATING CURVE

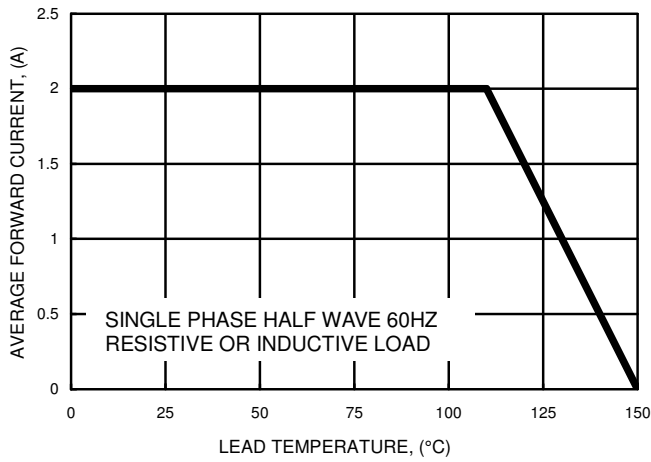


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

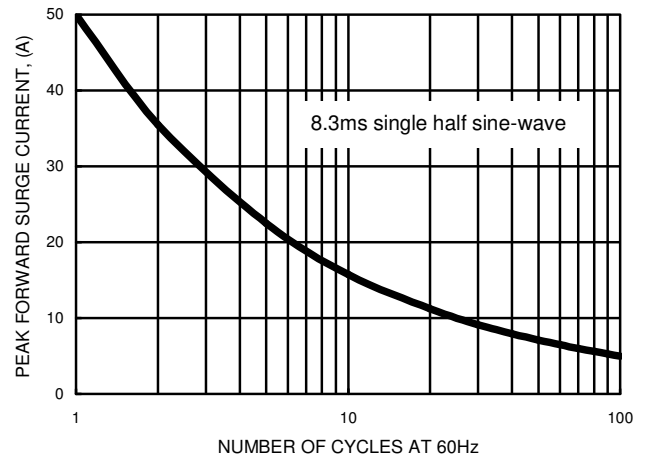


FIG.3- TYPICAL FORWARD CHARACTERISTICS


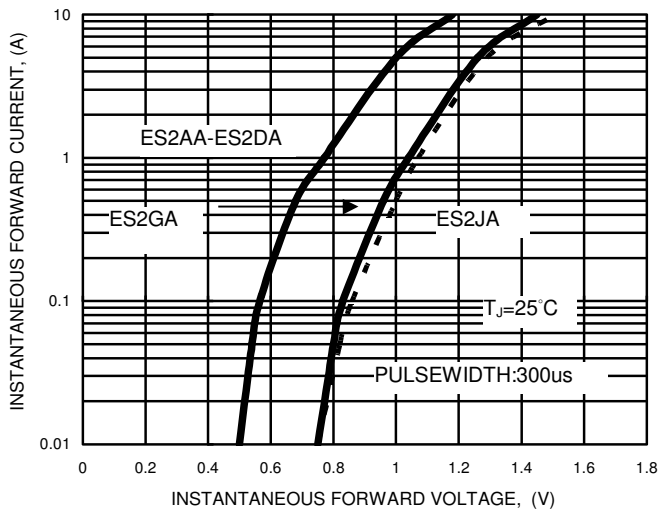


FIG.4- TYPICAL REVERSE CHARACTERISTICS

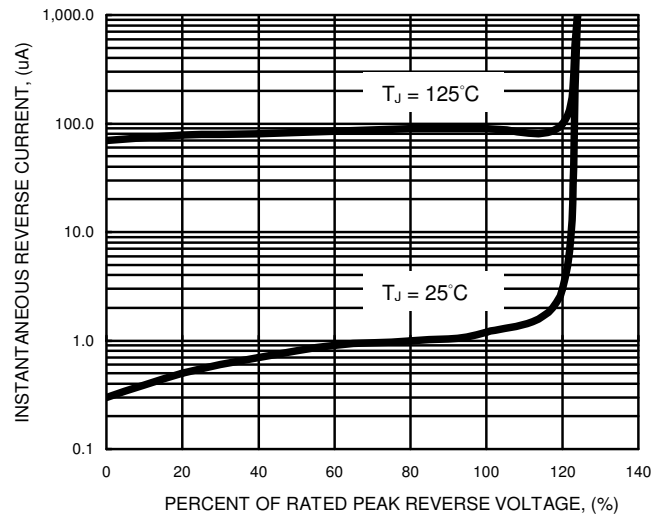

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.