

## Description

The AP7380 series is a positive voltage regulator IC.

The AP7380 has features of wide input voltage range, high accuracy, low dropout voltage, current limit and ultra-low quiescent current which make it ideal for use in various USB and portable devices and instrument application.

The IC consists of a voltage reference, an error amplifier, a resistor network for setting output voltage, a current limit circuit for current protection, and a chip enable circuit.

The AP7380 is available in 1.8V, 3.0V, 3.3V, 3.6V, 4.15V, 4.4V and 5.0V fixed output voltage versions.

The AP7380 is available in space-saving SOT25 and SOT89 (Option 2) packages.

## Features


- Wide Input Voltage Range: Up to 24V
- Low Dropout Voltage:  $V_{DROP} = 500mV @ I_{OUT} = 50mA$
- Low Ground Current
- High Output Voltage Accuracy
- Compatible with Low ESR Ceramic Capacitor
- Excellent Line/Load Regulation
- Thermal Shutdown Function
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

## Applications

- Battery-powered Equipment
- Laptop, Palmtops, Notebook Computers
- Portable Information Appliances


## Pin Assignments

(Top View)




**SOT89 (Option 2)**

(Top View)

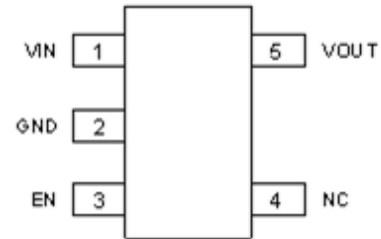

**SOT25 (W5 Package)**



(Top View)

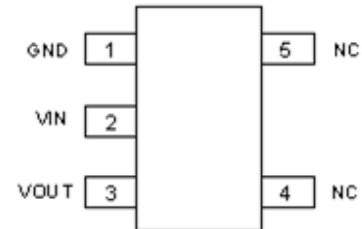

**SOT25 (WR Package)**

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
  2. See [http://www.diodes.com/quality/lead\\_free.html](http://www.diodes.com/quality/lead_free.html) for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

**Typical Applications Circuit**

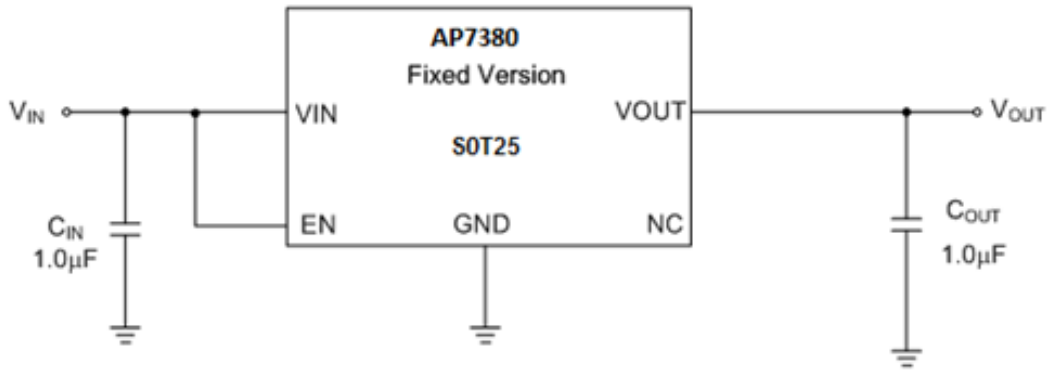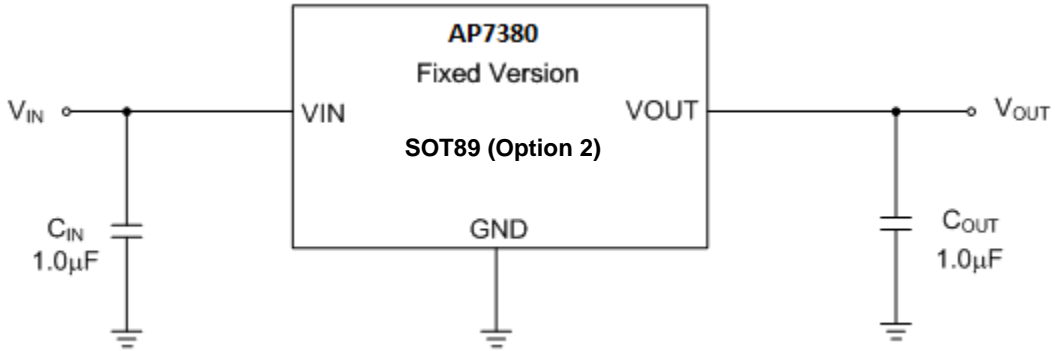

**Pin Descriptions**

| Pin Number |            |                  | Pin Name | Function                       |
|------------|------------|------------------|----------|--------------------------------|
| SOT25 (W5) | SOT25 (WR) | SOT89 (Option 2) |          |                                |
| 1          | 2          | 2                | VIN      | Input voltage                  |
| 2          | 1          | 1                | GND      | Ground                         |
| 3          | —          | —                | EN       | Enable input                   |
| 4          | 4, 5       | —                | NC       | No connected for fixed version |
| 5          | 3          | 3                | VOUT     | Regulated output voltage       |

NEW PRODUCT

### Absolute Maximum Ratings

| Symbol        | Parameter                                | Rating           |     | Unit |
|---------------|--|------------------|-----|------|
| $V_{IN}$      | Supply Input Voltage                     | 30               |     | V    |
| $V_{EN}$      | Enable Input Voltage                     | 30               |     | V    |
| $I_{OUT}$     | Output Current                           | 200              |     | mA   |
| $T_{LEAD}$    | Lead Temperature (Soldering, 10sec)      | +260             |     | °C   |
| $T_J$         | Operating Junction Temperature           | +150             |     | °C   |
| $\theta_{JA}$ | Thermal Resistance (Junction to Ambient) | SOT25 (W5)       | 193 | °C/W |
|               |  | SOT25 (WR)       | 166 |      |
|               |  | SOT89 (Option 2) | 118 |      |
| $\theta_{JC}$ | Thermal Resistance (Junction to Case)    | SOT25 (W5)       | 68  | °C/W |
|               |  | SOT25 (WR)       | 26  |      |
|               |  | SOT89 (Option 2) | 20  |      |
| $T_{STG}$     | Storage Temperature Range                | -65 to +150      |     | °C   |
| —             | ESD (Machine Model)                      | 250              |     | V    |
| —             | ESD (Human Body Model)                   | 2500             |     | V    |

### Recommended Operating Conditions

| Symbol   | Parameter                      | Min | Max  | Unit |
|----------|--------------------------------|-----|------|------|
| $V_{IN}$ | Supply Input Voltage           | 3.5 | 24   | V    |
| $T_J$    | Operating Junction Temperature | -40 | +125 | °C   |


**Electrical Characteristics** (@  $V_{IN} = V_{OUT} + 2V$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 1.0\mu F$ , Typical  $T_J = +25^\circ C$ , unless otherwise specified.)

| Symbol                                     | Parameter                              | Test Conditions  | Min                   | Typ       | Max                    | Unit            |    |
|--|--|--|-----------------------|-----------|------------------------|-----------------|----|
| $V_{OUT}$                                  | Output Voltage                         | $V_{IN} = V_{OUT} + 2V$ , $I_{OUT} = 10mA$<br>Variation from Specified $V_{OUT}$ | $V_{OUT} \times 99\%$ | $V_{OUT}$ | $V_{OUT} \times 101\%$ | V               |    |
| $V_{IN}$                                   | Input Voltage                          | —  | 3.5                   | —         | 24                     | V               |    |
| $I_{LIMIT}$                                | Current Limit                          | $V_{IN} = V_{OUT} + 2V$ , $V_{OUT1} = 98\% \times V_{OUT}$                       | 150                   | —         | —                      | mA              |    |
| $\Delta V_{OUT} / \Delta V_{IN} / V_{OUT}$ | Line Regulation                        | $V_{OUT} + 2V \leq V_{IN} \leq 24V$ , $I_{OUT} = 10mA$                           | —                     | 0.05      | —                      | %/V             |    |
| $\Delta V_{OUT} / V_{OUT}$                 | Load Regulation                        | $V_{IN} = V_{OUT} + 2V$ , $1mA \leq I_{OUT} \leq 150mA$                          | —                     | 0.5       | —                      | %               |    |
| $V_{DROP}$                                 | Dropout Voltage                        | $3.0V \leq V_{OUT} < 5.0V$   | $I_{OUT} = 50mA$      | —         | 360                    | 580             | mV |
|  |  |  | $I_{OUT} = 100mA$     | —         | 750                    | 1000            | mV |
|  |  |  | $I_{OUT} = 150mA$     | —         | 1050                   | 1500            | mV |
|  |  | $V_{OUT} = 5.0V$   | $I_{OUT} = 50mA$      | —         | 250                    | 500             | mV |
|  |  |  | $I_{OUT} = 100mA$     | —         | 550                    | 750             | mV |
|  |  |  | $I_{OUT} = 150mA$     | —         | 750                    | 1100            | mV |
| $I_{GND}$                                  | Ground Current                         | $I_{OUT} = 0A$   | —                     | 1.8       | 3.0                    | $\mu A$         |    |
|  |  | $I_{OUT} = 150mA$  | —                     | 1.8       | 3.0                    |                 |    |
| $I_{STD}$                                  | Standby Current                        | $V_{EN}$ in OFF Mode   | —                     | 0.01      | —                      | $\mu A$         |    |
| $\Delta V_{OUT} / (V_{OUT} \Delta T)$      | Output Voltage Temperature Coefficient | $I_{OUT} = 100\mu A$ , $-40^\circ C \leq T_J \leq +125^\circ C$                  | —                     | $\pm 100$ | —                      | ppm/ $^\circ C$ |    |
| $I_{EN}$                                   | EN Pin Current                         | —  | —                     | 1         | —                      | $\mu A$         |    |
| —  | EN "High" Voltage                      | EN Input Voltage "High"  | 2.0                   | —         | —                      | V               |    |
| —  | EN "Low" Voltage                       | EN Input Voltage "Low"   | —                     | —         | 0.4                    | V               |    |
| $T_{OTSD}$                                 | Thermal Shutdown Temperature           | —  | —                     | +160      | —                      | $^\circ C$      |    |
| $T_{HYOTSD}$                               | Thermal Shutdown Hysteresis            | —  | —                     | +20       | —                      | $^\circ C$      |    |


Performance Characteristics

NEW PRODUCT


Output Voltage vs. Input Voltage @-40°C

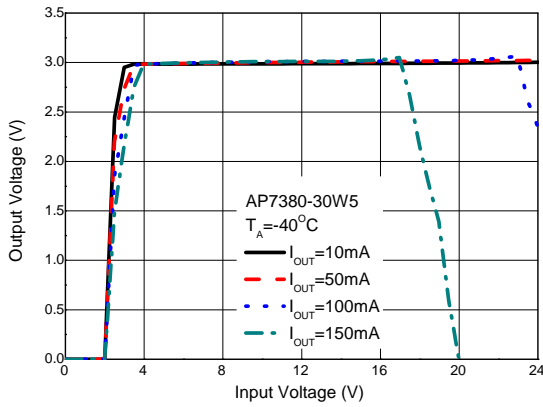


Output Voltage vs. Input Voltage @+25°C

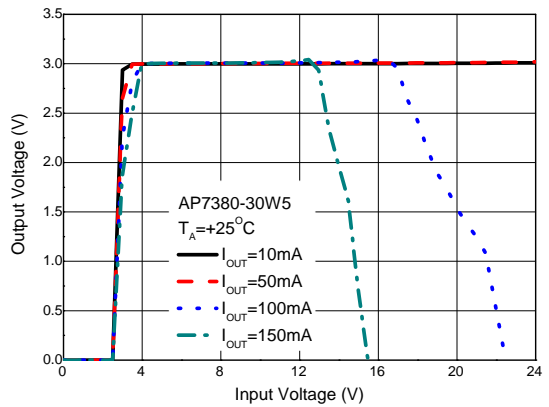


Output Voltage vs. Input Voltage @+85°C

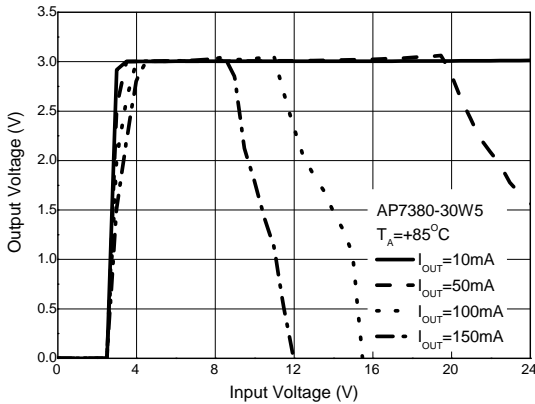


Output Voltage vs. Output Current

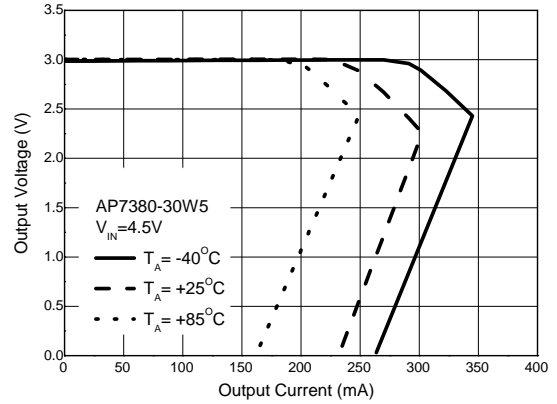

Output Voltage vs. Temperature

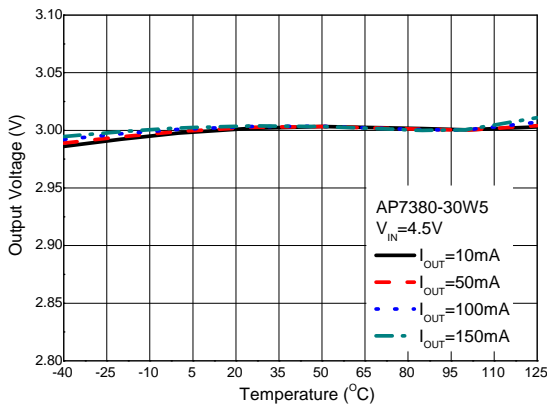


Output Voltage vs. Output Current

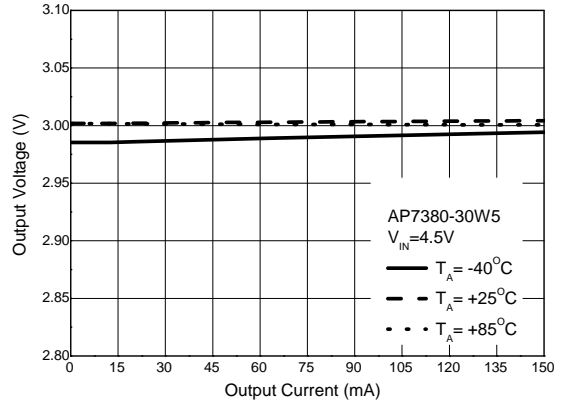


**Performance Characteristics (Cont.)**


**Dropout Voltage vs. Output Current**

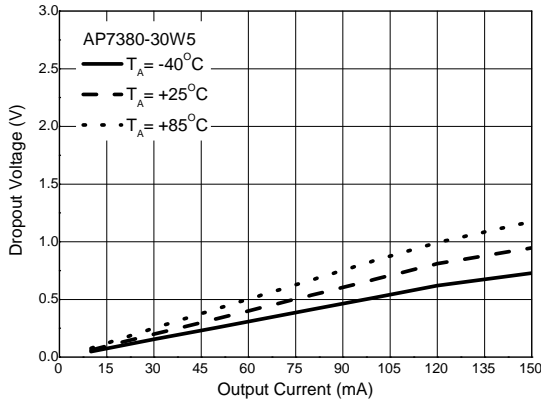


**Dropout Voltage vs. Temperature**

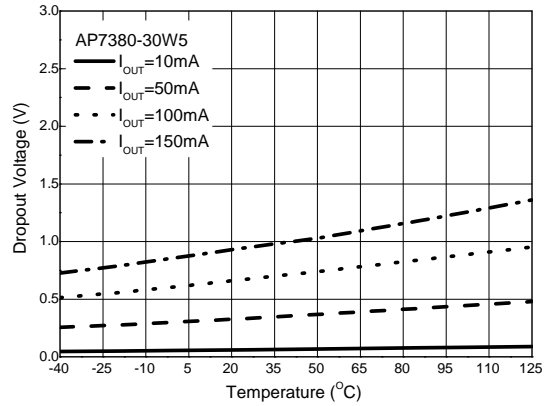


**$I_{GND}$  vs. Input Voltage**

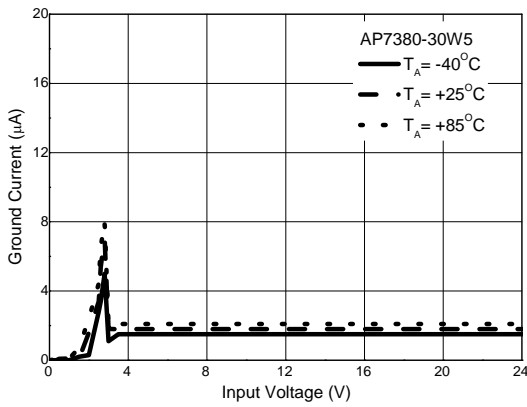

**$I_{GND}$  vs. Output Current**

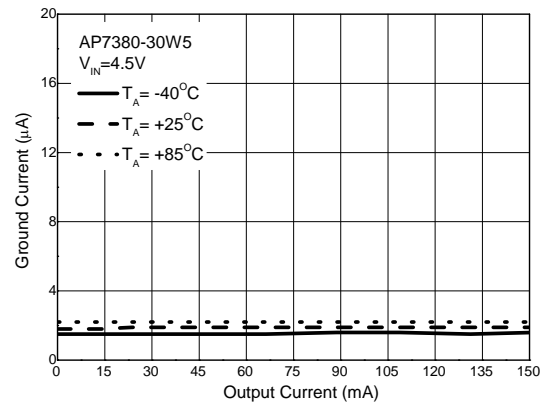


**$I_{GND}$  vs Temperature**

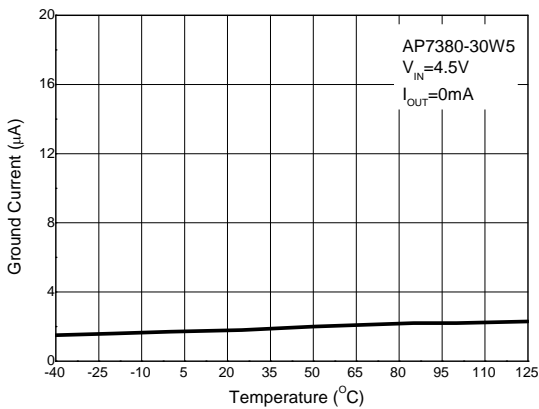


**Load Transient**

$C_{IN} = 1\mu\text{F}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $V_{IN} = V_{OUT} + 1.5\text{V to } 24\text{V}$ ,  $I_{OUT} = 0 \text{ to } 50\text{mA}$

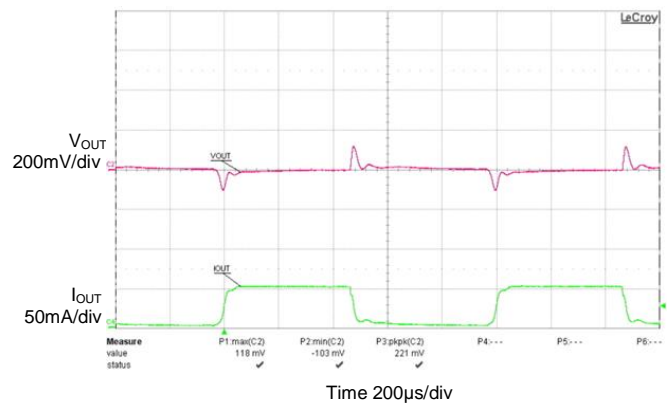

Ordering Information

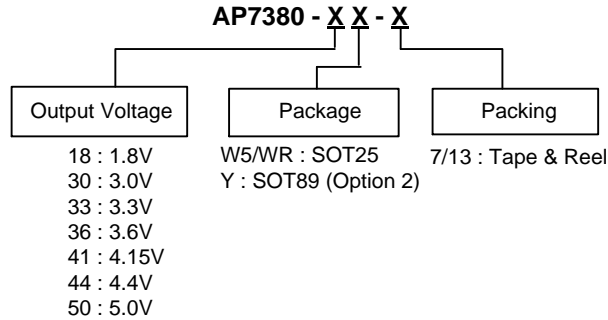


NEW PRODUCT

| Part Number   | Package Code | Package          | 7"/13" Tape and Reel |                    |
|---------------|--------------|------------------|----------------------|--------------------|
|               |              |                  | Quantity             | Part Number Suffix |
| AP7380-18W5-7 | W5           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-30W5-7 | W5           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-33W5-7 | W5           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-36W5-7 | W5           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-41W5-7 | W5           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-44W5-7 | W5           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-50W5-7 | W5           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-18WR-7 | WR           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-30WR-7 | WR           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-33WR-7 | WR           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-36WR-7 | WR           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-41WR-7 | WR           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-44WR-7 | WR           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-50WR-7 | WR           | SOT25            | 3000/Tape & Reel     | -7                 |
| AP7380-18Y-13 | Y            | SOT89 (Option 2) | 2500/Tape & Reel     | -13                |
| AP7380-30Y-13 | Y            | SOT89 (Option 2) | 2500/Tape & Reel     | -13                |
| AP7380-33Y-13 | Y            | SOT89 (Option 2) | 2500/Tape & Reel     | -13                |
| AP7380-36Y-13 | Y            | SOT89 (Option 2) | 2500/Tape & Reel     | -13                |
| AP7380-41Y-13 | Y            | SOT89 (Option 2) | 2500/Tape & Reel     | -13                |
| AP7380-44Y-13 | Y            | SOT89 (Option 2) | 2500/Tape & Reel     | -13                |
| AP7380-50Y-13 | Y            | SOT89 (Option 2) | 2500/Tape & Reel     | -13                |

**Marking Information**

(1) SOT25

(Top View)




XXX : Identification Code  
Y : Year 0 to 9  
W : Week : A to Z : 1 to 26 week;  
a to z : 27 to 52 week; z represents 52 and 53 week  
X : Internal Code

| Part Number   | Package | Identification Code |
|---------------|---------|---------------------|
| AP7380-18W5-7 | SOT25   | D8M                 |
| AP7380-30W5-7 | SOT25   | D8E                 |
| AP7380-33W5-7 | SOT25   | D8A                 |
| AP7380-36W5-7 | SOT25   | D8P                 |
| AP7380-41W5-7 | SOT25   | D8F                 |
| AP7380-44W5-7 | SOT25   | D8G                 |
| AP7380-50W5-7 | SOT25   | D8B                 |
| AP7380-18WR-7 | SOT25   | D8N                 |
| AP7380-30WR-7 | SOT25   | D8H                 |
| AP7380-33WR-7 | SOT25   | D8C                 |
| AP7380-36WR-7 | SOT25   | D8R                 |
| AP7380-41WR-7 | SOT25   | D8J                 |
| AP7380-44WR-7 | SOT25   | D8K                 |
| AP7380-50WR-7 | SOT25   | D8D                 |

(2) SOT89 (Option 2)

(Top View)




XXX : Identification code  
Y : Year : 0~9  
W : Week : A~Z : 1~26 week;  
a~z : 27~52 week;  
z represents 52 and 53 week  
X : Internal code

| Part Number   | Package          | Identification Code |
|---------------|------------------|---------------------|
| AP7380-18Y-13 | SOT89 (Option 2) | D8M                 |
| AP7380-30Y-13 | SOT89 (Option 2) | D8E                 |
| AP7380-33Y-13 | SOT89 (Option 2) | D8A                 |
| AP7380-36Y-13 | SOT89 (Option 2) | D8P                 |
| AP7380-41Y-13 | SOT89 (Option 2) | D8F                 |
| AP7380-44Y-13 | SOT89 (Option 2) | D8G                 |
| AP7380-50Y-13 | SOT89 (Option 2) | D8B                 |



**Package Outline Dimensions** (All dimensions in mm.)

(1) Package Type: SOT89

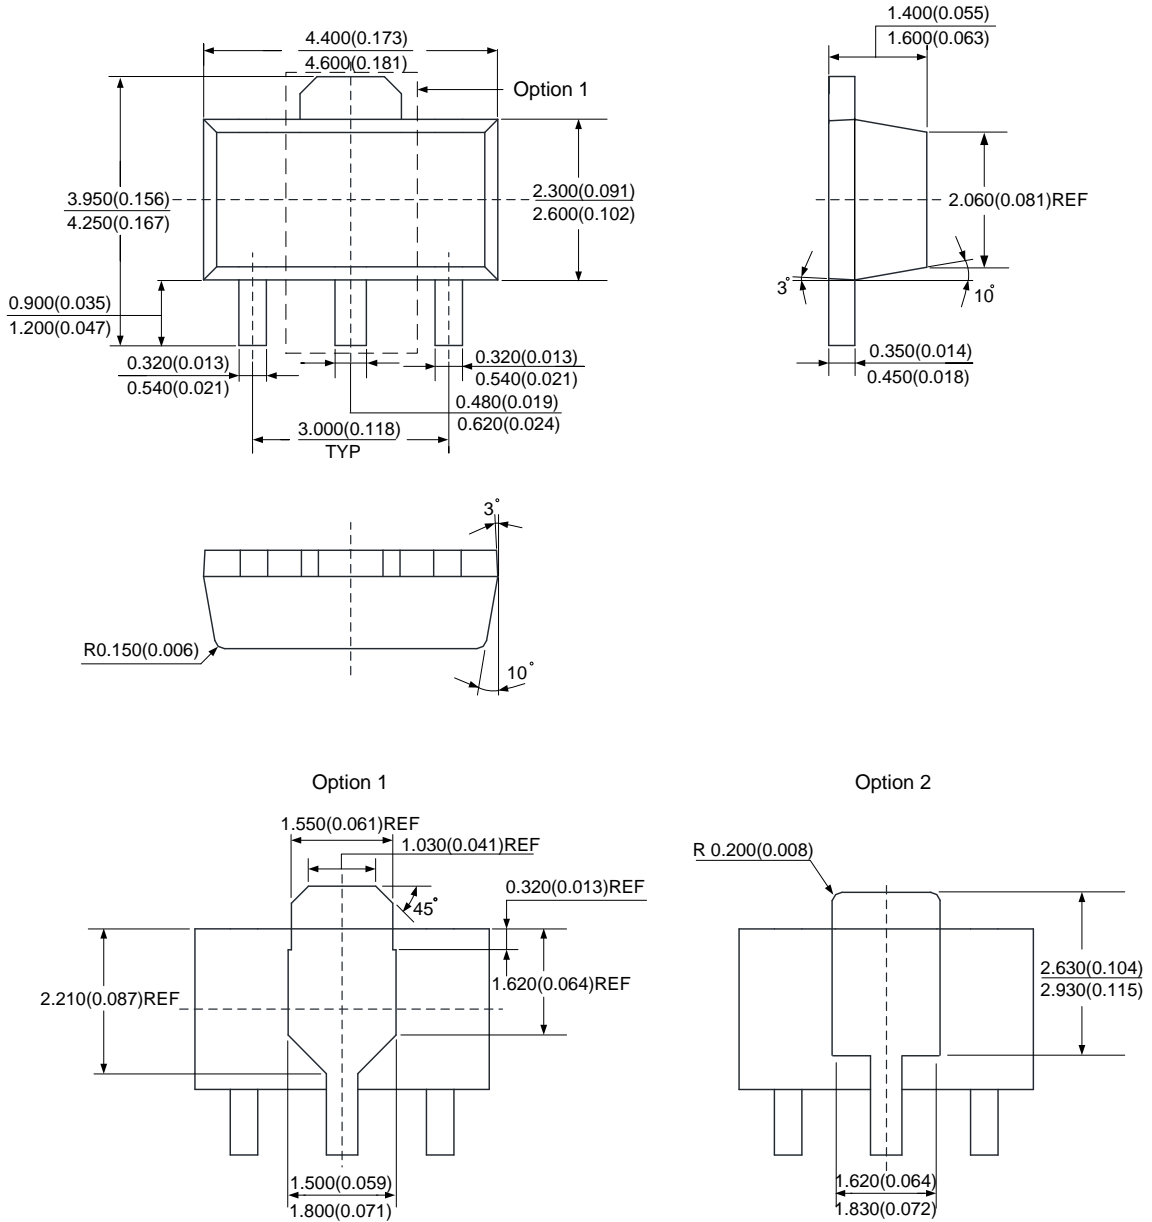


NEW PRODUCT

**Package Outline Dimensions (Cont.)**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(2) Package Type: SOT25

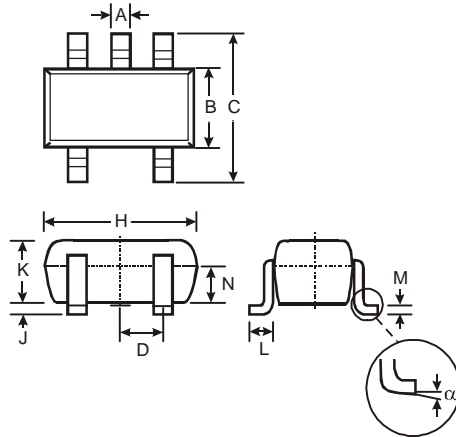


| SOT25                |       |      |      |
|----------------------|-------|------|------|
| Dim                  | Min   | Max  | Typ  |
| A                    | 0.35  | 0.50 | 0.38 |
| B                    | 1.50  | 1.70 | 1.60 |
| C                    | 2.70  | 3.00 | 2.80 |
| D                    | -     | -    | 0.95 |
| H                    | 2.90  | 3.10 | 3.00 |
| J                    | 0.013 | 0.10 | 0.05 |
| K                    | 1.00  | 1.30 | 1.10 |
| L                    | 0.35  | 0.55 | 0.40 |
| M                    | 0.10  | 0.20 | 0.15 |
| N                    | 0.70  | 0.80 | 0.75 |
| α                    | 0°    | 8°   | -    |
| All Dimensions in mm |       |      |      |

**Suggested Pad Layout**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.


(1) Package Type: SOT25



| Dimensions | Value |
|------------|-------|
| Z          | 3.20  |
| G          | 1.60  |
| X          | 0.55  |
| Y          | 0.80  |
| C1         | 2.40  |
| C2         | 0.95  |

**Suggested Pad Layout (Cont.)**

(2) Package Type: SOT89

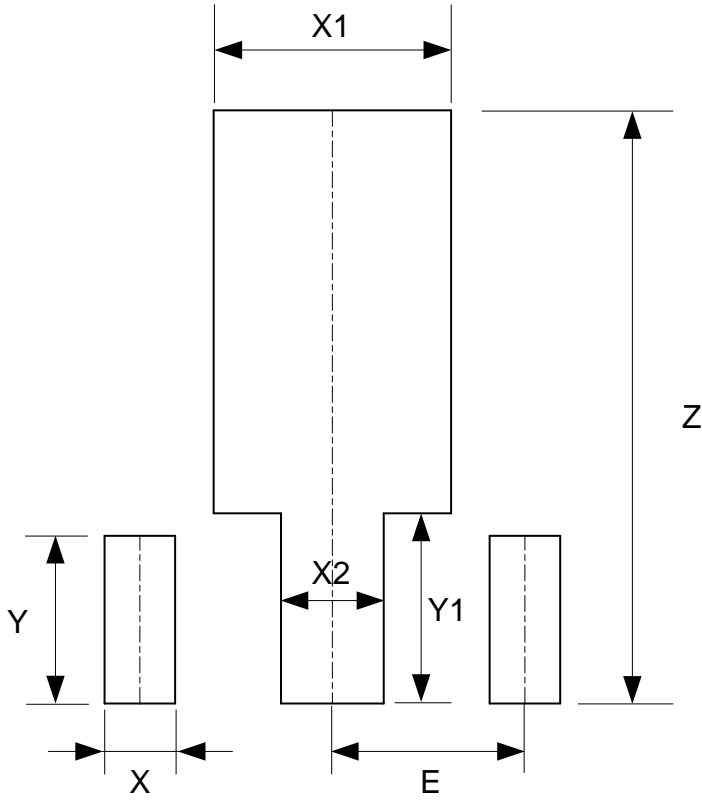

| Dimensions | Z<br>(mm)/(inch) | X<br>(mm)/(inch) | X1<br>(mm)/(inch) | X2<br>(mm)/(inch) | Y<br>(mm)/(inch) | Y1<br>(mm)/(inch) | E<br>(mm)/(inch) |
|------------|------------------|------------------|-------------------|-------------------|------------------|-------------------|------------------|
| Value      | 4.600/0.181      | 0.550/0.022      | 1.850/0.073       | 0.800/0.031       | 1.300/0.051      | 1.475/0.058       | 1.500/0.059      |

NEW PRODUCT

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2017, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)