

GLASS PASSIVATED UNIDIRECTIONAL AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

REVERSE VOLTAGE - 6.8 to 550 Volts
POWER DISSIPATION - 600 WATTS


FEATURES

- Glass passivated chip
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- The plastic material has U/L recognition 94V-0
- Fast response time
- Qualified to AEC-Q101 Rev_C
- IEC6100-4-2, >±30KV(air); >±30KV(Contact)

MECHANICAL DATA

- Case : Molded Plastic
- Marking : Unidirectional - type number and cathode band Bidirectional - type number only
- Weight : 0.4 grams

DO-15

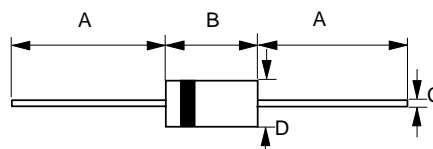

| DO-15 | | |
|------------------------------|--------------------|--------------------|
| Dim. | Min. | Max. |
| A | 25.4 | - |
| B | 5.80 | 7.60 |
| C | 0.71 \varnothing | 0.86 \varnothing |
| D | 2.60 \varnothing | 3.60 \varnothing |
| All Dimensions in millimeter | | |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| CHARACTERISTICS | SYMBOLS | VALUE | UNIT |
|---|------------------|-------------|------|
| Peak Power Dissipation at TA = 25°C, TP = 1ms (Note 1) | PPK | 600 | W |
| Peak Forward Surge Current 8.3ms single half sine-wave @ TA = 25°C (Note 2) | IFSM | 100 | A |
| Steady State Power Dissipation at TL =100°C on infinite heatsink | PM(AV) | 5.0 | W |
| Maximum Instantaneous forward voltage at 16A for unidirectional devices only (Note 3) | VF | 2.5 | V |
| Typical Thermal Resistance (Note 4) | R _{θJC} | 20 | C/W |
| | R _{θJL} | 15 | |
| | R _{θJA} | 50 | |
| Operating Temperature Range | TJ | -55 to +175 | C |
| Storage Temperature Range | TSTG | -55 to +175 | C |

NOTES : 1. Non-repetitive current pulse, per fig. 5 and derated above TJ= 25°C per Fig. 1

2. Uni-directional units only.

3. VF max=2.5V at IF=16 A 300us square wave pulse.

4. Thermal Resistance Junction to Case, Lead and Ambient.

REV. 15, Jan-2017, KDID02

FIG.1 - PULSE DERATING CURVE

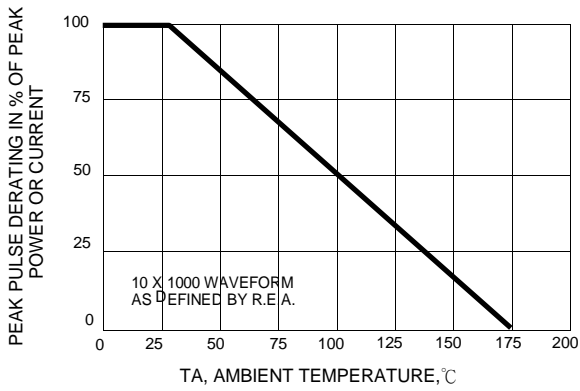


FIG.2 - TYPICAL JUNCTION CAPACITANCE

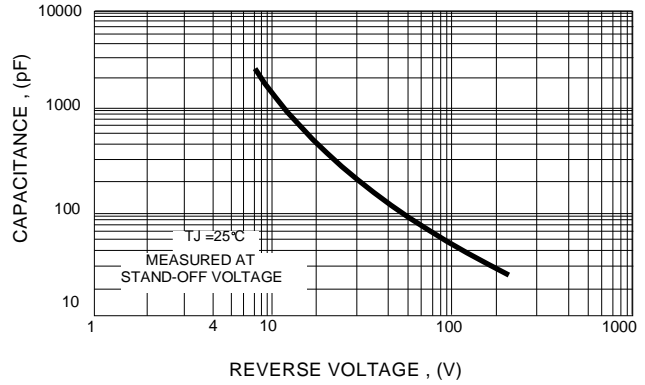


FIG.3 - PULSE RATING CURVE

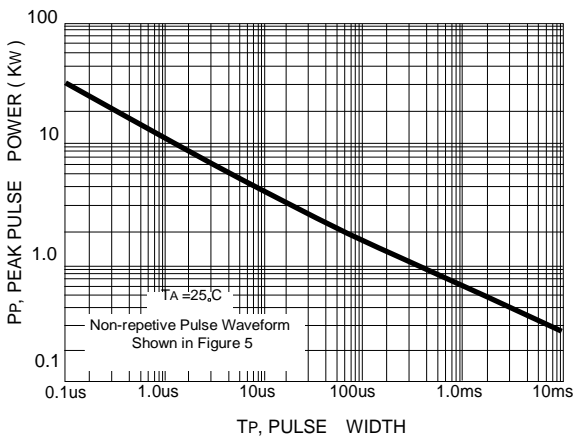


FIG.4 - STEADY STATE POWER DERATING CURVE


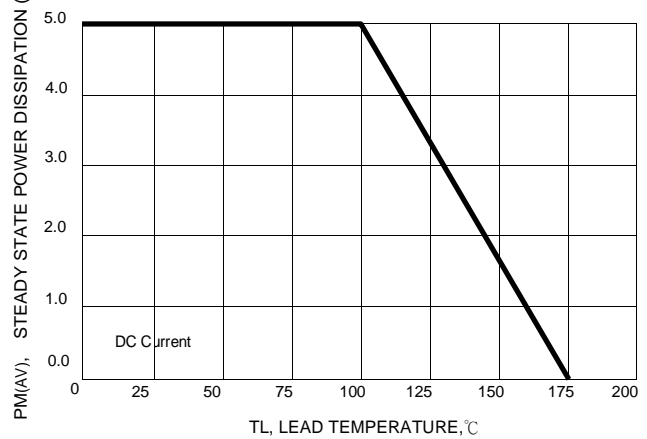


FIG.5 - PULSE WAVEFORM

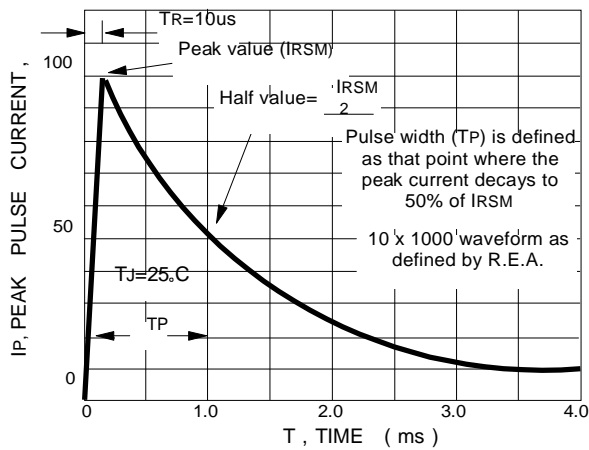

| Type Number | Type Number | Reverse Standoff Voltage | Breakdown Voltage BV Volts @It | | | Max. Reverse Leakage @VR | Max. Peak Pulse Current | Max. Clamping Voltage @Ipp | Max. Voltage Temp. Variation of Bv |
|-------------|-------------|--------------------------|--------------------------------|---------|---------|--------------------------|-------------------------|----------------------------|------------------------------------|
| | | | Min (V) | Max (V) | It (mA) | | | | |
| (UNI) | (BI) | VR (V) | Min (V) | Max (V) | It (mA) | IR (uA) | Ipp (A) | Vc (V) | %/°C |
| P6KE6.8A | P6KE6.8CA | 5.8 | 6.45 | 7.13 | 10 | 1000 | 57.1 | 10.5 | 0.057 |
| P6KE7.5A | P6KE7.5CA | 6.4 | 7.13 | 7.88 | 10 | 500 | 53.1 | 11.3 | 0.061 |
| P6KE8.2A | P6KE8.2CA | 7.0 | 7.79 | 8.61 | 10 | 200 | 49.6 | 12.1 | 0.065 |
| P6KE9.1A | P6KE9.1CA | 7.8 | 8.65 | 9.56 | 1 | 50 | 44.8 | 13.4 | 0.068 |
| P6KE10A | P6KE10CA | 8.6 | 9.50 | 10.50 | 1 | 10 | 41.4 | 14.5 | 0.073 |
| P6KE11A | P6KE11CA | 9.4 | 10.5 | 11.6 | 1 | 5 | 38.5 | 15.6 | 0.075 |
| P6KE12A | P6KE12CA | 10.2 | 11.4 | 12.6 | 1 | 0.5 | 35.9 | 16.7 | 0.078 |
| P6KE13A | P6KE13CA | 11.1 | 12.4 | 13.7 | 1 | 0.5 | 33.0 | 18.2 | 0.081 |
| P6KE15A | P6KE15CA | 12.8 | 14.3 | 15.8 | 1 | 0.5 | 28.3 | 21.2 | 0.084 |
| P6KE16A | P6KE16CA | 13.6 | 15.2 | 16.8 | 1 | 0.5 | 26.7 | 22.5 | 0.086 |
| P6KE18A | P6KE18CA | 15.3 | 17.1 | 18.9 | 1 | 0.5 | 23.8 | 25.2 | 0.088 |
| P6KE20A | P6KE20CA | 17.1 | 19.0 | 21.0 | 1 | 0.5 | 21.7 | 27.7 | 0.090 |
| P6KE22A | P6KE22CA | 18.8 | 20.9 | 23.1 | 1 | 0.5 | 19.6 | 30.6 | 0.092 |
| P6KE24A | P6KE24CA | 20.5 | 22.8 | 25.2 | 1 | 0.5 | 18.1 | 33.2 | 0.094 |
| P6KE27A | P6KE27CA | 23.1 | 25.7 | 28.4 | 1 | 0.5 | 16.0 | 37.5 | 0.096 |
| P6KE30A | P6KE30CA | 25.6 | 28.5 | 31.5 | 1 | 0.5 | 14.5 | 41.4 | 0.097 |
| P6KE33A | P6KE33CA | 28.2 | 31.4 | 34.7 | 1 | 0.5 | 13.1 | 45.7 | 0.098 |
| P6KE36A | P6KE36CA | 30.8 | 34.2 | 37.8 | 1 | 0.5 | 12.0 | 49.9 | 0.099 |
| P6KE39A | P6KE39CA | 33.3 | 37.1 | 41.0 | 1 | 0.5 | 11.1 | 53.9 | 0.100 |
| P6KE43A | P6KE43CA | 36.8 | 40.9 | 45.2 | 1 | 0.5 | 10.1 | 59.3 | 0.101 |
| P6KE47A | P6KE47CA | 40.2 | 44.7 | 49.4 | 1 | 0.5 | 9.3 | 64.8 | 0.101 |
| P6KE51A | P6KE51CA | 43.6 | 48.5 | 53.6 | 1 | 0.5 | 8.6 | 70.1 | 0.102 |
| P6KE56A | P6KE56CA | 47.8 | 53.2 | 58.8 | 1 | 0.5 | 7.8 | 77.0 | 0.103 |
| P6KE62A | P6KE62CA | 53.0 | 58.9 | 65.1 | 1 | 0.5 | 7.1 | 85.0 | 0.104 |
| P6KE68A | P6KE68CA | 58.1 | 64.6 | 71.4 | 1 | 0.5 | 6.5 | 92.0 | 0.104 |
| P6KE75A | P6KE75CA | 64.7 | 71.3 | 78.8 | 1 | 0.5 | 5.8 | 103.0 | 0.105 |
| P6KE82A | P6KE82CA | 70.1 | 77.9 | 86.1 | 1 | 0.5 | 5.3 | 113.0 | 0.105 |
| P6KE91A | P6KE91CA | 77.8 | 86.5 | 95.6 | 1 | 0.5 | 4.8 | 125.0 | 0.106 |
| P6KE100A | P6KE100CA | 85.5 | 95.0 | 105.0 | 1 | 0.5 | 4.4 | 137.0 | 0.106 |
| P6KE110A | P6KE110CA | 94.0 | 105.0 | 116.1 | 1 | 0.5 | 3.9 | 152.0 | 0.107 |
| P6KE120A | P6KE120CA | 102.0 | 114.0 | 126.0 | 1 | 0.5 | 3.6 | 165.0 | 0.107 |
| P6KE130A | P6KE130CA | 111.0 | 124.0 | 137.1 | 1 | 0.5 | 3.4 | 179.0 | 0.107 |
| P6KE150A | P6KE150CA | 128.0 | 143.0 | 158.1 | 1 | 0.5 | 2.9 | 207.0 | 0.108 |
| P6KE160A | P6KE160CA | 136.0 | 152.0 | 168.0 | 1 | 0.5 | 2.7 | 219.0 | 0.108 |
| P6KE170A | P6KE170CA | 145.0 | 162.0 | 179.1 | 1 | 0.5 | 2.6 | 234.0 | 0.108 |
| P6KE180A | P6KE180CA | 154.0 | 171.0 | 189.0 | 1 | 0.5 | 2.4 | 246.0 | 0.108 |
| P6KE200A | P6KE200CA | 171.0 | 190.0 | 210.0 | 1 | 0.5 | 2.2 | 274.0 | 0.108 |
| P6KE220A | P6KE220CA | 185.0 | 209.0 | 231.0 | 1 | 0.5 | 1.8 | 328.0 | 0.108 |
| P6KE250A | P6KE250CA | 214.0 | 237.0 | 262.0 | 1 | 0.5 | 1.7 | 344.0 | 0.110 |
| P6KE300A | P6KE300CA | 256.0 | 285.0 | 315.0 | 1 | 0.5 | 1.4 | 414.0 | 0.110 |
| P6KS300A | P6KS300CA | 256.0 | 285.0 | 315.0 | 1 | 0.5 | 1.4 | 414.0 | 0.110 |
| P6KE350A | P6KE350CA | 300.0 | 332.0 | 367.0 | 1 | 0.5 | 1.2 | 482.0 | 0.110 |
| P6KS350A | P6KS350CA | 300.0 | 332.0 | 367.0 | 1 | 0.5 | 1.2 | 482.0 | 0.110 |
| P6KE400A | P6KE400CA | 342.0 | 380.0 | 420.0 | 1 | 0.5 | 1.1 | 548.0 | 0.110 |
| P6KS400A | P6KS400CA | 342.0 | 380.0 | 420.0 | 1 | 0.5 | 1.1 | 548.0 | 0.110 |
| P6KE440A | P6KE440CA | 376.0 | 418.0 | 462.0 | 1 | 0.5 | 1.0 | 600.0 | 0.110 |
| P6KS440A | P6KS440CA | 376.0 | 418.0 | 462.0 | 1 | 0.5 | 1.0 | 600.0 | 0.110 |
| P6KE480A | P6KE480CA | 408.0 | 456.0 | 504.0 | 1 | 0.5 | 0.91 | 658.0 | 0.110 |
| P6KE550A | P6KE550CA | 467.5 | 522.5 | 577.5 | 1 | 0.5 | 0.80 | 753.5 | 0.113 |

NOTE :

Suffix 'A' denotes 5% tolerance device.

1. Add suffix 'C' or 'CA' after part number to specify Bi-directional devices.
2. The IR limit is double for Bi-Directional devices.

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.