

**HIGH VOLTAGE HIGH SENSITIVITY  
AUTOMOTIVE HALL EFFECT OMNIPOLAR SWITCH**

**Description**

The AH3563Q is an AEC-Q100 qualified high-voltage, high-sensitivity Hall effect omnipolar switch IC designed for position and proximity sensing in automotive applications, such as in seat and seatbelt buckle, steering lock/immobilization, gear stick, transmission actuator and gear position, HVAC compression, wiper, door/trunk closure, and so on. To support a wide range of demanding applications, the design is optimized to operate over the supply range of 3.0V to 28V. With chopper-stabilized architecture and an internal bandgap regulator to provide temperature compensated supply for internal circuits, the AH3563Q provides a reliable solution over the whole operating range. For robustness and protection, the device has a reverse blocking diode with a zener clamp on the supply. The output has an overcurrent limit and a zener clamp.

The single open-drain output can be switched on with south or north pole of sufficient strength. When the magnetic flux density (B) perpendicular to the package is larger than the operate point (B<sub>OP</sub>), the output is switched on (pulled low) and is held on until the magnetic flux density B is lower than the release point (B<sub>RP</sub>).



**Features**

- Omnipolar Operation
- High Sensitivity: B<sub>OP</sub> and B<sub>RP</sub> of ±30G and ±20G Typical
- Single Open-Drain Output with Overcurrent Limit
- 3.0V to 28V Operating Voltage Range
- Chopper Stabilized Design Provides
  - Superior Temperature Stability
  - Minimal Switch Point Drift
  - Enhanced Immunity to Stress
- Good RF Noise Immunity
- Reverse Blocking Diode
- Zener Clamp on Supply and Output Pins
- -40°C to +150°C Operating Temperature
- ESD: HBM > 8kV, CDM > 2kV
- Industry Standard SOT23 and SIP-3 (Ammo Pack), SIP-3 (Bulk Pack) Packages
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **The AH3563Q is suitable for automotive applications requiring specific change control; this part is AEC-Q100 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.**

<https://www.diodes.com/quality/product-definitions/>

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.  
 2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.  
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


**Pin Assignments**

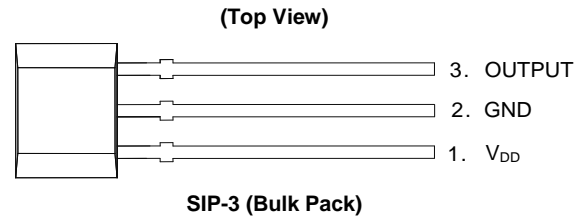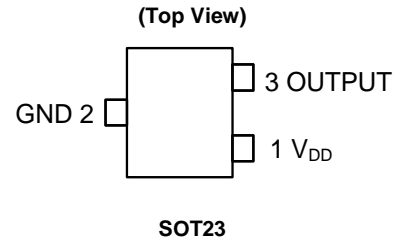

**Applications**

- Position and Proximity Sensing in Automotive Applications
- Open and Close Detect
- Position Detect
- Level Detect
- Flow Meters
- Contactless Switches
- Seatbelt Buckle
- Seat Position

**Typical Applications Circuit**

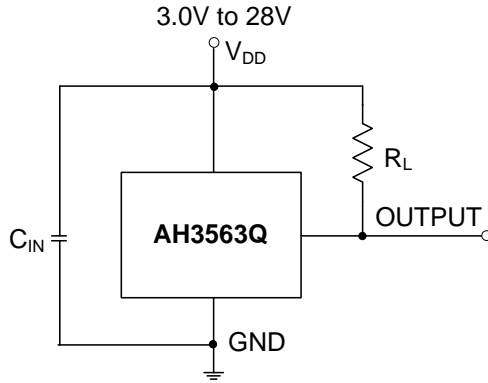


Note: 4.  $C_{IN}$  is for power stabilization and to strengthen the noise immunity; the recommended capacitance is 10nF ~ 100nF.

**Pin Descriptions**

Packages: SOT23 and SIP-3 (Ammo Pack), SIP-3 (Bulk Pack)

| Pin Number | Pin Name        | Function           |
|------------|-----------------|--------------------|
| 1          | V <sub>DD</sub> | Power Supply Input |
| 2          | GND             | Ground             |
| 3          | OUTPUT          | Output Pin         |

**Functional Block Diagram**

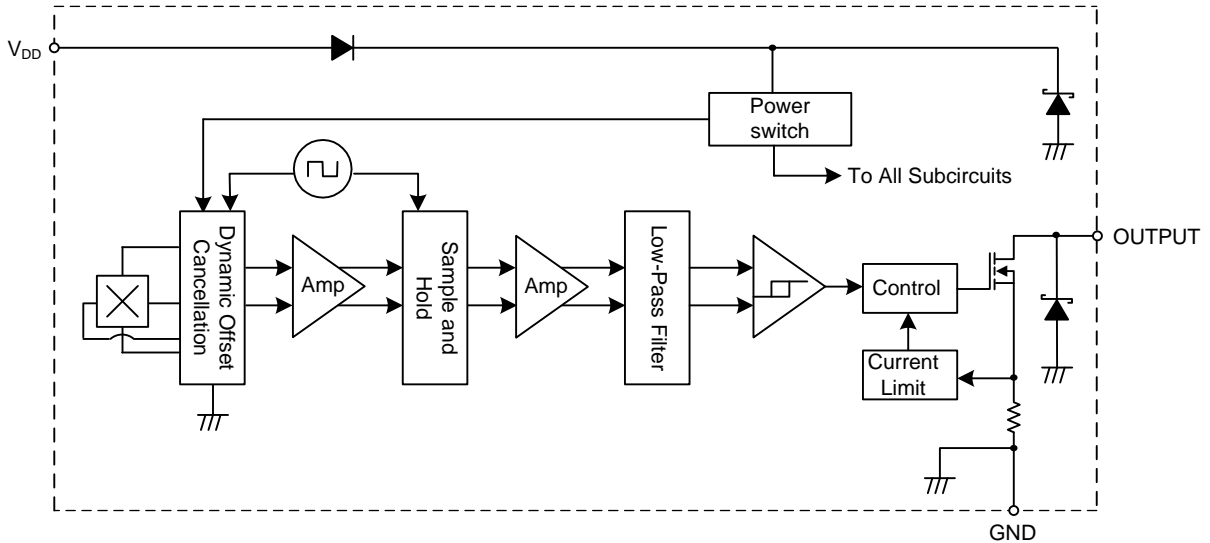

### Absolute Maximum Ratings (Notes 5 and 6) (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Symbol               | Characteristic                                                   | Value                                   | Unit |    |
|----------------------|------------------------------------------------------------------|-----------------------------------------|------|----|
| V <sub>DD</sub>      | Supply Voltage (Note 6)                                          | 32                                      | V    |    |
| V <sub>DDR</sub>     | Reverse Supply Voltage (Note 6)                                  | -32                                     | V    |    |
| V <sub>OUT_MAX</sub> | Output Off Voltage (Note 6)                                      | 32                                      | V    |    |
| I <sub>OUT</sub>     | Continuous Output Current                                        | 60                                      | mA   |    |
| I <sub>OUT_R</sub>   | Reverse Output Current                                           | -50                                     | mA   |    |
| B                    | Magnetic Flux Density                                            | Unlimited                               |      |    |
| P <sub>D</sub>       | Package Power Dissipation                                        | SIP-3 (Ammo Pack),<br>SIP-3 (Bulk Pack) | 550  | mW |
|                      |                                                                  | SOT23                                   | 230  |    |
|                      |                                                                  |                                         |      |    |
| T <sub>S</sub>       | Storage Temperature Range                                        | -65 to +165                             | °C   |    |
| T <sub>J</sub>       | Maximum Junction Temperature                                     | +150                                    | °C   |    |
| ESD HBM              | Electros Static Discharge Withstand — Human Body Model (HBM)     | 8                                       | kV   |    |
| ESD MM               | Electros Static Discharge Withstand — Machine Model (MM)         | 800                                     | V    |    |
| ESD CDM              | Electros Static Discharge Withstand — Charged Device Model (CDM) | 2                                       | kV   |    |

- Notes:
- Stresses greater than the 'Absolute Maximum Ratings' specified above can cause permanent damage to the device. These are stress ratings only; functional operation of the device at these or any other conditions exceeding those indicated in this specification is not implied. Device reliability may be affected by exposure to absolute maximum rating conditions for extended periods of time.
  - The absolute maximum V<sub>DD</sub> of 32V is a transient stress rating and is not meant as a functional operating condition. It is not recommended to operate the device at the absolute maximum rated conditions for any period of time.

### Recommended Operating Conditions (@T<sub>A</sub> = -40°C to +150°C, unless otherwise specified.)

| Symbol          | Parameter                   | Condition | Rating      | Unit |
|-----------------|-----------------------------|-----------|-------------|------|
| V <sub>DD</sub> | Supply Voltage              | Operating | 3.0 to 28   | V    |
| T <sub>A</sub>  | Operating Temperature Range | Operating | -40 to +150 | °C   |

### Electrical Characteristics (Notes 7 and 8) (@T<sub>A</sub> = -40°C to +150°C, V<sub>DD</sub> = 3V to 28V, unless otherwise specified.)

| Symbol              | Parameter                                                                                          | Condition                                                | Min | Typ  | Max  | Unit |
|---------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------|-----|------|------|------|
| V <sub>OUT_ON</sub> | Output On Voltage                                                                                  | I <sub>OUT</sub> = 20mA, B > B <sub>OP</sub>             | —   | 0.2  | 0.4  | V    |
| I <sub>LKG</sub>    | Output Leakage Current (When Output is Off)                                                        | V <sub>OUT</sub> = 28V, B < B <sub>RP</sub> , Output Off | —   | 0.1  | 10   | µA   |
| I <sub>DD</sub>     | Supply Current                                                                                     | Output Open, T <sub>A</sub> = +25°C                      | —   | 3    | 3.5  | mA   |
|                     |                                                                                                    | Output Open, T <sub>A</sub> = -40°C to +150°C            | —   | —    | 4    | mA   |
| I <sub>DD_R</sub>   | Reverse Supply Current                                                                             | V <sub>DD</sub> = -18V, T <sub>A</sub> = +25°C           | —   | 0.6  | —    | µA   |
|                     |                                                                                                    | V <sub>DD</sub> = -18V, T <sub>A</sub> = -40°C to +150°C | —   | 0.6  | 1500 | µA   |
|                     |                                                                                                    | V <sub>DD</sub> = -28V, T <sub>A</sub> = +25°C           | —   | 1.6  | —    | µA   |
|                     |                                                                                                    | V <sub>DD</sub> = -28V, T <sub>A</sub> = -40°C to +150°C | —   | 1.6  | 2500 | µA   |
| t <sub>P_ON</sub>   | Device Power-On Time (Start-up Time)                                                               | V <sub>DD</sub> ≥ 3V, B > B <sub>OP</sub> (Note 7)       | —   | 10   | —    | µs   |
| f <sub>C</sub>      | Chopping Frequency                                                                                 | —                                                        | —   | 800  | —    | kHz  |
| t <sub>D</sub>      | Response Time Delay (Time from Magnetic Threshold Reached to the Start of the Output Rise or Fall) | (Note 9)                                                 | —   | 3.75 | —    | µs   |
| t <sub>R</sub>      | Output Rising Time (External Pull-up Resistor R <sub>L</sub> and Load Capacitance Dependent)       | R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 20pF              | —   | 0.2  | 1    | µs   |
| t <sub>F</sub>      | Output Falling Time (Internal Switch Resistance and Load Capacitance Dependent)                    | R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 20pF              | —   | 0.1  | 1    | µs   |
| I <sub>OCL</sub>    | Output Current Limit                                                                               | B > B <sub>OP</sub> (Note 10)                            | 30  | —    | 55   | mA   |
| V <sub>Z</sub>      | Zener Clamp Voltage                                                                                | I <sub>DD</sub> = 5mA                                    | 28  | —    | —    | V    |



- Notes:
- When power is initially turned on, V<sub>DD</sub> must be within its correct operating range (3.0V to 28V) to guarantee the output sampling. The output state is valid after the start-up time of 10µs typical from the operating voltage reaching 3V.
  - Typical values are defined at T<sub>A</sub> = +25°C, V<sub>DD</sub> = 12V. Maximum and minimum values over the operating temperature range is not tested in production but guaranteed by design, process control, and characterization.
  - Guaranteed by design, process control, and characterization. Not tested in production.
  - The device will limit the output current I<sub>OUT</sub> to current limit of I<sub>OCL</sub>.

**Magnetic Characteristics** (Notes 11 and 12) ( $T_A = -40^\circ\text{C}$  to  $+150^\circ\text{C}$ ,  $V_{DD} = 3.0\text{V}$  to  $28\text{V}$ , unless otherwise specified.)

(1mT = 10 Gauss)


| Symbol                                          | Parameter            | Condition                                         | Min | Typ | Max | Unit  |
|-------------------------------------------------|----------------------|---------------------------------------------------|-----|-----|-----|-------|
| $B_{OPS}$ (South Pole to the Part Marking Side) | Operation Point      | $V_{DD} = 12\text{V}, T_A = +25^\circ\text{C}$    | —   | 30  | —   | Gauss |
|                                                 |                      | $T_A = -40^\circ\text{C}$ to $+150^\circ\text{C}$ | 15  | 30  | 45  |       |
| $B_{OPN}$ (North Pole to the Part Marking Side) |                      | $V_{DD} = 12\text{V}, T_A = +25^\circ\text{C}$    | —   | -30 | —   |       |
|                                                 |                      | $T_A = -40^\circ\text{C}$ to $+150^\circ\text{C}$ | -45 | -30 | -15 |       |
| $B_{RPS}$ (South Pole to the Part Marking Side) | Release Point        | $V_{DD} = 12\text{V}, T_A = +25^\circ\text{C}$    | —   | 20  | —   |       |
|                                                 |                      | $T_A = -40^\circ\text{C}$ to $+150^\circ\text{C}$ | 5   | 20  | 35  |       |
| $B_{RPN}$ (South Pole to the Part Marking Side) |                      | $V_{DD} = 12\text{V}, T_A = +25^\circ\text{C}$    | —   | -20 | —   |       |
|                                                 |                      | $T_A = -40^\circ\text{C}$ to $+150^\circ\text{C}$ | -35 | -20 | -5  |       |
| $B_{HY}$ ( $ B_{OPX}  -  B_{RPX} $ )            | Hysteresis (Note 13) | $V_{DD} = 12\text{V}, T_A = +25^\circ\text{C}$    | —   | 10  | —   |       |
|                                                 |                      | $T_A = -40^\circ\text{C}$ to $+150^\circ\text{C}$ | 5   | 10  | 18  |       |

- Notes:
- When power is initially turned on,  $V_{DD}$  must be within its correct operating range (3.0V to 28V) to guarantee the output sampling. The output state is valid after the start-up time of 10 $\mu\text{s}$  typical from the operating voltage reaching 3V.
  - Typical values are defined at  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 12\text{V}$ . Maximum and minimum values over the operating temperature range is not tested in production but guaranteed by design, process control and characterization.
  - Maximum and minimum hysteresis is guaranteed by design, process control and characterization.

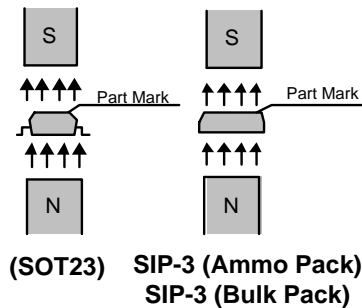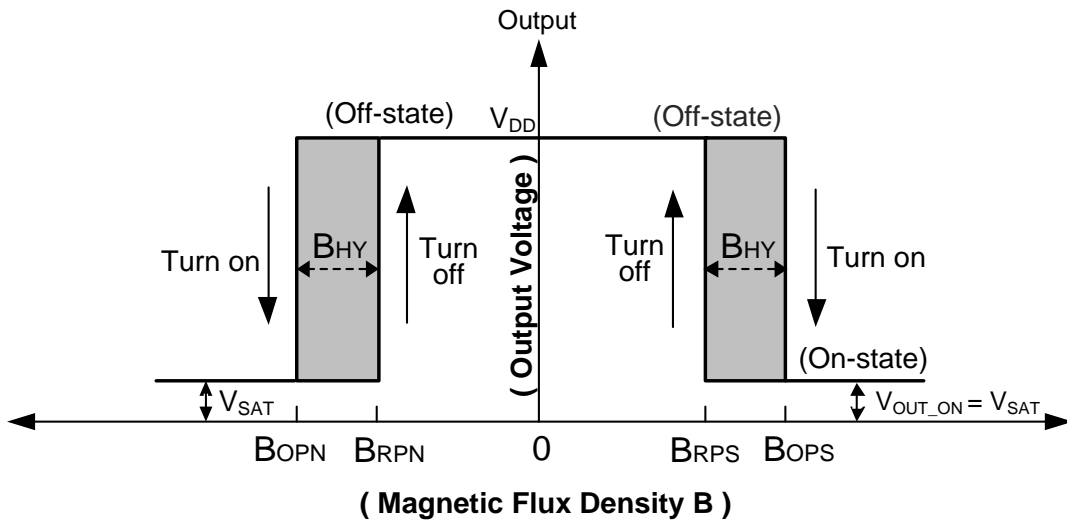


## Typical Operating Characteristics


### Output Switch Operate and Release Points (Magnetic Thresholds) — B<sub>OPS</sub> and B<sub>RPS</sub>

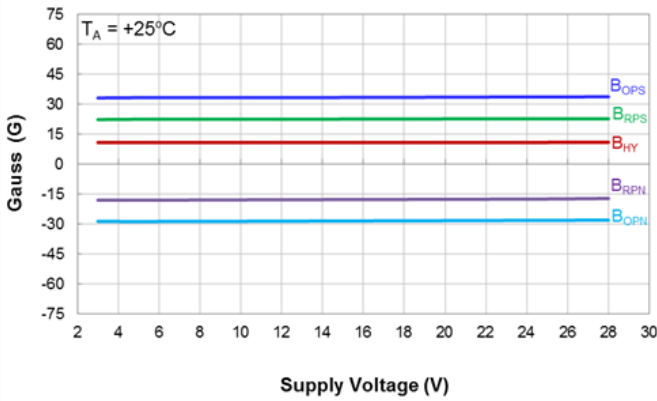


Switch Points  $B_{OPS}$  and  $B_{RPS}$  vs Supply Voltage

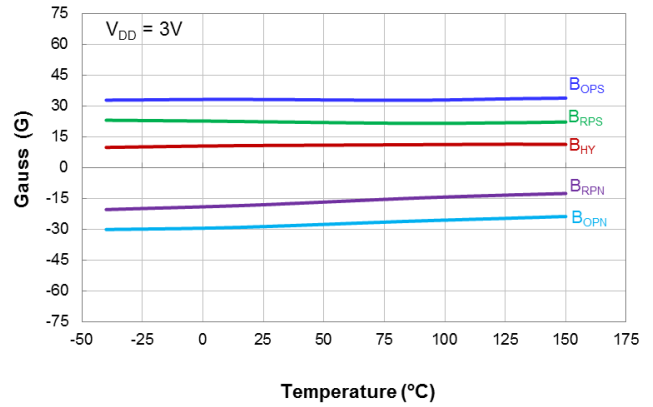

Switch Points  $B_{OPS}$  and  $B_{RPS}$  vs Temperature

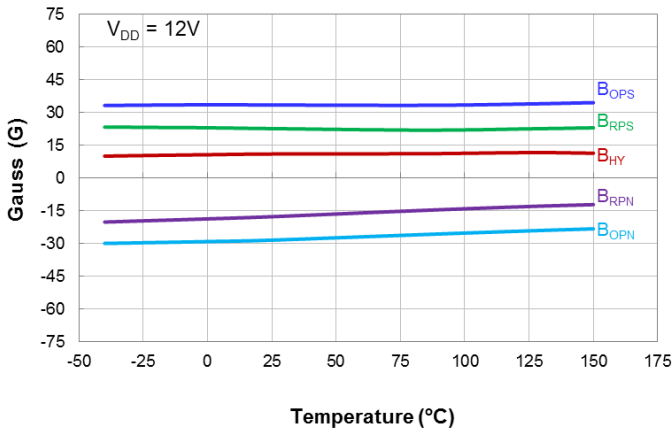


Switch Points  $B_{OPS}$  and  $B_{RPS}$  vs Temperature

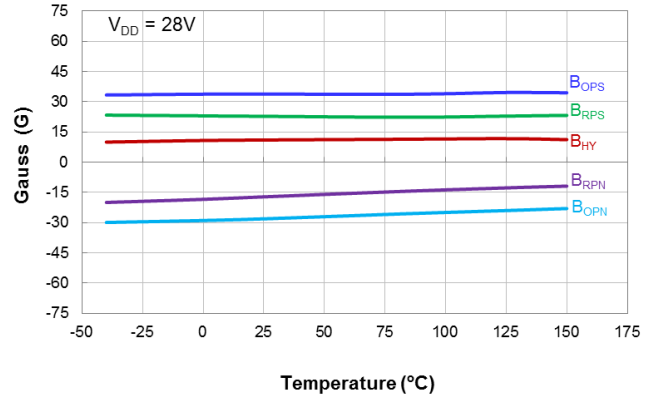


Switch Points  $B_{OPS}$  and  $B_{RPS}$  vs Temperature

### Supply Current

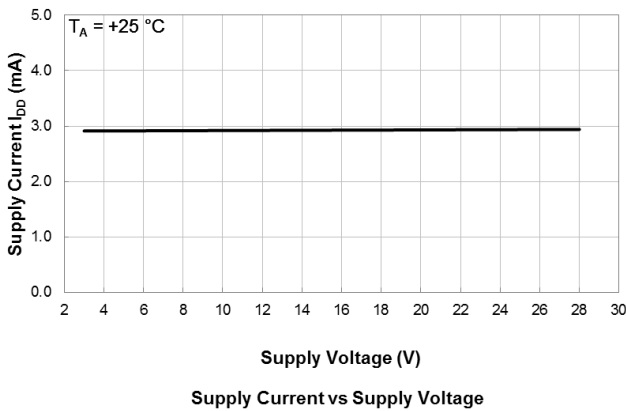


Supply Current vs Supply Voltage

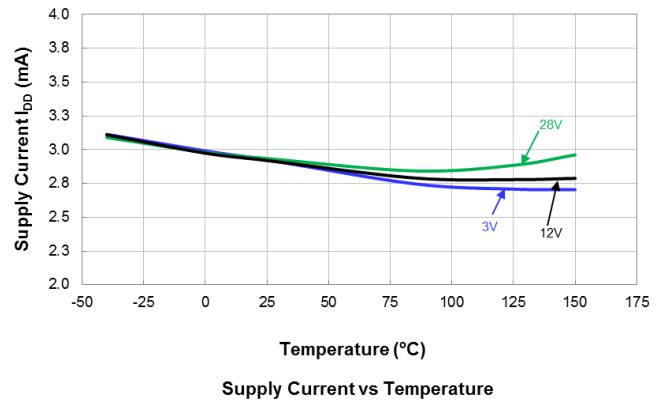


Supply Current vs Temperature

**Typical Operating Characteristics** (Continued)

**Supply Reverse Current**

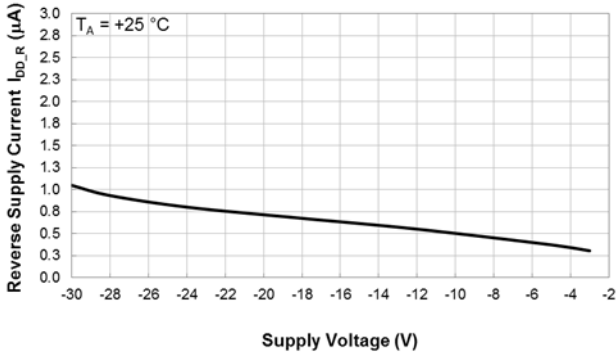


Reverse Supply Current vs Supply Voltage

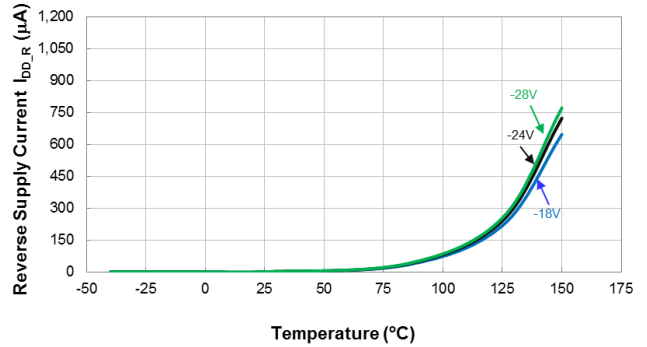


Reverse Supply Current vs Temperature

**Output Switch On Voltage**

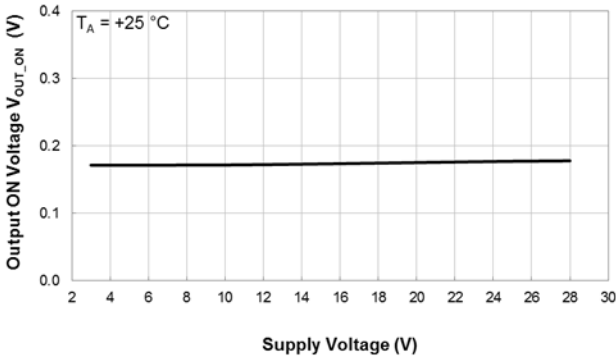


Output ON Voltage vs Supply Voltage

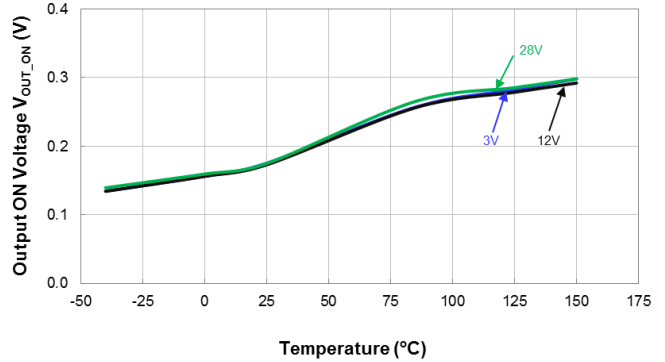


Output ON Voltage vs Temperature

**Output Switch Leakage Current**

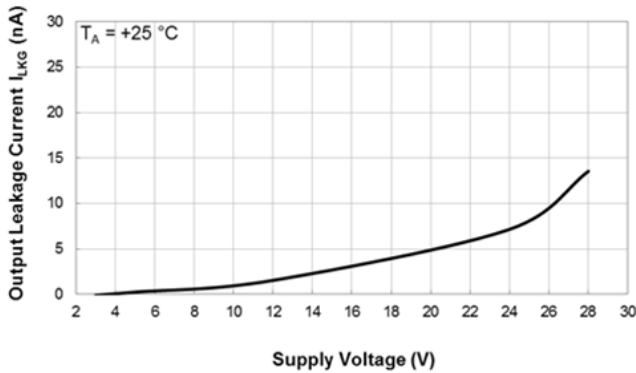


Output Leakage Current vs Supply Voltage

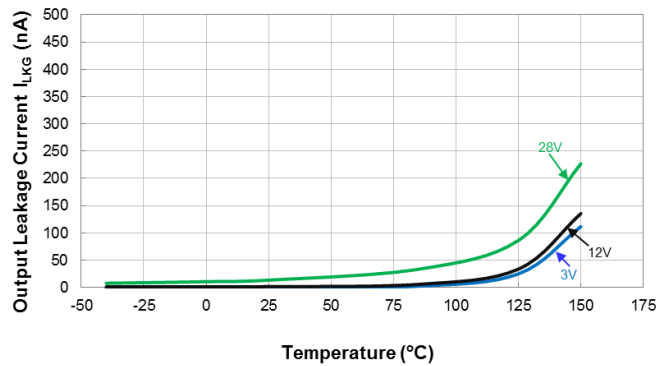


Output Leakage Current vs Temperature

**Typical Operating Characteristics** (Continued)

**Output Current Limit**

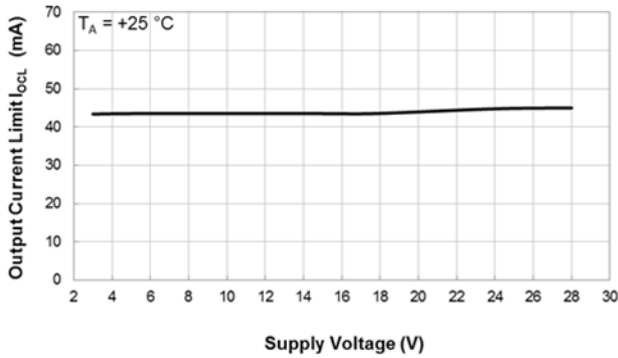

Output Current Limit vs Supply Voltage

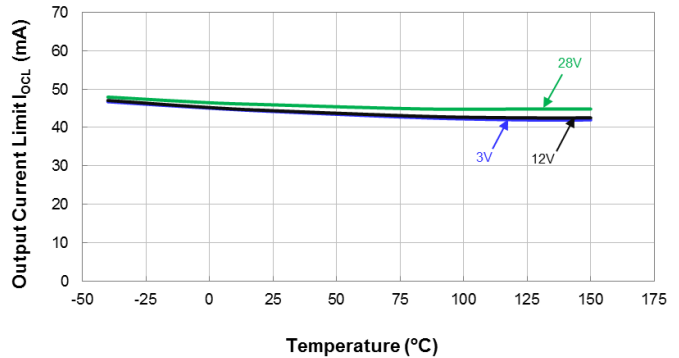


Output Current Limit vs Temperature

**Thermal Performance Characteristics**


(1) Package Type: SOT23

| T <sub>A</sub> (°C) | 25  | 50  | 60  | 70  | 80  | 85  | 90  | 100 | 105 | 110 | 120 | 125 | 130 | 140 | 150 |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| P <sub>D</sub> (mW) | 230 | 184 | 166 | 147 | 129 | 120 | 110 | 92  | 83  | 74  | 55  | 46  | 37  | 18  | 0   |

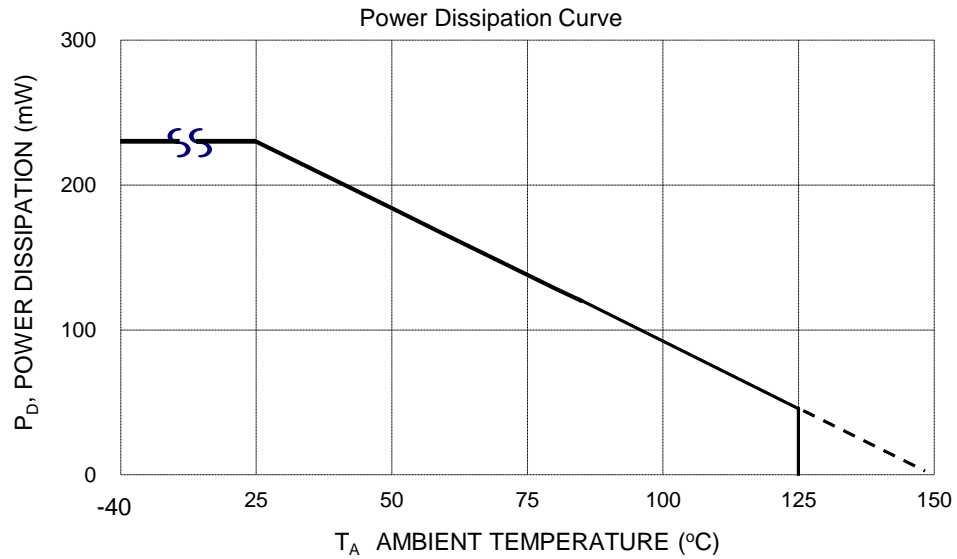


(2) Package Type: SIP-3 (Ammo Pack), SIP-3 (Bulk Pack)

| T <sub>A</sub> (°C) | 25  | 50  | 60  | 70  | 80  | 85  | 90  | 100 | 105 | 110 | 120 | 125 | 130 | 140 | 150 |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| P <sub>D</sub> (mW) | 550 | 440 | 396 | 362 | 308 | 286 | 264 | 220 | 198 | 176 | 132 | 110 | 88  | 44  | 0   |

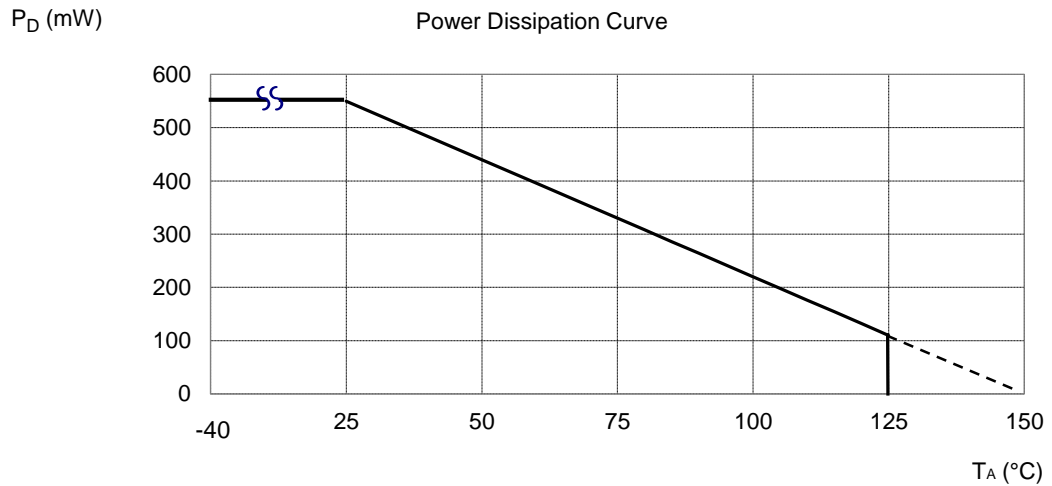



**Ordering Information**

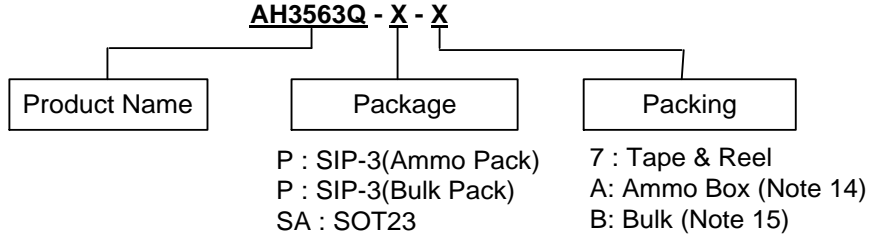


| Part Number  | Package Code | Packaging         | Bulk     |                    | Ammo Box  |                    | 7" Tape and Reel  |                    |
|--------------|--------------|-------------------|----------|--------------------|-----------|--------------------|-------------------|--------------------|
|              |              |                   | Quantity | Part Number Suffix | Quantity  | Part Number Suffix | Quantity          | Part Number Suffix |
| AH3563Q-P-A  | P            | SIP-3 (Ammo Pack) | NA       | NA                 | 4,000/Box | -A                 | NA                | NA                 |
| AH3563Q-P-B  | P            | SIP-3 (Bulk Pack) | 1000     | -B                 | NA        | NA                 | NA                | NA                 |
| AH3563Q-SA-7 | SA           | SOT23             | NA       | NA                 | NA        | NA                 | 3,000/Tape & Reel | -7                 |

Notes: 14. Ammo Box is for SIP-3 (Ammo Pack) Spread Lead.  
15. Bulk is for SIP-3 (Bulk Pack) Straight Lead.


**Marking Information**

(1) Package Type: SOT23

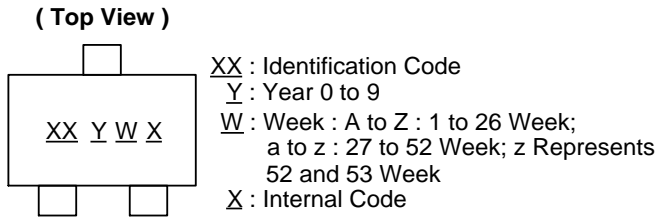

| Part Number  | Package | Identification Code |
|--------------|---------|---------------------|
| AH3563Q-SA-7 | SOT23   | Z3                  |

(2) Package Type: SIP-3 (Ammo Pack), SIP-3 (Bulk Pack)

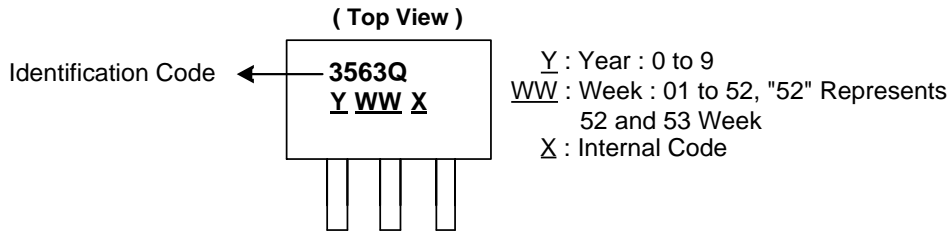


| Part Number | Package           | Identification Code |
|-------------|-------------------|---------------------|
| AH3563Q-P-A | SIP-3 (Ammo Pack) | 3563Q               |
| AH3563Q-P-B | SIP-3 (Bulk Pack) | 3563Q               |


**Package Outline Dimensions** (All dimensions in mm.)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(1) Package Type: SOT23

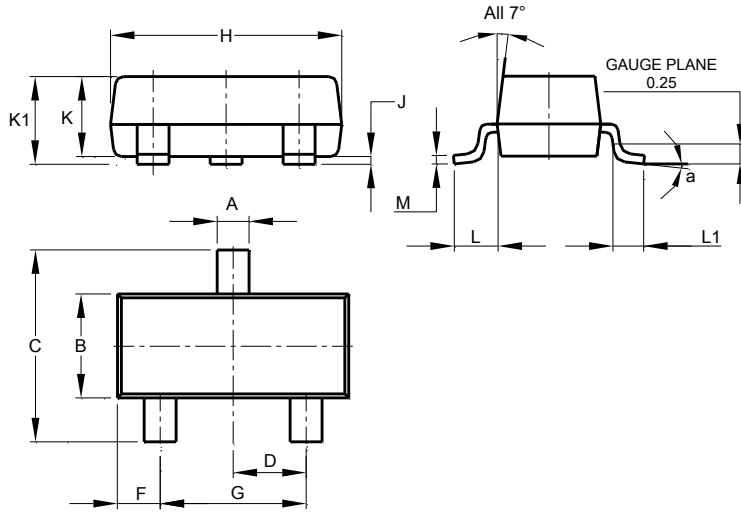

| SOT23                |       |       |       |
|----------------------|-------|-------|-------|
| Dim                  | Min   | Max   | Typ   |
| A                    | 0.37  | 0.51  | 0.40  |
| B                    | 1.20  | 1.40  | 1.30  |
| C                    | 2.30  | 2.50  | 2.40  |
| D                    | 0.89  | 1.03  | 0.915 |
| F                    | 0.45  | 0.60  | 0.535 |
| G                    | 1.78  | 2.05  | 1.83  |
| H                    | 2.80  | 3.00  | 2.90  |
| J                    | 0.013 | 0.10  | 0.05  |
| K                    | 0.890 | 1.00  | 0.975 |
| K1                   | 0.903 | 1.10  | 1.025 |
| L                    | 0.45  | 0.61  | 0.55  |
| L1                   | 0.25  | 0.55  | 0.40  |
| M                    | 0.085 | 0.150 | 0.110 |
| a                    | 0°    | 8°    | —     |
| All Dimensions in mm |       |       |       |

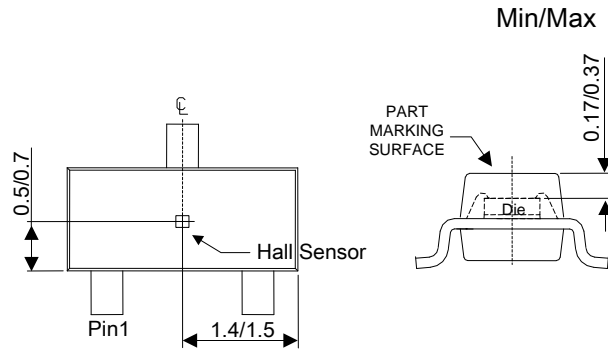


Sensor Location


**Package Outline Dimensions** (Continued) (All dimensions in mm.)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(2) Package Type: SIP-3 (Bulk Pack)

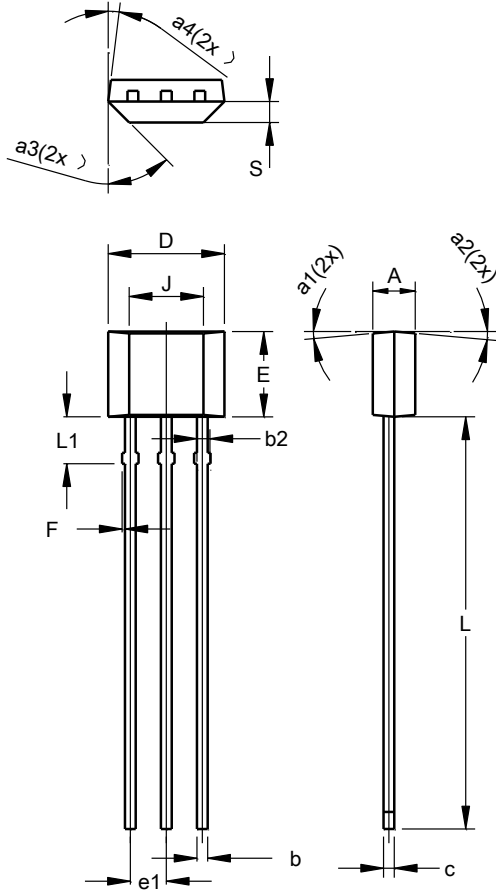

| SIP-3 (Bulk Pack)    |          |       |       |
|----------------------|----------|-------|-------|
| Dim                  | Min      | Max   | Typ   |
| A                    | 1.40     | 1.60  | 1.50  |
| b                    | 0.33     | 0.43  | 0.38  |
| b2                   | 0.40     | 0.508 | 0.46  |
| c                    | 0.35     | 0.41  | 0.38  |
| D                    | 3.90     | 4.30  | 4.10  |
| E                    | 2.80     | 3.20  | 3.00  |
| e1                   | 1.24     | 1.30  | 1.27  |
| F                    | 0.00     | 0.20  | --    |
| J                    | 2.62 REF |       |       |
| L                    | 14.00    | 15.00 | 14.50 |
| L1                   | 1.55     | 1.75  | 1.65  |
| S                    | 0.63     | 0.84  | 0.74  |
| a1                   | --       | --    | 5°    |
| a2                   | --       | --    | 5°    |
| a3                   | --       | --    | 45°   |
| a4                   | --       | --    | 3°    |
| All Dimensions in mm |          |       |       |

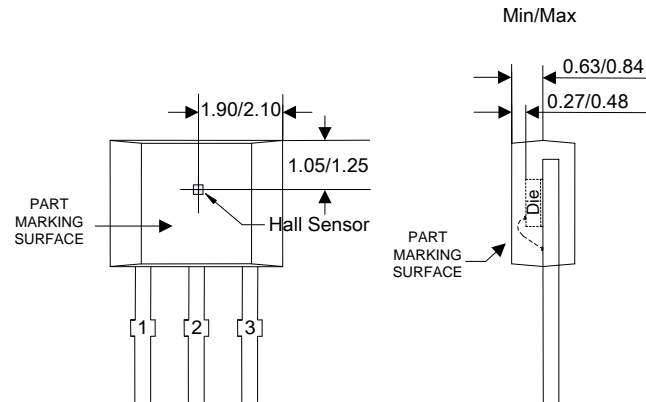


Sensor Location


**Package Outline Dimensions** (Continued) (All dimensions in mm.)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**(3) Package Type: SIP-3 (Ammo Pack)**

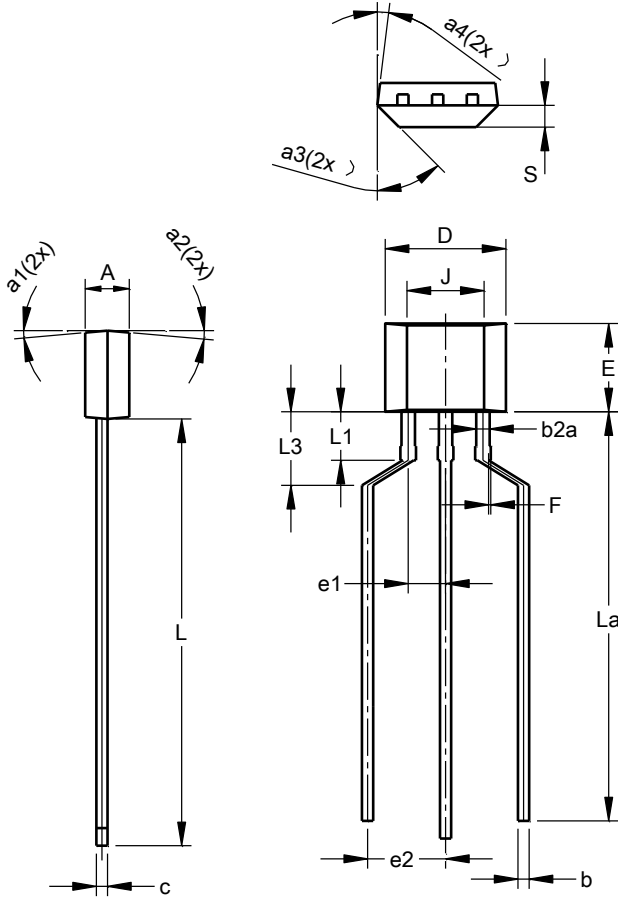

| SIP-3<br>(Ammo Pack) |          |       |       |
|----------------------|----------|-------|-------|
| Dim                  | Min      | Max   | Typ   |
| A                    | 1.40     | 1.60  | 1.50  |
| b                    | 0.33     | 0.43  | 0.38  |
| b2a                  | 0.40     | 0.52  | 0.46  |
| c                    | 0.35     | 0.41  | 0.38  |
| D                    | 3.90     | 4.30  | 4.10  |
| E                    | 2.80     | 3.20  | 3.00  |
| e1                   | 1.24     | 1.30  | 1.27  |
| e2                   | 2.40     | 2.90  | 2.65  |
| F                    | 0.00     | 0.20  | —     |
| J                    | 2.62 REF |       |       |
| L                    | 14.00    | 15.00 | 14.50 |
| La                   | 12.90    | 14.90 | 13.90 |
| L1                   | 1.55     | 1.75  | 1.65  |
| L3                   | 2.00     | 3.00  | 2.50  |
| S                    | 0.63     | 0.84  | 0.74  |
| a1                   | —        | —     | 5°    |
| a2                   | —        | —     | 5°    |
| a3                   | —        | —     | 45°   |
| a4                   | —        | —     | 3°    |
| All Dimensions in mm |          |       |       |

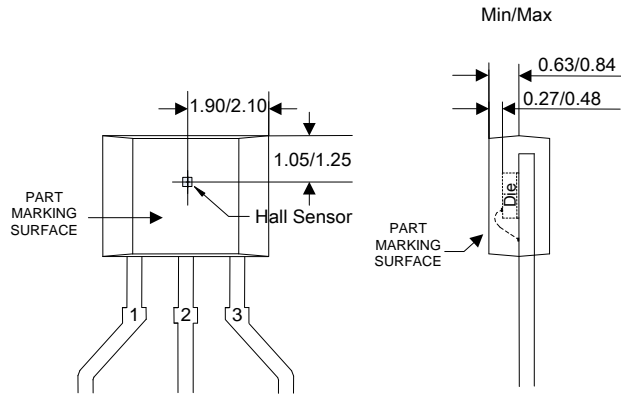


**Sensor Location**

## Suggested Pad Layout

Please see <http://www.diodes.com/package-outlines.html> for the latest version.


### (1) Package Type: SOT23

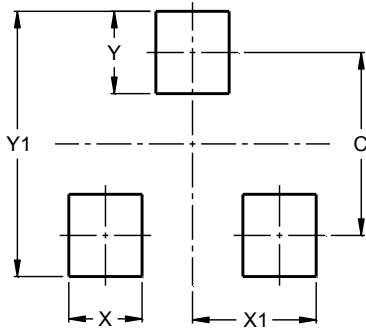


| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 2.0           |
| X          | 0.8           |
| X1         | 1.35          |
| Y          | 0.9           |
| Y1         | 2.9           |

## Mechanical Data

### SOT23 Package

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 
- Weight: 0.009 grams (Approximate)

### SIP-3 (Bulk Pack), SIP-3 (Ammo Pack) Packages

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 
- Weight: 0.12 grams (Approximate)

**IMPORTANT NOTICE**

1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2020 Diodes Incorporated

[www.diodes.com](http://www.diodes.com)