


Major Ratings and Characteristics

Characteristics	30SLJQ060	Units
$I_{F(AV)}$	30	A
V_{RRM}	60	V
I_{FSM} @ $t_p = 8.3ms$ half-sine	120	A
V_F @ $30A_{pk}$, $T_J = 125^\circ C$	0.88	V
T_J, T_{stg} Operating and storage	-55 to 150	$^\circ C$

Description/Features

The 30SLJQ060 Schottky rectifier has been expressly designed to meet the rigorous requirements of hi-rel environments. It is packaged in the hermetic surface mount SMD-0.5 ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Surface Mount
- Lightweight

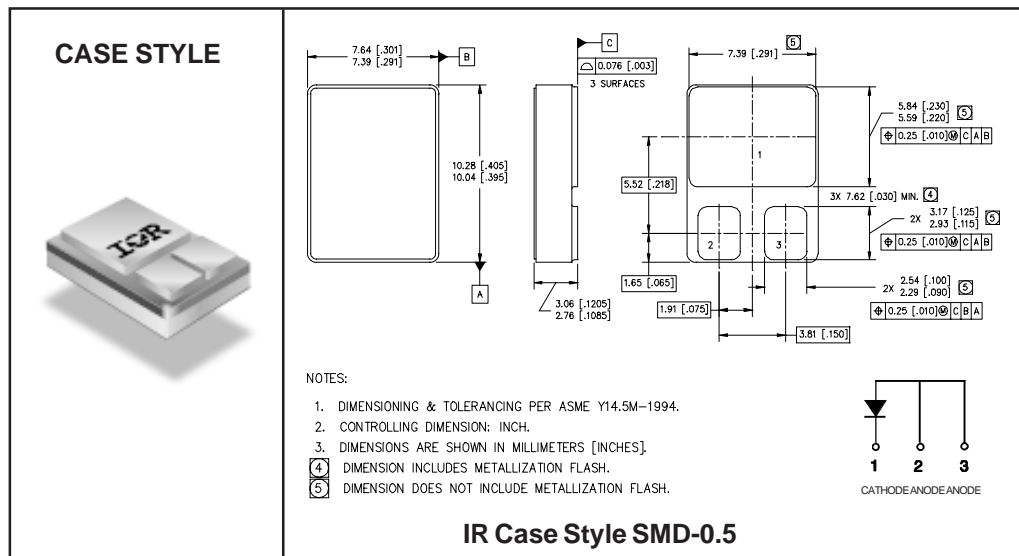

Voltage Ratings

Part number	30SLJQ060
V_R Max. DC Reverse Voltage (V)	60
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Limits	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current See Fig. 5	30	A	50% duty cycle @ $T_C = 70^\circ\text{C}$, square waveform
I_{FSM} Max. Peak One Cycle Non - Repetitive Surge Current	120	A	@ $t_p = 8.3$ ms half-sine

Electrical Specifications

Parameters	Limits	Units	Conditions	
V_{FM} Max. Forward Voltage Drop See Fig. 1①	0.83	V	@ 30A	$T_J = -55^\circ\text{C}$
	1.18	V	@ 60A	
	0.92	V	@ 30A	$T_J = 25^\circ\text{C}$
	1.32	V	@ 60A	
	0.88	V	@ 30A	$T_J = 125^\circ\text{C}$
	1.24	V	@ 60A	
I_{RM} Max. Reverse Leakage Current See Fig. 2②	0.6	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	50	mA	$T_J = 100^\circ\text{C}$	
	100	mA	$T_J = 125^\circ\text{C}$	
C_T Max. Junction Capacitance	700	pF	$V_R = 5V_{DC}$ (1MHz, 25°C)	
L_S Typical Series Inductance	4.8	nH	Measured from center of cathode pad to center of anode pad	

Thermal-Mechanical Specifications

Parameters	Limits	Units	Conditions	
T_J Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$		
T_{stg} Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$		
R_{thJC} Max. Thermal Resistance, Junction to Case	2.0	$^\circ\text{C/W}$	DC operation	See Fig. 4
wt Weight (Typical)	1.0	g		
Die Size (Typical)	105X125	mils		
Case Style	SMD-0.5			

① Pulse Width < 300 μs , Duty Cycle < 2%

② Pins 2 and 3 externally tied together

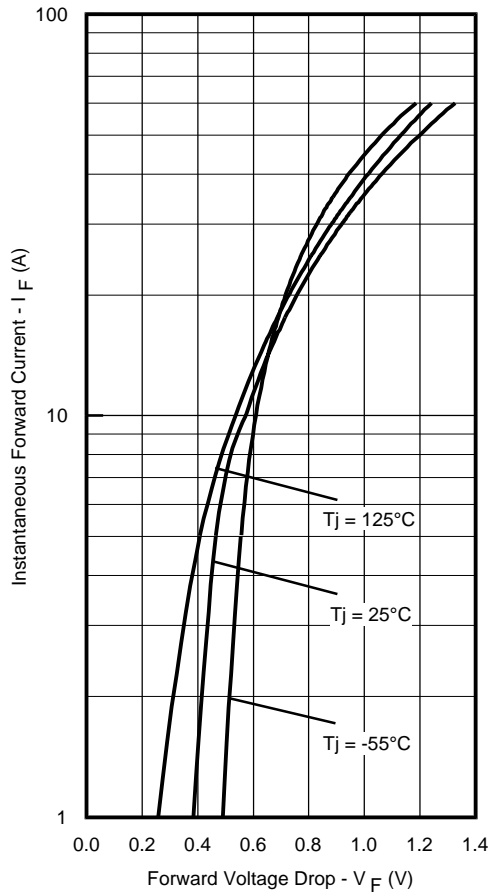


Fig. 1 - Max. Forward Voltage Drop Characteristics

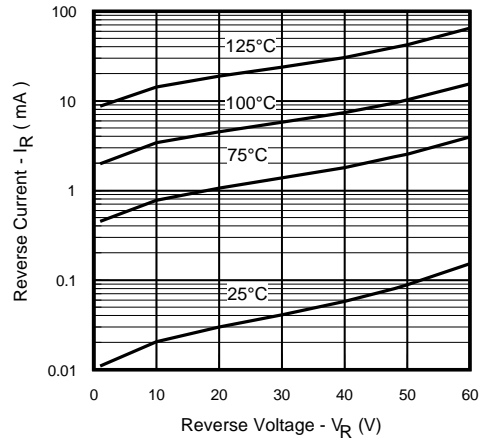


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

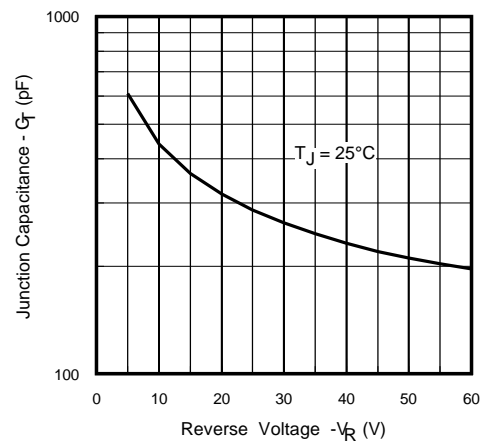


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

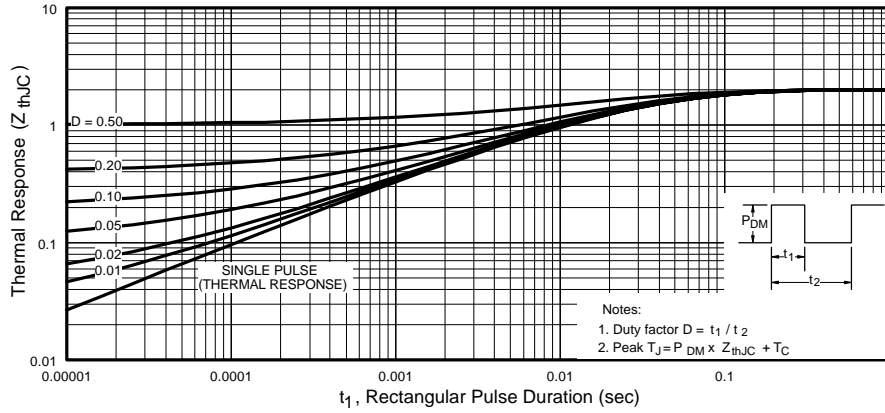


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

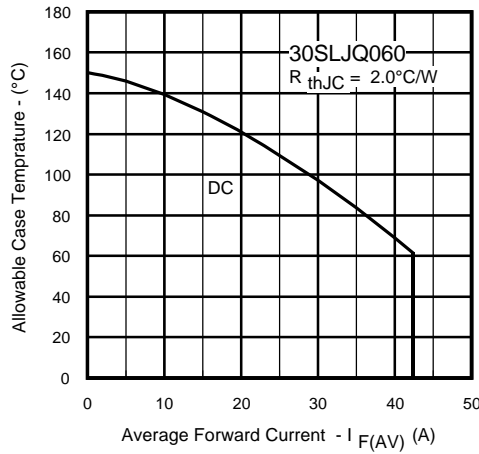


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current