


INTERNATIONAL RECTIFIER

REPETITIVE AVALANCHE RATED AND dv/dt RATED

HEXFET[®] TRANSISTOR

IRFV360



N-CHANNEL

400 Volt, 0.20 Ohm HEXFET

The HEXFET[®] technology is the key to International Rectifier's advanced line of power MOSFET transistors. The efficient geometry design achieves very low on-state resistance combined with high transconductance.

The HEXFET transistors also feature all of the well established advantages of MOSFETs such as voltage control, very fast switching, ease of paralleling and temperature stability of the electrical parameters.

They are well suited for applications such as switching power supplies and virtually any application where military and/or high reliability is required.


Product Summary

Part Number	V_{DSS}	$R_{DS(on)}$	I_D
IRFV360	400V	0.20 Ω	25A


FEATURES:

- Repetitive Avalanche Rating
- Dynamic dv/dt Rating
- Isolated and Hermetically Sealed
- Alternative to TO-3 Package
- Simple Drive Requirements
- Ease of Paralleling
- Ceramic Eyelets

CASE STYLE AND DIMENSIONS

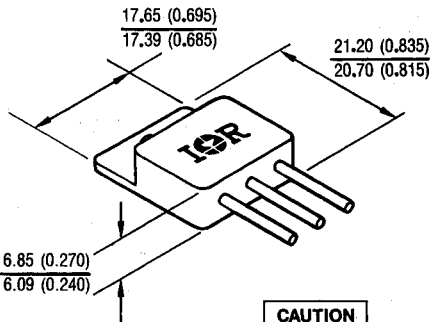

BERYLLIA WARNING PER MIL-S-19500
SEE PAGE I-482.

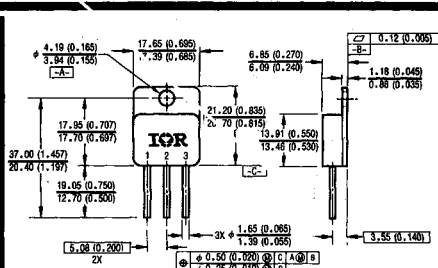

NOTES:

- 1 DIMENSIONING & TOLERANCING PER ANSI Y14.5M - 1982.
- 2 ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).

*For optional leadforms see page I-462, fig. 15

Conforms to JEDEC Outline TO-258AA*
Dimensions in Millimeters and (Inches)

LEGEND

- 1 DRAIN
- 2 SOURCE
- 3 GATE

Absolute Maximum Ratings


Parameter	IRFV360	Units
I_D @ $V_{GS} = 10V, T_C = 25^\circ C$ Continuous Drain Current	25	A
I_D @ $V_{GS} = 10V, T_C = 100^\circ C$ Continuous Drain Current	16	
I_{DM} Pulsed Drain Current ①	100	
P_D @ $T_C = 25^\circ C$ Max. Power Dissipation	300	W
Linear Derating Factor	2.4	W/K ⑤
V_{GS} Gate-to-Source Voltage	± 20	V
E_{AS} Single Pulse Avalanche Energy ②	980	mJ
I_{AR} Avalanche Current ①	25	A
E_{AR} Repetitive Avalanche Energy ①	30	mJ
dv/dt Peak Diode Recovery dv/dt ③	4.0	V/ns
T_J Operating Junction Temperature	-55 to 150	°C
T_{STG} Storage Temperature Range		
Lead Temperature	300 (0.063 in. (1.6 mm) from case for 10s)	
Weight	10.9 (typical)	g

Electrical Characteristics @ $T_J = 25^\circ C$ (Unless Otherwise Specified)

Parameter	Min.	Typ.	Max.	Units	Test Conditions
BV_{DSS} Drain-to-Source Breakdown Voltage	400	—	—	V	$V_{GS} = 0V, I_D = 1.0 mA$
$\Delta BV_{DSS}/\Delta T_J$ Temperature Coefficient of Breakdown Voltage	—	0.46	—	V/°C	Reference to 25°C, $I_D = 1.0 mA$
$R_{DS(on)}$ Static Drain-to-Source On-State Resistance	—	—	0.20	Ω	$V_{GS} = 10V, I_D = 16A$ ④
	—	—	0.23	Ω	
$V_{GS(th)}$ Gate Threshold Voltage	2.0	—	4.0	V	$V_{DS} = V_{GS}, I_D = 250 \mu A$
g_{fs} Forward Transconductance	14	—	—	S (S)	$V_{DS} \geq 15V, I_{DS} = 16A$ ④
I_{DSS} Zero Gate Voltage Drain Current	—	—	25	μA	$V_{DS} = 0.8 \times \text{Max. Rating}, V_{GS} = 0V$
	—	—	250		$V_{DS} = 0.8 \times \text{Max. Rating}$
	—	—	—		$V_{GS} = 0V, T_J = 125^\circ C$
I_{GSS} Gate-to-Source Leakage Forward	—	—	100	nA	$V_{GS} = 20V$
I_{GSS} Gate-to-Source Leakage Reverse	—	—	-100	nA	$V_{GS} = -20V$
Q_g Total Gate Charge	—	—	210	nC	$V_{GS} = 10V, I_D = 25A$
Q_{gs} Gate-to-Source Charge	—	—	28		$V_{DS} = 0.5 \times \text{Max. Rating}$
Q_{gd} Gate-to-Drain ("Miller") Charge	—	—	120		See Fig. 6 and 14
$t_{d(on)}$ Turn-On Delay Time	—	—	33		$V_{DD} = 200V, I_D = 25A, R_G = 2.35\Omega$
t_r Rise Time	—	—	140	ns	See Fig. 11
$t_{d(off)}$ Turn-Off Delay Time	—	—	120		
t_f Fall Time	—	—	99		
L_D Internal Drain Inductance	—	8.7	—	nH	Measured from the drain lead, 6 mm (0.25 in.) from package to center of die. Modified MOSFET symbol showing the internal inductances.
L_S Internal Source Inductance	—	8.7	—		
C_{iss} Input Capacitance	—	4200	—	pF	$V_{GS} = 0V, V_{DS} = 25V$ $f = 1.0 MHz$ See Fig. 5 $f = 1.0 MHz$
C_{oss} Output Capacitance	—	900	—		
C_{rss} Reverse Transfer Capacitance	—	400	—		
C_{DC} Drain-to-Case Capacitance	—	12	—		



Source-Drain Diode Ratings and Characteristics

Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_S Continuous Source Current (Body Diode)	—	—	25	A	Modified MOSFET symbol showing the integral Reverse p-n junction rectifier. 
I_{SM} Pulsed Source Current (Body Diode) ①	—	—	100		
V_{SD} Diode Forward Voltage	—	—	1.8	V	$T_J = 25^\circ\text{C}$, $I_S = 25\text{A}$, $V_{GS} = 0\text{V}$ ④
t_{rr} Reverse Recovery Time	—	—	1000	nS	$T_J = 25^\circ\text{C}$, $I_F = 25\text{A}$, $dI/dt \leq 100\text{ A}/\mu\text{s}$ ④
Q_{RR} Reverse Recovery Charge	—	—	16	μC	$V_{DD} \leq 50\text{V}$
t_{on} Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by $L_S + L_D$.				

Thermal Resistance

Parameter	Min.	Typ.	Max.	Units	Test Conditions
R_{thJC} Junction-to-Case	—	—	0.42	K/W ⑤	
R_{thCS} Case-to-Sink	—	0.21	—		Mounting surface flat, smooth, and greased
R_{thJA} Junction-to-Ambient	—	—	30		Typical socket mount

① Repetitive Rating; Pulse width limited by maximum junction temperature (see figure 9) Refer to current HEXFET reliability report

② @ $V_{DD} = 50\text{V}$, Starting $T_J = 25^\circ\text{C}$, $L \geq 2.7\text{ mH}$, $R_G = 25\Omega$, Peak $I_L = 25\text{A}$

③ $I_{SD} \leq 25\text{A}$, $dI/dt \leq 170\text{ A}/\mu\text{s}$, $V_{DD} \leq 6V_{DSS}$, $T_J \leq 150^\circ\text{C}$ Suggested $R_G = 2.35\Omega$

④ Pulse width $\leq 300\ \mu\text{s}$; Duty Cycle $\leq 2\%$

⑤ $K/W = ^\circ\text{C}/W$
 $W/K = W/^\circ\text{C}$



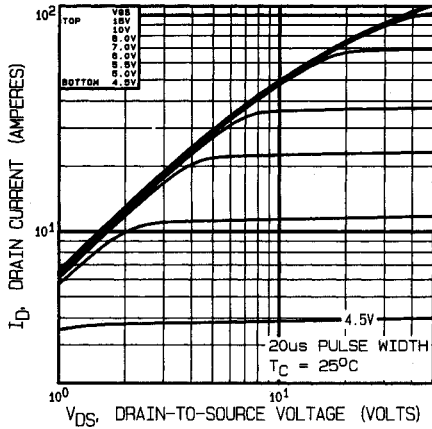


Fig. 1 — Typical Output Characteristics, $T_C = 25^\circ\text{C}$

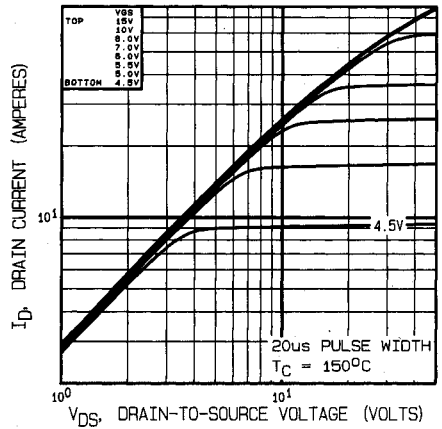


Fig. 2 — Typical Output Characteristics, $T_C = 150^\circ\text{C}$

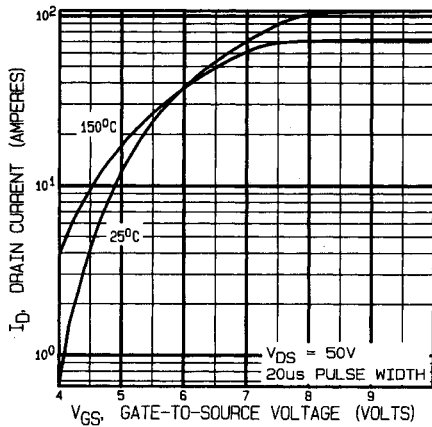


Fig. 3 — Typical Transfer Characteristics

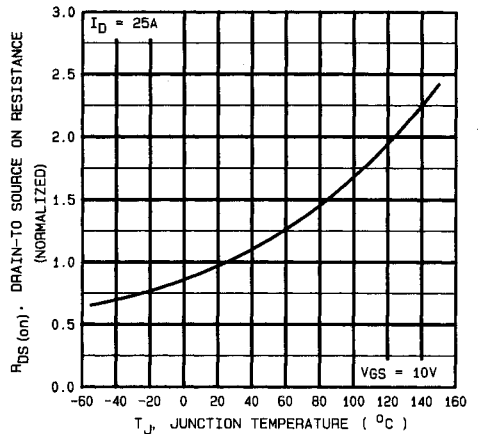


Fig. 4 — Normalized On-Resistance Vs. Temperature

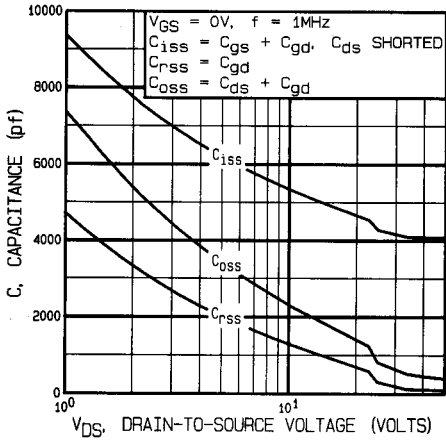


Fig. 5 — Typical Capacitance Vs. Drain-to-Source Voltage

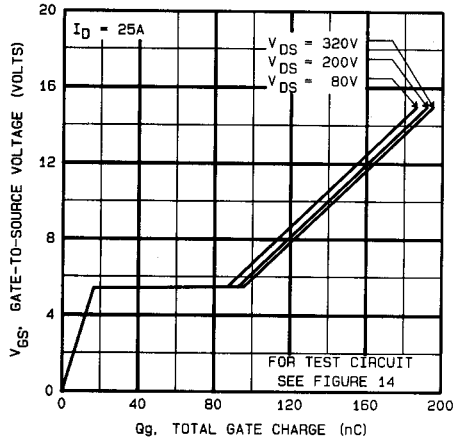


Fig. 6 — Typical Gate Charge Vs. Gate-to-Source Voltage

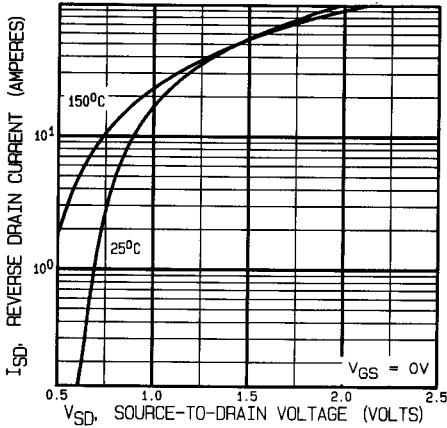


Fig. 7 — Typical Source-Drain Diode Forward Voltage

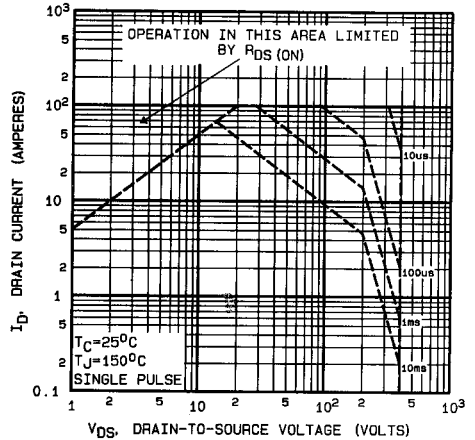


Fig. 8 — Maximum Safe Operating Area

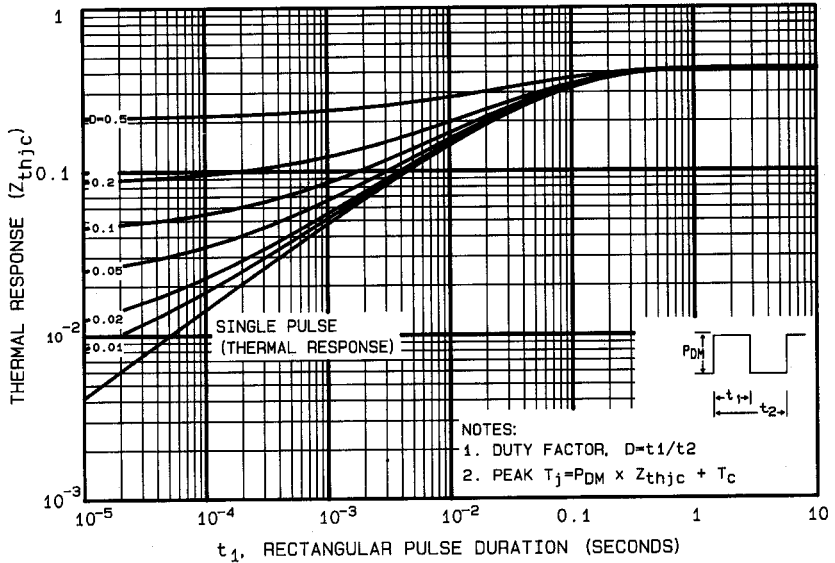


Fig. 9 — Maximum Effective Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

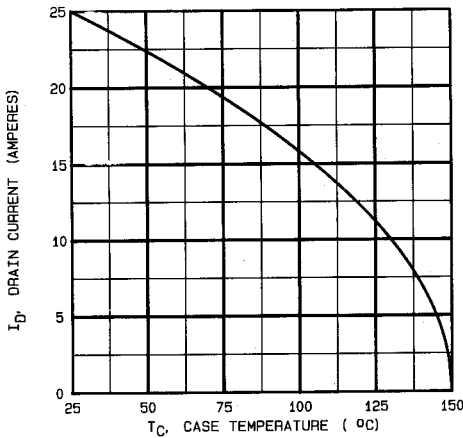


Fig. 10 — Maximum Drain Current Vs. Case Temperature




Fig. 11a — Switching Time Test Circuit

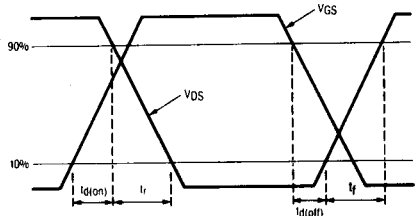
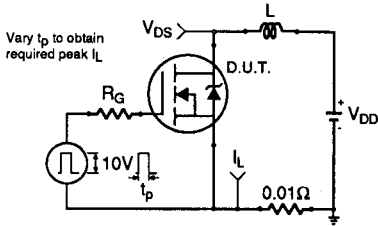

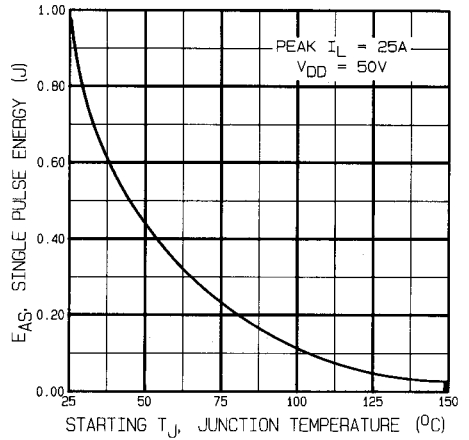
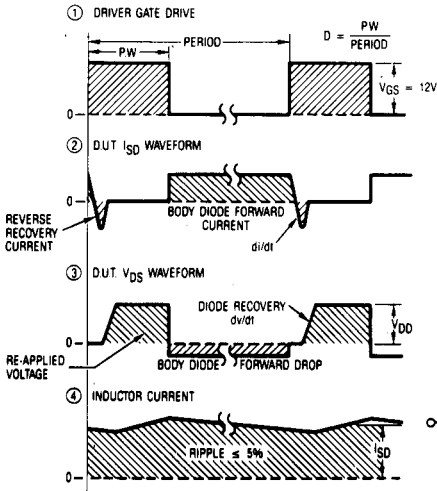
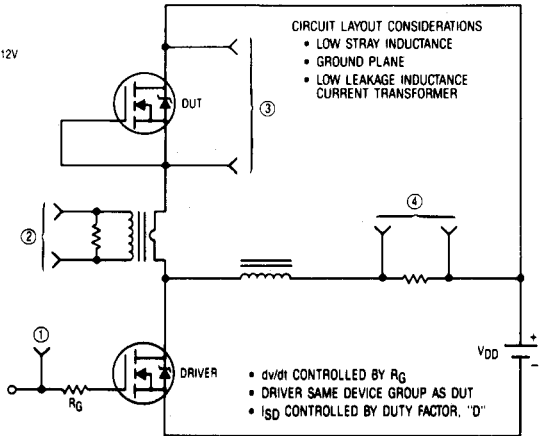


Fig. 11b — Switching Time Waveforms


Fig. 12a — Unclamped Inductive Test Circuit

Fig. 12b — Unclamped Inductive Waveforms

Fig. 12c — Maximum Avalanche Energy Vs. Starting Junction Temperature

Fig. 13 — Peak Diode Recovery dv/dt Test Circuit

I




Fig. 14a — Basic Gate Charge Waveform




Fig. 14b — Gate Charge Test Circuit

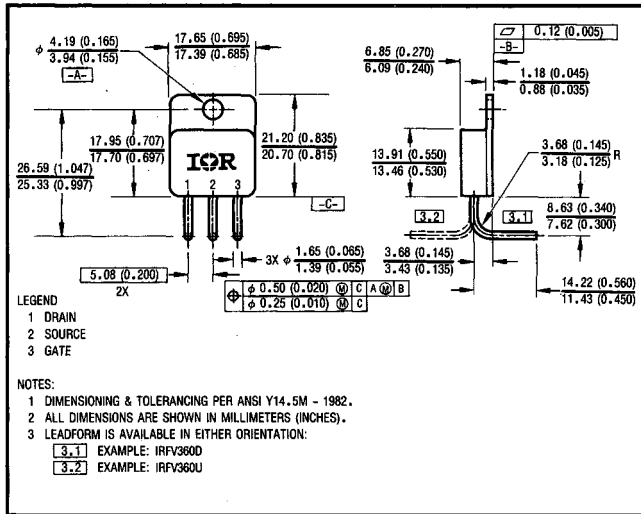


Fig. 15 — Optional Leadforms for Outline TO-258

BERYLLIA WARNING PER MIL-S-19500

Packages containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.