

**EMI FILTER
PROTECTION HYBRID**




Description

The AFM704A is a combined EMI filter and protection module intended to be used with AHE, ATO, ATR, ATW, AHF, ASA, and AHV DC/DC converters to allow full compliance with the surge requirements of MIL-STD-704A. This device will reduce reflected ripple current to levels below the CEO3 limits and protect against voltage spikes required by CS06 testing as specified by MIL-STD-461. Four levels of military screening are available, including fully compliant (per MIL-PRF-38534) devices. Standard Military Drawings (SMDs) available.

Features

- 40 watts throughout
- 40 dB Noise Reduction@100 kHz
- -55°C to +125°C Operation
- Full Military Screening
- All Ceramic Capacitor Design
- Output Voltage Regulate to 50 Volts Maximum
- Inrush Current Limiting
- Under Voltage Lockout

AFM704A Block Diagram

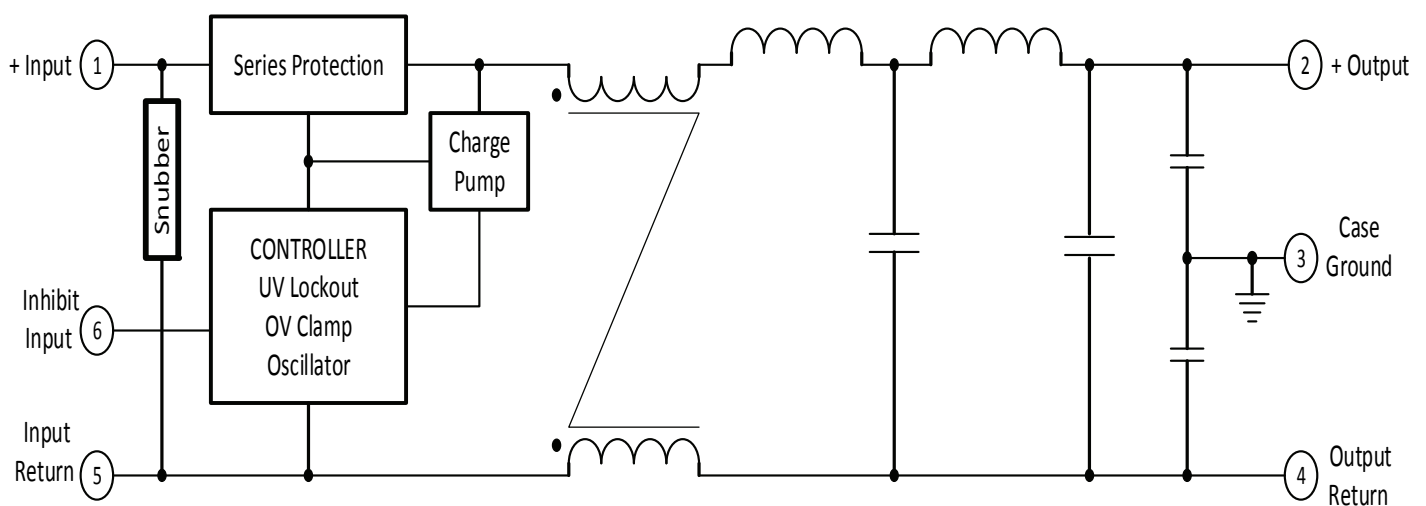

Refer to page 3 for Pin Designation Table

Specifications T_{case} = -55°C to +125°C, V_{in} = +28V_{DC} unless otherwise specified


Parameter	Condition	Min.	Typ.	Max.	Unit
Input voltage	Continuous No load 40 watt	0 16	28 28	40 40	V _{DC} V _{DC}
	Transient 100 ms, R _s *= 0 Ohms			80	V _{DC}
	60 ms, R _s *= 0.5 Ohms 20 μs, R _s *= 50 Ohms			100 600	V _{DC} V _{DC}
Under voltage lockout		13		15	V _{DC}
Input current	No load Inhibited			5.0	mA
				2.0	mA
Inhibit pin voltage	Open circuit		4.0	5.2	V _{DC}
Inhibit pin current	V _{IN} = 0 to 0.8V			-300	μA
Output power	V _{IN} = 16 to 40V			40	watts
Power dissipation	Continuous Peak			15	watts
				200	watts
DC resistance	V _{IN} = 16 to 40V T _C = 25°C			0.45	Ω
Output clamp voltage		40		50	V _{DC}
Input surge limit	40W load, 80V 100V			100	ms
				80	ms
Input spike limit	40W load, 600V 50 Ω source 40W load, 400V 0.5 Ω source			20	μs
				20	μs
Noise reduction	100 kHz 200 kHz – 50 MHz	40			dB
		50	60		dB
Capacitance	Pin to case		10,000		pF
Isolation	Pin to case 500V _{DC}	100			MΩ
Weight				75	grams

* R_s = Source Impedance

Available Standard Military Drawing (SMD) Cross Reference

Standard Military Drawing PIN	Vendor CAGE Code	Vendor Similar PIN
95010-01HXA	52467	AFM704AN/CH
95010-01HZA	52467	AFM704A/CH

Mechanical Outline

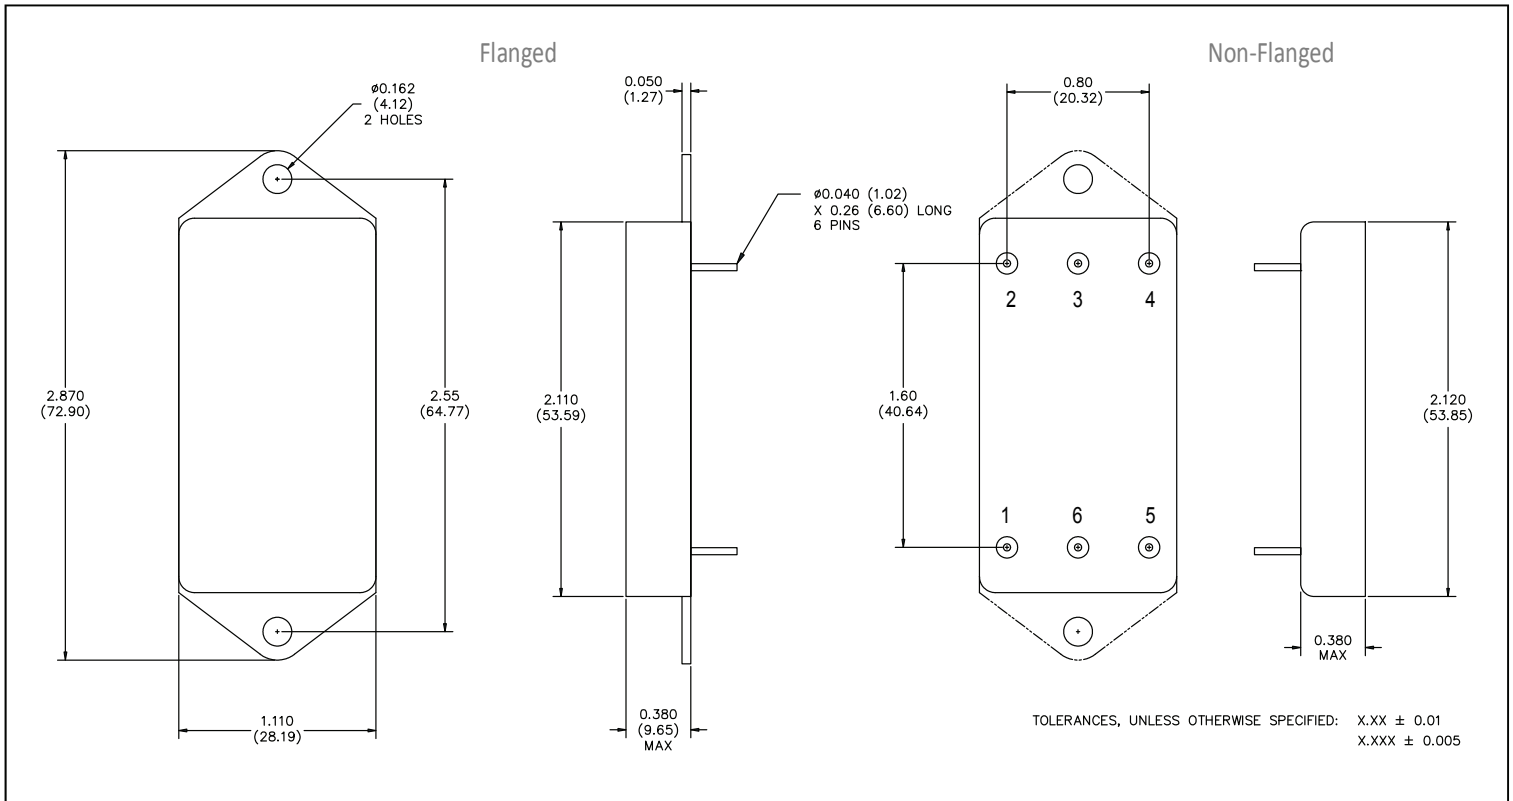

Pin Designation


Pin #	Designation
1	+ Input
2	+ Output
3	Case Ground
4	Output Return
5	Input Return
6	Inhibit Input

Available Screening Levels and Process Variations

Requirement	MIL-STD-883 Method	No Suffix	ES Suffix	HB Suffix	CH Suffix
Temperature Range	—	-20 to +85°C	-55°C to +125°C	-55°C to +125°C	-55°C to +125°C
Element Evaluation	—	—	—	—	MIL-PRF-38534
Internal Visual	2017	*	Yes	Yes	Yes
Temperature Cycle	1010	—	Cond B	Cond C	Cond C
Constant Acceleration	2001	—	500g	Cond A	Cond A
Burn-in	1015	48hrs @ 85°C	48hrs @ 125°C	160hrs @ 125°C	160hrs @ 125°C
Final Electrical (Group A)	MIL-PRF-38534 & Specification	25°C	25°C	-55°C, +25°C, +125°C	-55°C, +25°C, +125°C
Seal, Fine & Gross	1014	Cond A	Cond A, C	Cond A, C	Cond A, C
External Visual	2009	*	Yes	Yes	Yes

* Per Commercial Standards.

Part Numbering

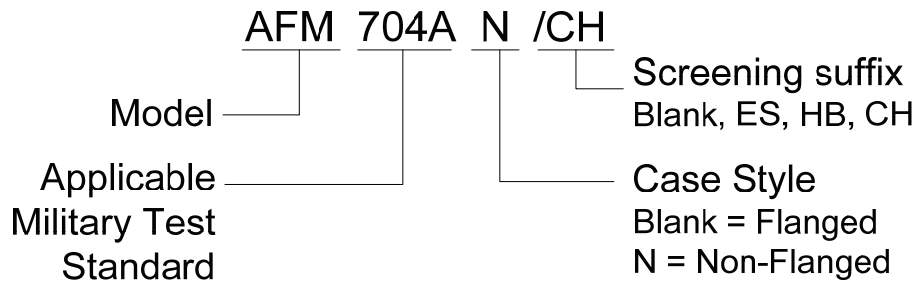

IMPORTANT NOTICE

The information given in this document shall be in no event regarded as guarantee of conditions or characteristic. The data contained herein is a characterization of the component based on internal standards and is intended to demonstrate and provide guidance for typical part performance. It will require further evaluation, qualification and analysis to determine suitability in the application environment to confirm compliance to your system requirements.

With respect to any example hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind including without limitation warranties on non- infringement of intellectual property rights and any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's product and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of any customer's technical departments to evaluate the suitability of the product for the intended applications and the completeness of the product information given in this document with respect to applications.

For further information on the product, technology, delivery terms and conditions and prices, please contact your local sales representative or go to (www.infineon.com/hirel).

WARNING

Due to technical requirements products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.