


Turbo 2 ultrafast high voltage rectifier

Datasheet - production data

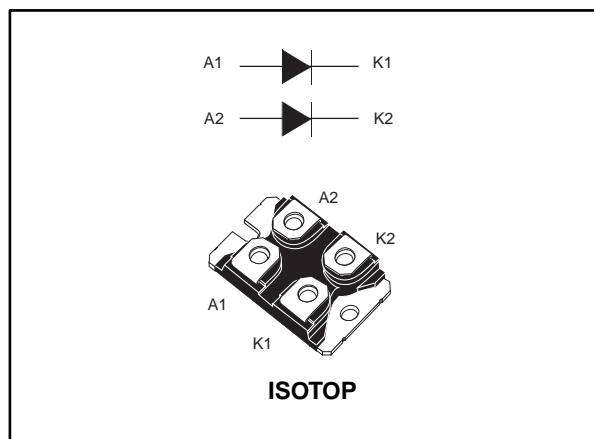

Features

- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduces switching and conduction losses
- Insulated package ISOTOP:
 - Insulated voltage: 2500 V_{RMS} sine

Description

This device, which uses ST Turbo 2 600 V technology, is especially suited for use in switching power supplies and industrial applications, like rectification and freewheeling diodes.

Table 1: Device summary

| Symbol | Value |
|-----------------|-----------------|
| $I_{F(AV)}$ | up to 2 x 120 A |
| V_{RRM} | 600 V |
| T_j (max.) | 150 °C |
| V_F (typ.) | 0.95 V |
| t_{rr} (max.) | 80 ns |

 TM: ISOTOP is a trademark of STMicroelectronics

1 Characteristics

Table 2: Absolute ratings (limiting values, per diode)

| Symbol | Parameter | | Value | Unit |
|---------------------|--|-----------------------------------|-------------|------|
| V _{RRM} | Repetitive peak reverse voltage | | 600 | V |
| I _{F(RMS)} | Forward rms current | | 180 | A |
| I _{F(AV)} | Average forward current, δ = 0.5 | T _c = 65 °C, per diode | 100 | A |
| | | T _c = 35 °C, per diode | 120 | |
| I _{FSM} | Surge non repetitive forward current | t _p = 10 ms sinusoidal | 800 | A |
| T _{stg} | Storage temperature range | | -55 to +150 | °C |
| T _j | Maximum operating junction temperature | | 150 | °C |

Table 3: Thermal parameters

| Symbol | Parameter | | Maximum values | Unit |
|----------------------|------------------|-----------|----------------|------|
| R _{th(j-c)} | Junction to case | Per diode | 0.60 | °C/W |
| | | Total | 0.35 | |
| R _{th(c)} | Coupling | | 0.1 | |

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j (\text{diode1}) = P_{(\text{diode1})} \times R_{\text{th(j-c)}} (\text{per diode}) + P_{(\text{diode2})} \times R_{\text{th(c)}}$$

Table 4: Static electrical characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|-------------------------------|-------------------------|-------------------------|-----------------------------------|------|------|------|------|
| I _R ⁽¹⁾ | Reverse leakage current | T _j = 25 °C | V _R = V _{RRM} | - | | 100 | μA |
| | | T _j = 125 °C | | - | 100 | 1000 | |
| V _F ⁽²⁾ | Forward voltage drop | T _j = 25 °C | I _F = 100 A | - | | 1.55 | V |
| | | T _j = 150 °C | | - | 0.95 | 1.20 | |

Notes:

(1)Pulse test: t_p = 5 ms, δ < 2%

(2)Pulse test: t_p = 380 μs, δ < 2%

To evaluate the maximum conduction losses, use the following equation:







$$P = 0.93 \times I_{F(AV)} + 0.0027 \times I_{F(RMS)}^2$$








Table 5: Dynamic characteristics (per diode)

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|----------|--------------------------|-----------------------|--|------|------|------|------|
| t_{rr} | Reverse recovery time | $T_j = 25\text{ °C}$ | $I_F = 0.5\text{ A}$, $I_{rr} = 0.25\text{ A}$, $I_R = 1\text{ A}$ | - | | 80 | ns |
| | | | $I_F = 1\text{ A}$, $dI_F/dt = 50\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$ | - | 85 | 120 | |
| I_{RM} | Reverse recovery current | $T_j = 125\text{ °C}$ | $I_F = 100\text{ A}$, $dI_F/dt = 400\text{ A}/\mu\text{s}$, $dI_F/dt = 100\text{ A}/\mu\text{s}$ | - | 15 | 20 | A |
| t_{fr} | Forward recovery time | $T_j = 25\text{ °C}$ | $I_F = 100\text{ A}$, $dI_F/dt = 200\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$ | - | | 700 | ns |
| V_{FP} | Forward recovery voltage | $T_j = 25\text{ °C}$ | $I_F = 100\text{ A}$, $dI_F/dt = 200\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$ | - | 3.4 | | V |

1.1 Characteristics (curves)

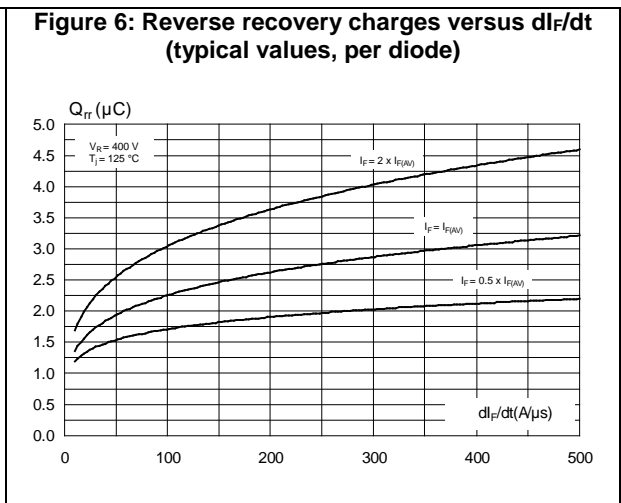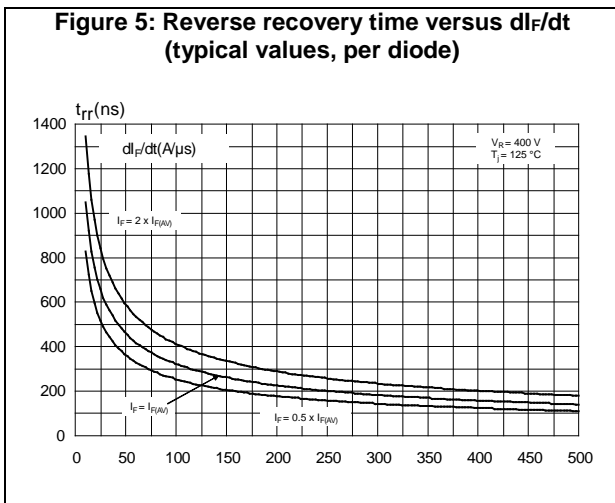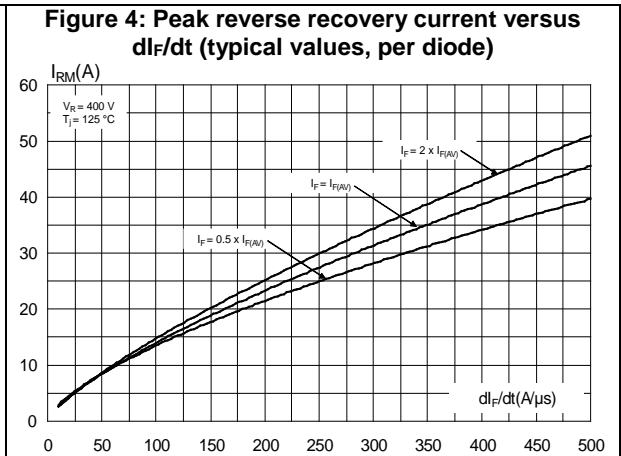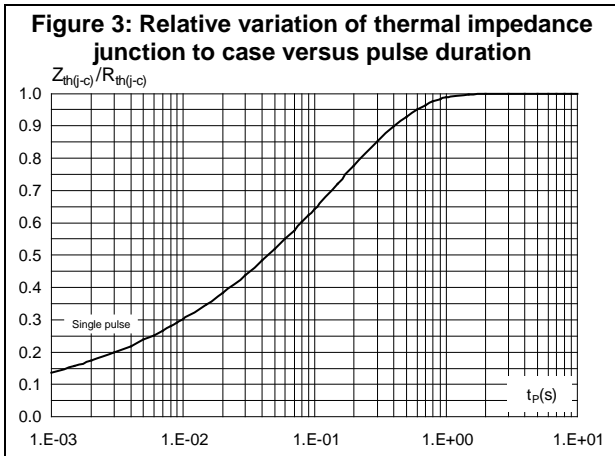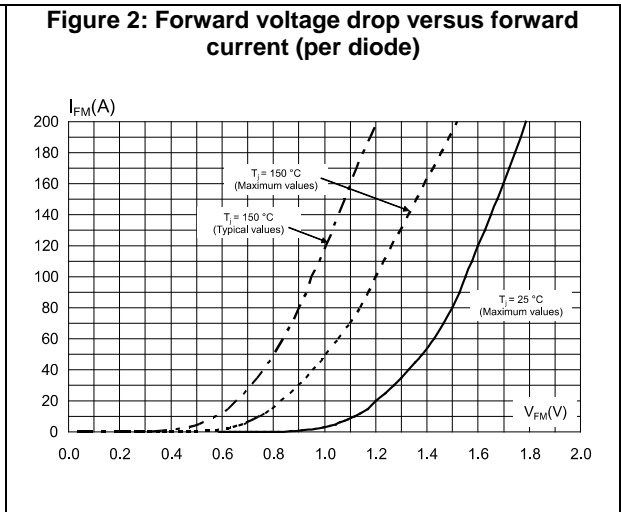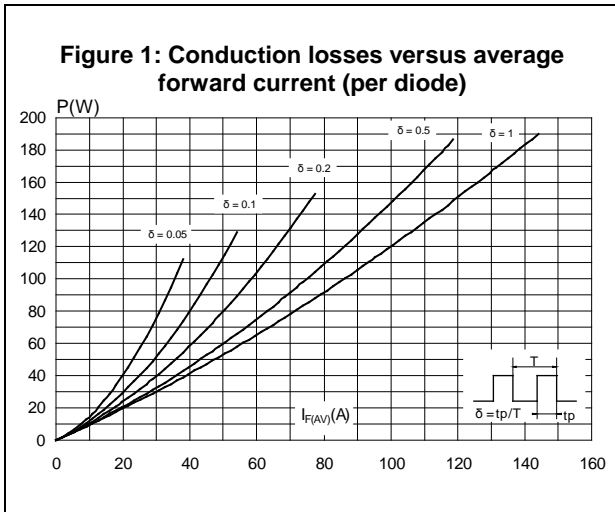

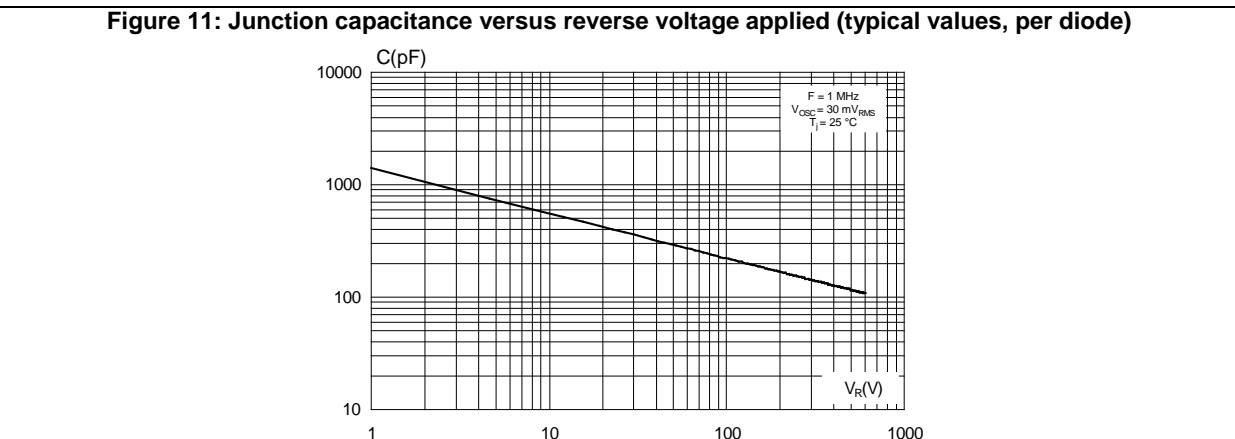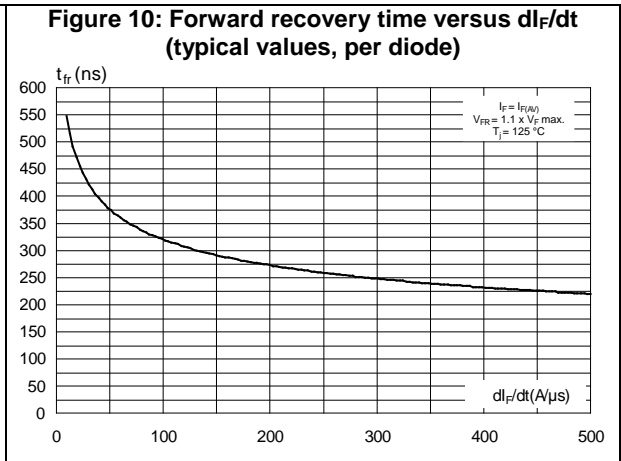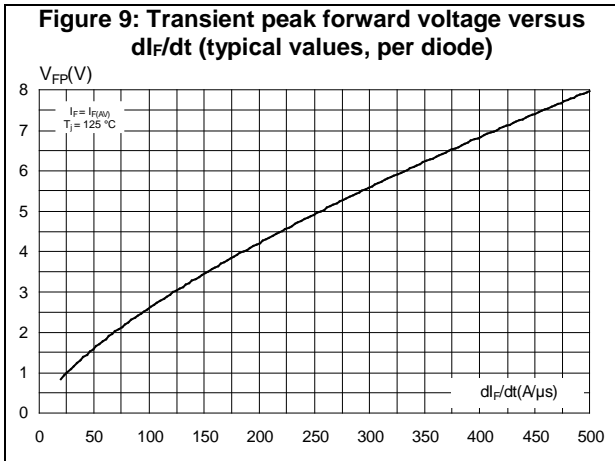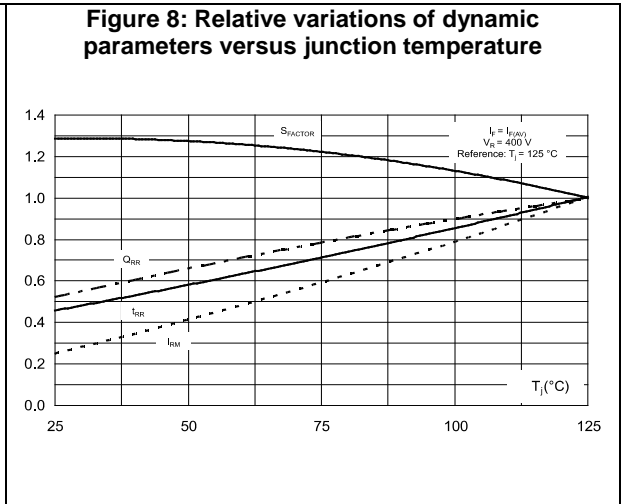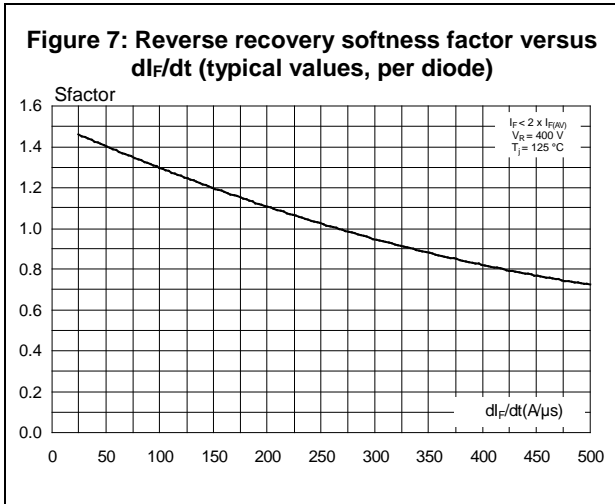

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 1.3 N·m
- Maximum torque value: 1.5 N·m

STMicroelectronics strongly recommends the use of the screws delivered with this product.

The use of any other screws is entirely at the user's own risk and will invalidate the warranty.

2.1 ISOTOP package information

Figure 12: ISOTOP package outline

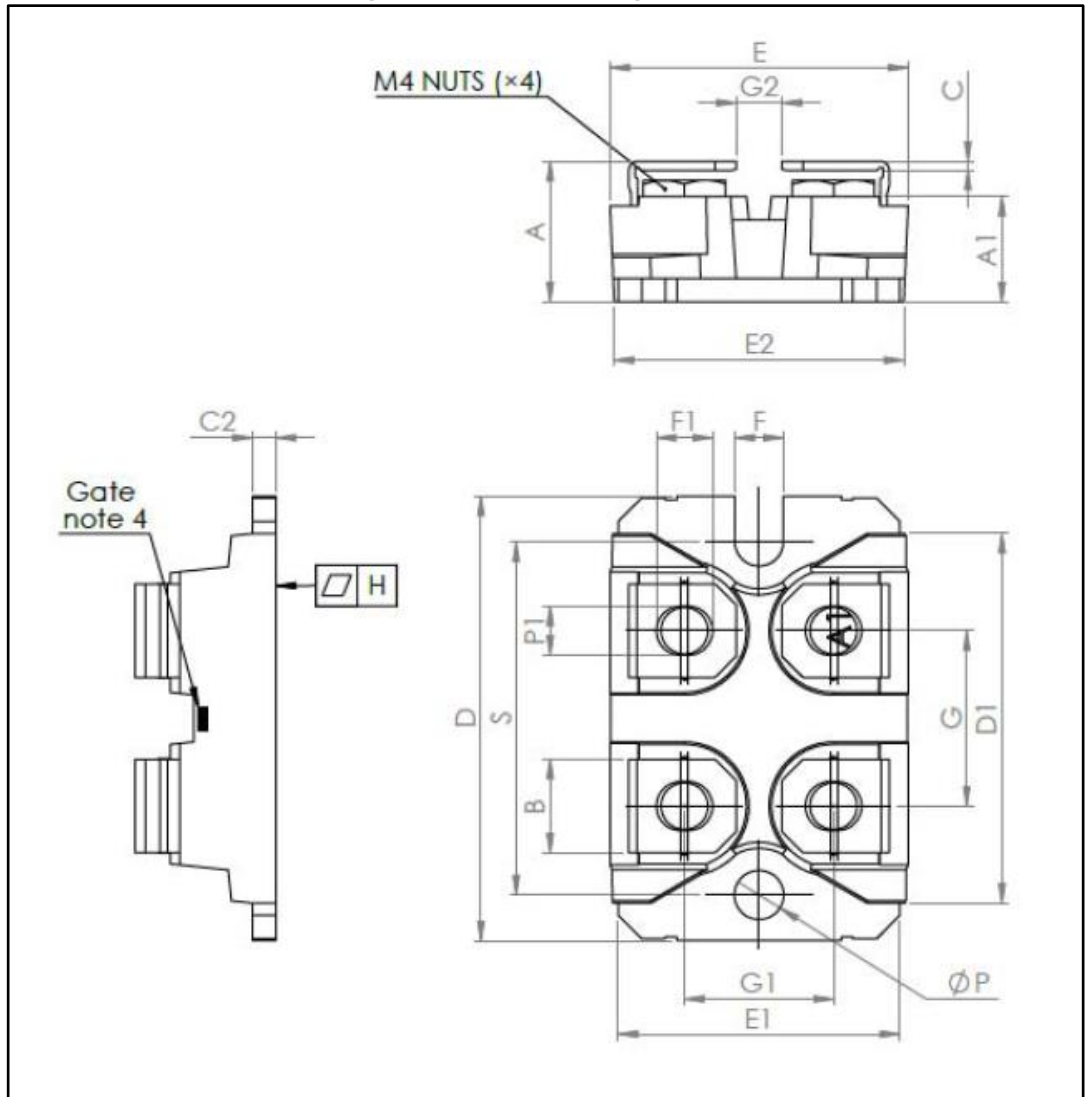


Table 6: ISOTOP package mechanical data

| Ref. | Dimensions | | | |
|--------|-------------|-------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 11.80 | 12.20 | 0.460 | 0.480 |
| A1 | 8.90 | 9.10 | 0.350 | 0.358 |
| B | 7.80 | 8.20 | 0.307 | 0.323 |
| C | 0.75 | 0.85 | 0.030 | 0.033 |
| C2 | 1.95 | 2.05 | 0.077 | 0.081 |
| D | 37.80 | 38.20 | 1.488 | 1.504 |
| D1 | 31.50 | 31.70 | 1.240 | 1.248 |
| E | 25.15 | 25.50 | 0.990 | 1.004 |
| E1 | 23.85 | 24.15 | 0.939 | 0.951 |
| E2 | 24.80 | | 0.976 | |
| G | 14.90 | 15.10 | 0.587 | 0.594 |
| G1 | 12.60 | 12.80 | 0.496 | 0.504 |
| G2 | 3.50 | 4.30 | 0.138 | 0.169 |
| F | 4.10 | 4.30 | 0.161 | 0.169 |
| F1 | 4.60 | 5 | 0.181 | 0.197 |
| H | -0.05 | 0.1 | -0.002 | 0.004 |
| Diam P | 4 | 4.30 | 0.157 | 0.69 |
| P1 | 4 | 4.30 | 0.157 | 0.69 |
| S | 30.10 | 30.30 | 1.185 | 1.193 |

3 Ordering information

Table 7: Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|---------------|---------------|---------|--------------------------|---------------------|---------------|
| STTH200L06TV1 | STTH200L06TV1 | ISOTOP | 27 g (without screws) | 10 (with screws) | Tube |

4 Revision history

Table 8: Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 07-Sep-2004 | 1 | First issue. |
| 05-Sep-2011 | 2 | Updated <i>Figure 6</i> . |
| 06-Nov-2017 | 3 | Updated Section "Features" and Section 2.1: "ISOTOP package information" . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved